
Art.-Nr: KWIW039
Emergency light Centralised power supply systems Universal, Without monitoring, CPS, IP65, Polycarbonate, White, Flexiklick

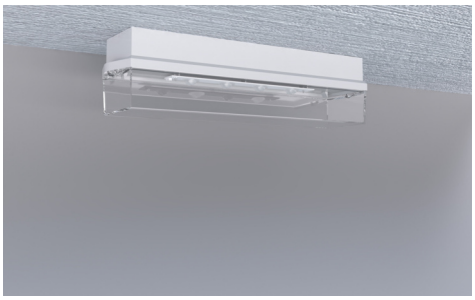

Classic bar-shaped polycarbontate luminaire for wall or ceiling mounting. Straight lines as well as the robust construction with a high ingress protection allow versatile use.

The luminaire is fitted with the innovative flexible plug-in system for rapid use of the right lens. The corridor lens is supplied with every luminaire. A round lens, spotlight lens and beam lens are available as options.


More information
www.rp-group.com/en/item/KWIW039

TECHNICAL DATA

Luminaire type	Emergency light
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	Waste disposal, CE, D-sign, Type-tested, ENEC
Insulation class	2
Supply	Centralised power supply systems
Monitoring	Without monitoring
Bridging time	CPS
Battery	/
Operating mode	Permanent circuit
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	100-254 V
Power max.	9 W
Power maintained	9 W

Power non-maintained	0 W
Ambient temperature maintained mode	-20 °C to 40 °C
Ambient temperature non-maintained mode	-20 °C to 40 °C
Depth	86 mm
Width	390 mm
Height	99 mm
Weight	0.64
Weight incl. packaging	0.74
Connection cross-section	1.5 mm²
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	No
Luminous flux mains	780 lm
Luminous flux emergency	780 lm
Customs tariff number	94056120
GTIN	4260659566432

TECHNICAL DRAWING

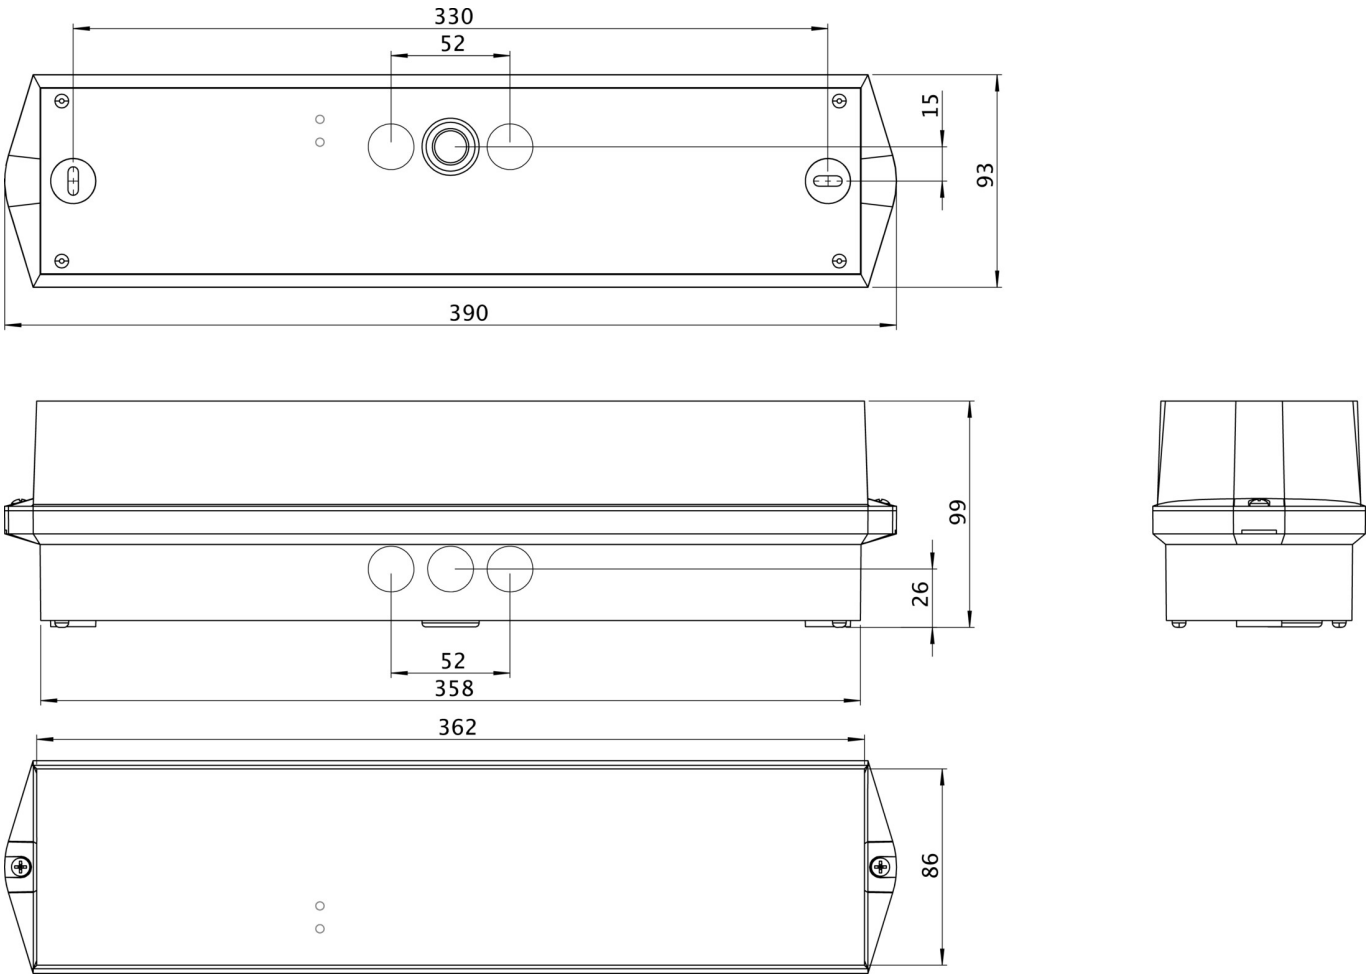

ACCESSORY LIST

BKW - Robust steel protective grille for emergency lighting

KWIE - Installation frame

As of: 15.11.2026 - Subject to technical changes and errors.