



**Art.-Nr: KWIW013SC**

**Exit sign, Emergency light Self-contained**

**Wall mounting, 3 h, 16 m, IP65, Polycarbonate, White, Set of pictograms**

Classic, robust, plastic, beam-like emergency exit sign luminaire with a high level of protection and self-adhesive pictogram for versatile use.

Intended for wall mounting when used as an emergency exit sign luminaire.

Without the use of pictograms, it can be used as a safety luminaire, preferably for ceiling mounting.

Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information

[www.rp-group.com/en/item/KWIW013SC](http://www.rp-group.com/en/item/KWIW013SC)



**TECHNICAL DATA**


|                        |                             |
|------------------------|-----------------------------|
| Luminaire type         | Exit sign, Emergency light  |
| Mounting               | Wall mounting               |
| Recognition distance   | 16 m                        |
| Pictograph             | Set                         |
| Illuminant             | LED                         |
| Housing material       | Polycarbonate               |
| Housing color          | White                       |
| Protection type (IP)   | IP65                        |
| Impact resistance (IK) | 6                           |
| Certification          | CE, WEEE, D-Sign            |
| Insulation class       | 2                           |
| Supply                 | Self-contained              |
| Monitoring             | SelfControl (SC)            |
| Bridging time          | 3 h                         |
| Battery                | NIMH 4,8 V/2,0 Ah           |
| Operating mode         | Non-maintained / maintained |
| Input voltage AC       | 230 V                       |



|                                         |                     |
|-----------------------------------------|---------------------|
| Input frequency                         | 50 / 60 Hz          |
| Power max.                              | 6,17 W              |
| Power maintained                        | 4,6 W               |
| Power non-maintained                    | 0,35 W              |
| Ambient temperature maintained mode     | -5 °C to 35 °C      |
| Ambient temperature non-maintained mode | -5 °C to 35 °C      |
| Depth                                   | 86 mm               |
| Width                                   | 390 mm              |
| Height                                  | 99 mm               |
| Weight                                  | 0.79                |
| Weight incl. packaging                  | 0.89                |
| Connection cross-section                | 2.5 mm <sup>2</sup> |
| Switching input                         | Yes                 |
| Emergency light blocking                | Yes                 |
| Battery connection                      | Connector           |
| Dimming function                        | Yes                 |
| Luminous flux mains                     | 300 lm              |
| Luminous flux emergency                 | 230 lm              |
| EOF                                     | 0.77                |
| Customs tariff number                   | 94056120            |
| GTIN                                    | 4260659566357       |



## TECHNICAL DRAWING

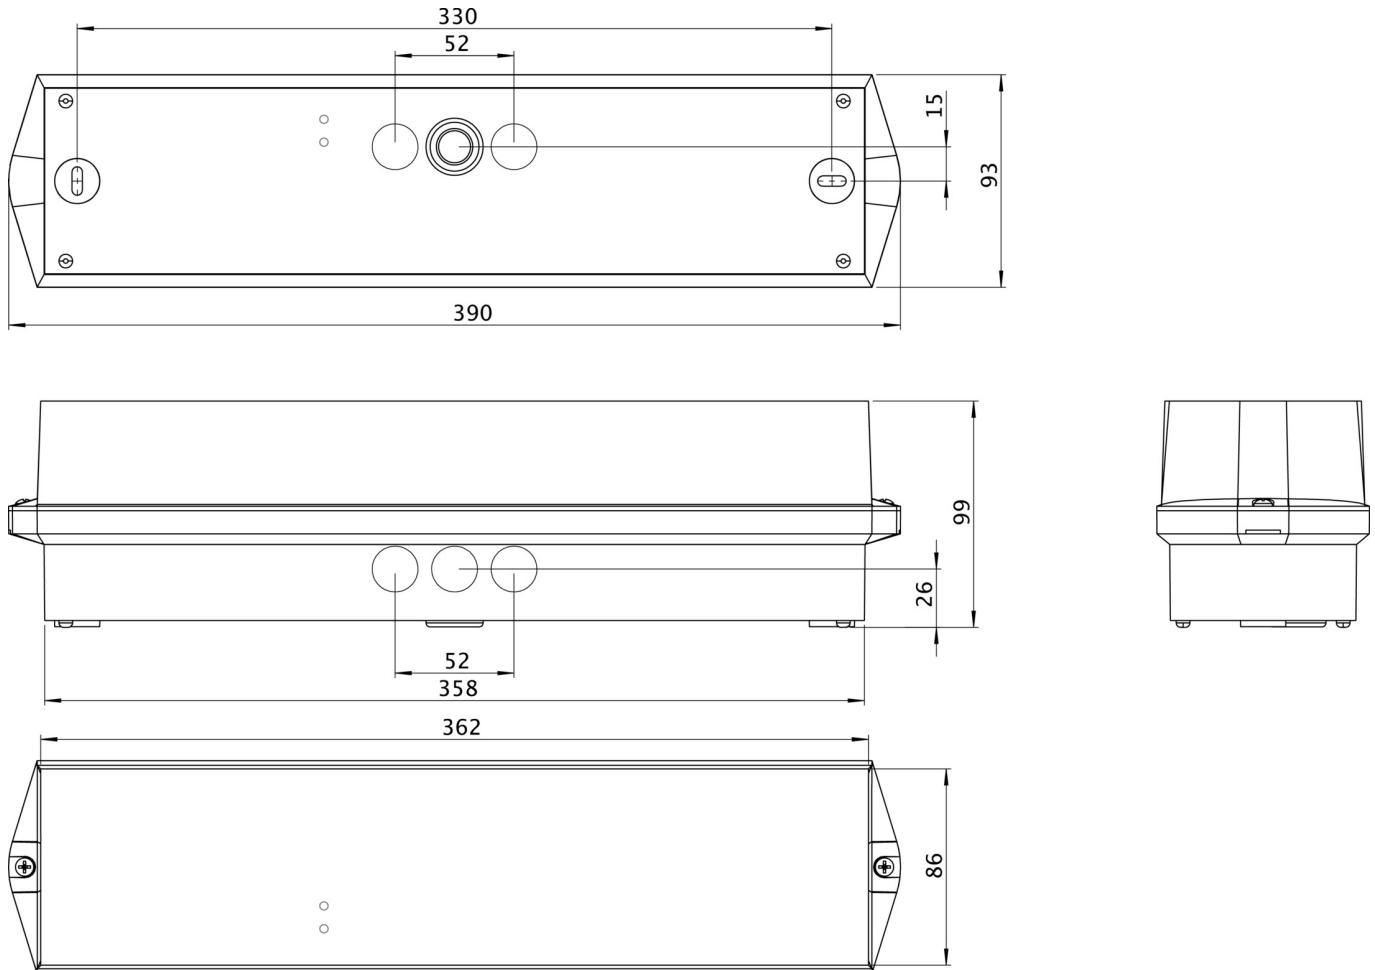

## ACCESSORY LIST

BKW - Robust steel protective grille for emergency lighting

KWIE - Installation frame

NIMHHT4820Q - Battery



## RELATED PRODUCTS

| Art.-No.           | Image | Monitoring                 | Supply         | Color    | Investment | Automatic log | Maintenance level | Remote maintenance | max. luminaires  | Single luminaire monitoring |
|--------------------|-------|----------------------------|----------------|----------|------------|---------------|-------------------|--------------------|------------------|-----------------------------|
| KWIW013SC-COOLIP54 |       | SelfControl (SC)           | Single battery | RAL 9003 | €          | no            | high              | no                 | unlimited        | itself                      |
| KWIW413WL          |       | Wireless Professional (WL) | self contained | RAL 9003 | €€         | yes           | low               | yes                | 1,000 per system | central                     |

As of: 24.07.2026 - Subject to technical changes and errors.