



Art.-Nr: QCW021SC-AZ-COOLIP54-BM
General light, Emergency light Self-contained
Universal, 1 h, IP54, Zinc die-cast, Anthracite, HF motion
detector

Round die-cast aluminum luminaire for general lighting and illumination of escape and rescue routes according to DIN EN 60598-1, DIN EN 60598-2-22 and DIN EN 1838.

Robust and timeless design, suitable for indoor and outdoor use. The emergency light LED can be unfolded tool-free during assembly e.g. for optimally illumination of the escape and rescue routes especially for wall mounting.

The COOL luminaire is equipped with an external battery housing for installation in the building. The installation of the lamp can be done outdoors or in cold stores.

Automatic monitoring of safety luminaire with SelfControl. The integrated motion detector (BM) reliably detects movements and automatically turns on the light in mains operation.



More information

www.rp-group.com/en/item/QCW021SC-AZ-COOLIP54-BM



TECHNICAL DATA

Luminaire type	General light, Emergency light
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Zinc die-cast
Housing color	Anthracite
Protection type (IP)	IP54
Impact resistance (IK)	10
Certification	WEEE, CE, D-Sign
Insulation class	1
Supply	Self-contained
Monitoring	SelfControl (SC)
Bridging time	1 h
Battery	NIMH 4,8 V/2,0 Ah
Operating mode	Non-maintained / maintained




Input voltage AC	230 V
Input frequency	50 / 60 Hz
Power max.	20 W
Power maintained	17,5 W
Power non-maintained	0,9 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Height	106 mm
Diameter	363 mm
Weight	2.69
Weight incl. packaging	3.02
Connection cross-section	2.5 mm ²
Switching input	Yes
Emergency light blocking	Yes
Battery connection	Connector
Dimming function	Yes
Luminous flux mains	1600 lm
Luminous flux emergency	470 lm
EOF	0.29
Customs tariff number	94056180
GTIN	4260682146366




TECHNICAL DRAWING

QCW

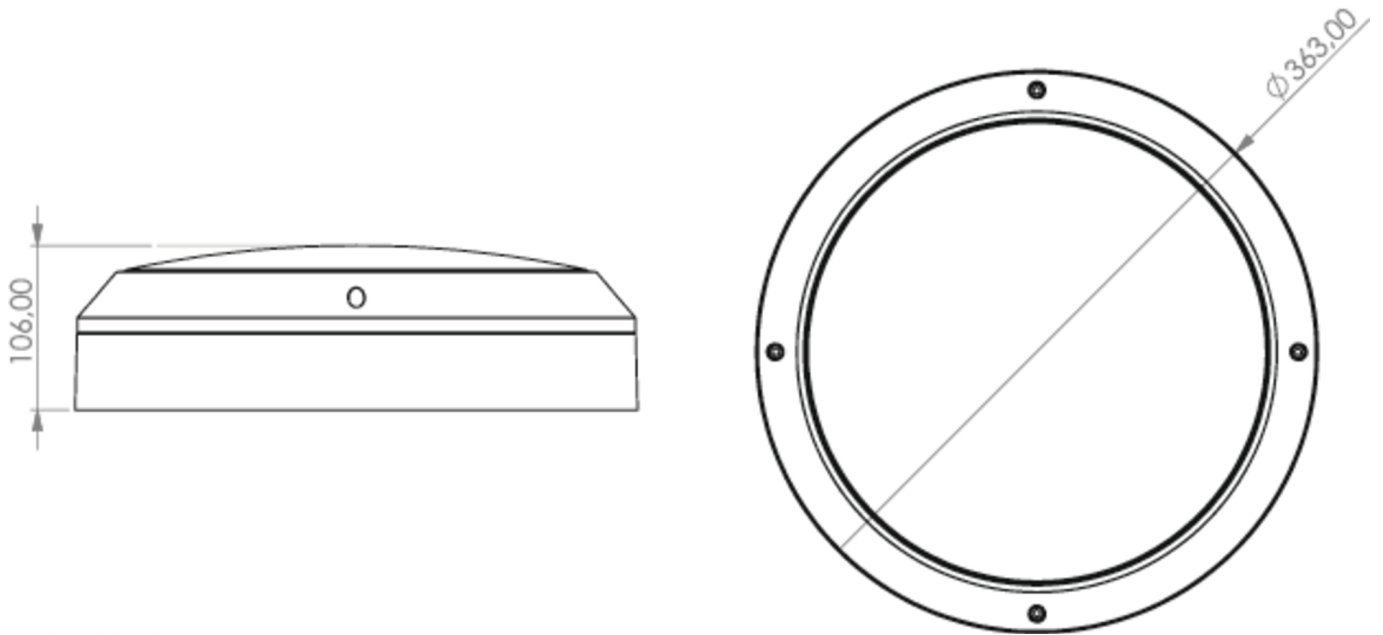

QCW

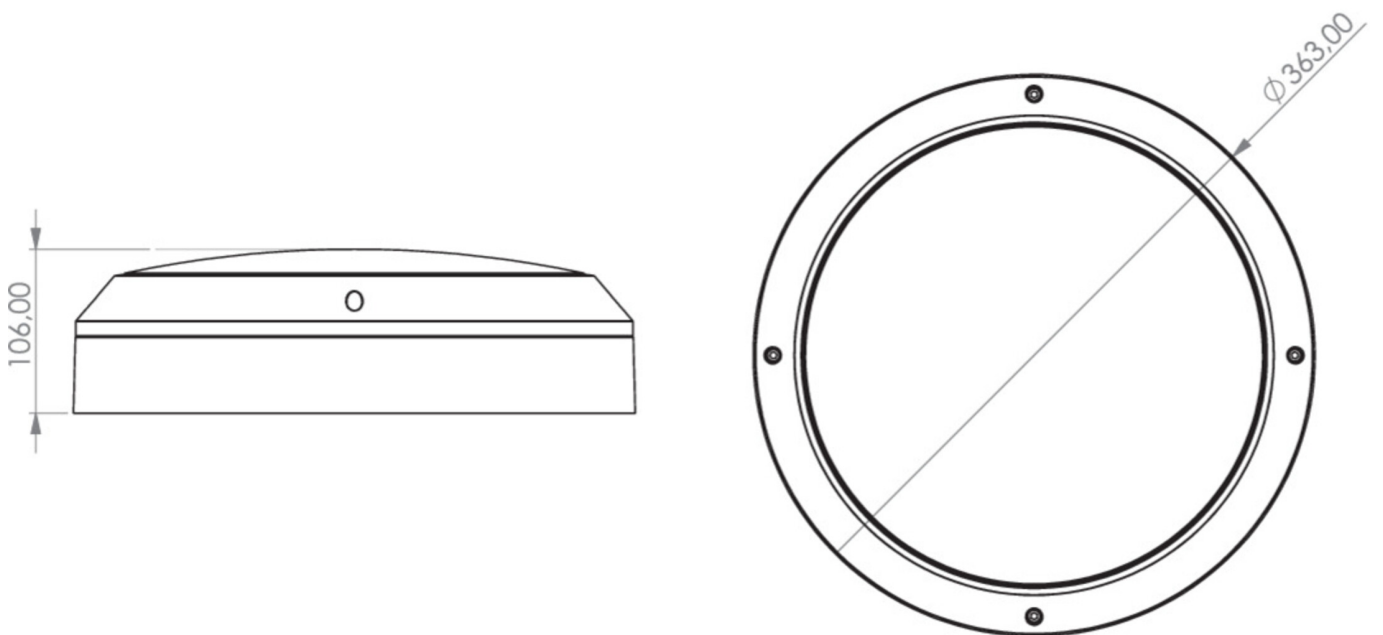



ACCESSORY LIST

NIMHHT4820Q - Battery

RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
QCW021SC-AZ		SelfControl (SC)	Single battery	RAL 7016	€	no	high	no	unlimited	itself
QCW021SC-AZ-COOLIP54		SelfControl (SC)	Single battery	RAL 7016	€	no	high	no	unlimited	itself
QCW021SC		SelfControl (SC)	Single battery	RAL 9003	€	no	high	no	unlimited	itself
QCW021SC-COOLIP54		SelfControl (SC)	Single battery	RAL 9003	€	no	high	no	unlimited	itself

As of: 24.07.2026 - Subject to technical changes and errors.