RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

Art.-Nr: WHGD019
Exit sign Centralised power supply systems Surface mounting, Without monitoring, CPS, 50m, IP65, Polycarbonate, White, printed pictograms



Modern emergency exit sign cube luminaire for identifying escape and emergency routes with easy-to-mount bayonet catch. It can be mounted straight onto the ceiling or suspended using the appropriate accessories.

The cube shape means that this plastic luminaire is easily recognisable from four sides. Ideal for use where routes intersect, e.g. in large stores with aisles.

Planning certainty is provided by printed pictograms, determined on the basis of logic. The pictograms used correspond to DIN ISO 7010 (arrow to the right, left and down).

CE

More information
www.rp-group.com/en/item/WHGD019

TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Surface mounting
Recognition distance	50m
Pictograph	Set
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	≥ 3
Certification	Waste disposal, CE
Insulation class	2
Supply	Centralised power supply systems
Monitoring	Without monitoring
Bridging time	CPS
Battery	/
Operating mode	Permanent circuit
Input voltage AC	230 V
Input frequency	50 / 60 Hz





RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

Input voltage DC	100-254 V
Power max.	4,6 W
Power maintained	4,6 W
Power non-maintained	0 W
Ambient temperature maintained mode	-20 °C to 40 °C
Ambient temperature non-maintained mode	-20 °C to 40 °C
Depth	500 mm
Width	522 mm
Height	280 mm
Weight	4.19
Weight incl. packaging	4.82
Connection cross-section	1.5 mm²
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	No
Luminous flux mains	520 lm
Luminous flux emergency	520 lm
Customs tariff number	94056180
GTIN	4260682146533

TECHNICAL DRAWING

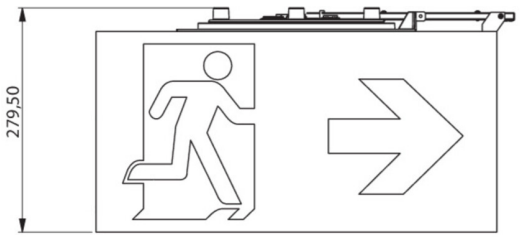

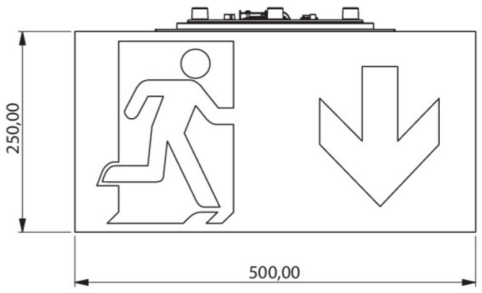

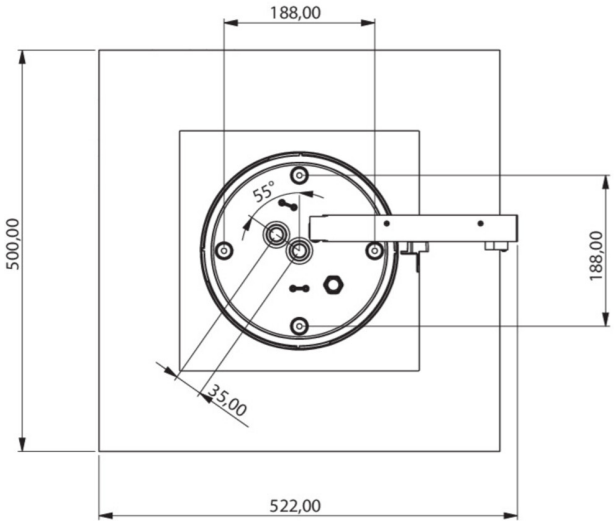

ACCESSORY LIST

DSA-Y4M - Wire suspension

DSA-Y4M-APA - Wire suspension

WKO - Set of chain eyelets for cube mounting (4 pieces)

As of: 13.11.2026 - Subject to technical changes and errors.