



**Art.-Nr: KCD013SC-IP64**  
**Exit sign Self-contained**  
**Surface mounting, SelfControl (SC), 3 h, 30 m, IP64,**  
**Polycarbonate, White**

Slim convex plastic emergency exit sign luminaire for ceiling mounting.

Emergency exit sign luminaire with plug-in set of pictograms fitted on the inside without the use of solvents is supplied as standard. In accordance with DIN EN 60598-1, DIN EN 60598-2-22 and DIN EN 1838.

Pre-assembled with eye bolts for suspension.

Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information

[www.rp-group.com/en/item/KCD013SC-IP64](http://www.rp-group.com/en/item/KCD013SC-IP64)



## TECHNICAL DATA




| Luminaire type         | Exit sign                   |
|------------------------|-----------------------------|
| Mounting               | Surface mounting            |
| Recognition distance   | 30 m                        |
| Pictograph             | Set                         |
| Illuminant             | LED                         |
| Housing material       | Polycarbonate               |
| Housing color          | White                       |
| Protection type (IP)   | IP64                        |
| Impact resistance (IK) | ≥ 3                         |
| Certification          | WEEE, CE, D-Sign            |
| Insulation class       | 1                           |
| Supply                 | Self-contained              |
| Monitoring             | SelfControl (SC)            |
| Bridging time          | 3 h                         |
| Battery                | NIMH 4,8 V/2,0 Ah           |
| Operating mode         | Non-maintained / maintained |
| Input voltage AC       | 230 V                       |



|                                         |                     |
|-----------------------------------------|---------------------|
| Input frequency                         | 50 / 60 Hz          |
| Power max.                              | 6,1 W               |
| Power maintained                        | 4,5 W               |
| Power non-maintained                    | 0,35 W              |
| Ambient temperature maintained mode     | -5 °C to 40 °C      |
| Ambient temperature non-maintained mode | -5 °C to 40 °C      |
| Depth                                   | 90 mm               |
| Width                                   | 340 mm              |
| Height                                  | 170 mm              |
| Weight                                  | 1.06                |
| Weight incl. packaging                  | 1.19                |
| Connection cross-section                | 2.5 mm <sup>2</sup> |
| Switching input                         | Yes                 |
| Emergency light blocking                | Yes                 |
| Battery connection                      | Connector           |
| Dimming function                        | Yes                 |
| Luminous flux mains                     | 220 lm              |
| Luminous flux emergency                 | 150 lm              |
| Customs tariff number                   | 94056120            |
| GTIN                                    | 4260682147820       |



## TECHNICAL DRAWING

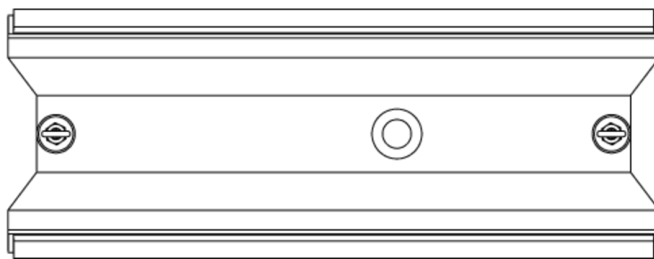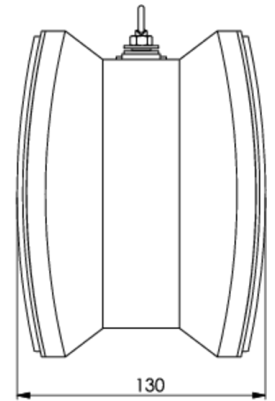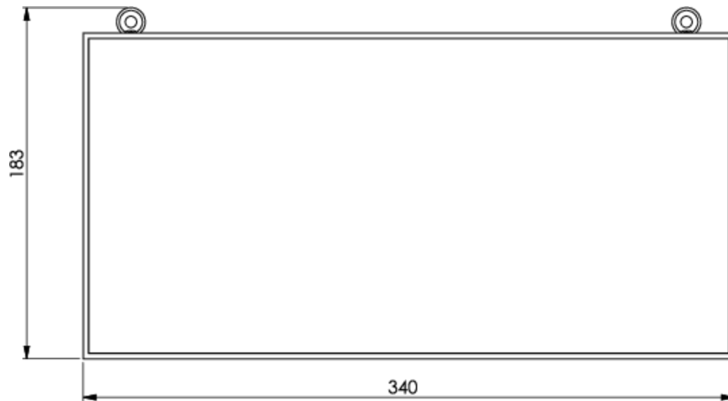

## ACCESSORY LIST

KCAWW - Wall bracket

DSA - Wire suspension



## RELATED PRODUCTS

| Art.-No.        | Image | Monitoring                 | Supply         | Color    | Investment | Automatic log | Maintenance level | Remote maintenance | max. luminaires  | Single luminaire monitoring |
|-----------------|-------|----------------------------|----------------|----------|------------|---------------|-------------------|--------------------|------------------|-----------------------------|
| KCD013-IP64     |       | Without monitoring         |                | RAL 9003 |            |               |                   |                    |                  |                             |
| KCD013WL-IP64   |       | Wireless Professional (WL) | Single battery | RAL 9003 | €€         | yes           | low               | yes                | 1,000 per system | central                     |
| KCD013WLSE-IP64 |       | Wireless Professional (WL) | Single battery | RAL 9003 | €€         | yes           | low               | yes                | 1,000 per system | central                     |

As of: 05.09.2025 - Subject to technical changes and errors.