
Art.-Nr: LBLT039ML
Emergency light Centralised power supply systems Track system, Central power supply (ML), CPS, IP20, Metal, White

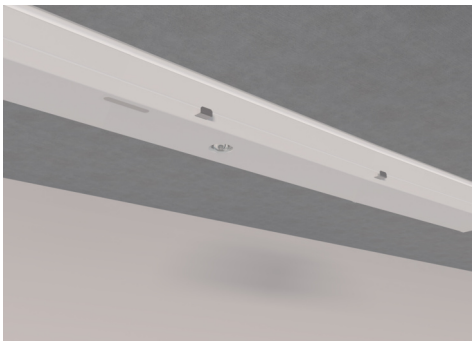

Escape Route Luminaire with ERT LED for Trilux E-Line Trunking System (Profile 07650, 7-core)
This escape route luminaire is specifically designed for the Trilux E-Line trunking system with a 7-core profile (07650). The integrated, innovative lens holder with quick-mounting functionality allows for easy and flexible use of different lens types – perfectly tailored to the specific application.

Each luminaire comes with both a round lens and a corridor lens included, enabling precise adaptation to various installation scenarios. Additional lenses, such as those for high-ceiling applications, are available separately.

Control and monitoring via central power supply system.

CE

More information
www.rp-group.com/en/item/LBLT039ML

TECHNICAL DATA


Luminaire type	Emergency light
Mounting	Track system
Pictograph	No
Illuminant	LED
Housing material	Metal
Housing color	White
Protection type (IP)	IP20
Impact resistance (IK)	≥ 3
Certification	Waste disposal, CE
Insulation class	1
Supply	Centralised power supply systems
Monitoring	Central power supply (ML)
Bridging time	CPS
Battery	/
Operating mode	single luminaire switching
Input voltage AC	230 V
Input frequency	50 / 60 Hz





RP GROUP
SOLUTIONS IN SAFETY + LIGHTING


Input voltage DC	216 V
Power max.	5,4 W
Power maintained	5,4 W
Power non-maintained	1,1 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	368 mm
Width	62 mm
Height	40.7 mm
Weight	0.37
Weight incl. packaging	0.52
Connection cross-section	2.5 mm²
Switching input	Yes
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Luminous flux mains	470 lm
Luminous flux emergency	470 lm
Customs tariff number	94056180
GTIN	4260682150448

TECHNICAL DRAWING

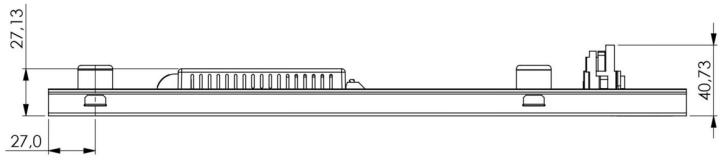



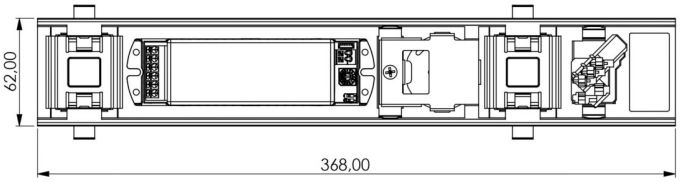

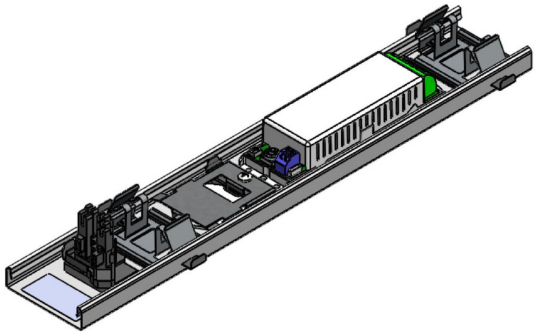

ACCESSORY LIST

LSYS-H4 - H-lens Special optics for emergency lighting in escape and rescue routes (installation height from 4 m)

LSYS-S4 - Precision spot lens for emergency lighting in large areas and high ceilings

LSYS-B4 - Precision beam lens for accent lighting of safety devices

As of: 04.11.2026 - Subject to technical changes and errors.