



**Art.-Nr: KMU019ML-SW**  
**Exit sign Centralised power supply systems**  
**Universal, CPS, 24 m, IP43, Polycarbonate, Black, Set of**  
**pictograms, Universal mounting**

Slim convex polycarbonate luminaire for universal mounting and for the marking of escape and rescue routes acc. to DIN EN 60598-1, DIN EN 60598-22 and DIN EN 1838 for single or double sided labeling. LED technology white High-Power SMD LED.

Housing color in black RAL 9005

Control and monitoring via central power supply system. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard. Universal mounting includes fitting on the wall and ceiling as well as the option of fitting in the ceiling in conjunction with the mounting frame available.



More information

[www.rp-group.com/en/item/KMU019ML-SW](http://www.rp-group.com/en/item/KMU019ML-SW)



## TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Universal
Recognition distance	24 m
Pictograph	Set
Illuminant	LED
Housing material	Polycarbonate
Housing color	Black
Protection type (IP)	IP43
Impact resistance (IK)	3
Certification	WEEE, CE
Insulation class	2
Supply	Centralised power supply systems
Monitoring	Central power supply (ML)
Bridging time	CPS
Battery	/
Operating mode	single luminaire switching



Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	216 V
Power max.	2,3 W
Power maintained	2,3 W
Power non-maintained	1 W
Ambient temperature maintained mode	-30 °C to 40 °C
Ambient temperature non-maintained mode	-30 °C to 40 °C
Depth	34 mm
Width	250 mm
Height	174 mm
Weight	0.37
Weight incl. packaging	0.47
Connection cross-section	1.5 mm <sup>2</sup>
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Luminous flux mains	220 lm
Luminous flux emergency	220 lm
Customs tariff number	94056120
GTIN	4260682151575



## TECHNICAL DRAWING

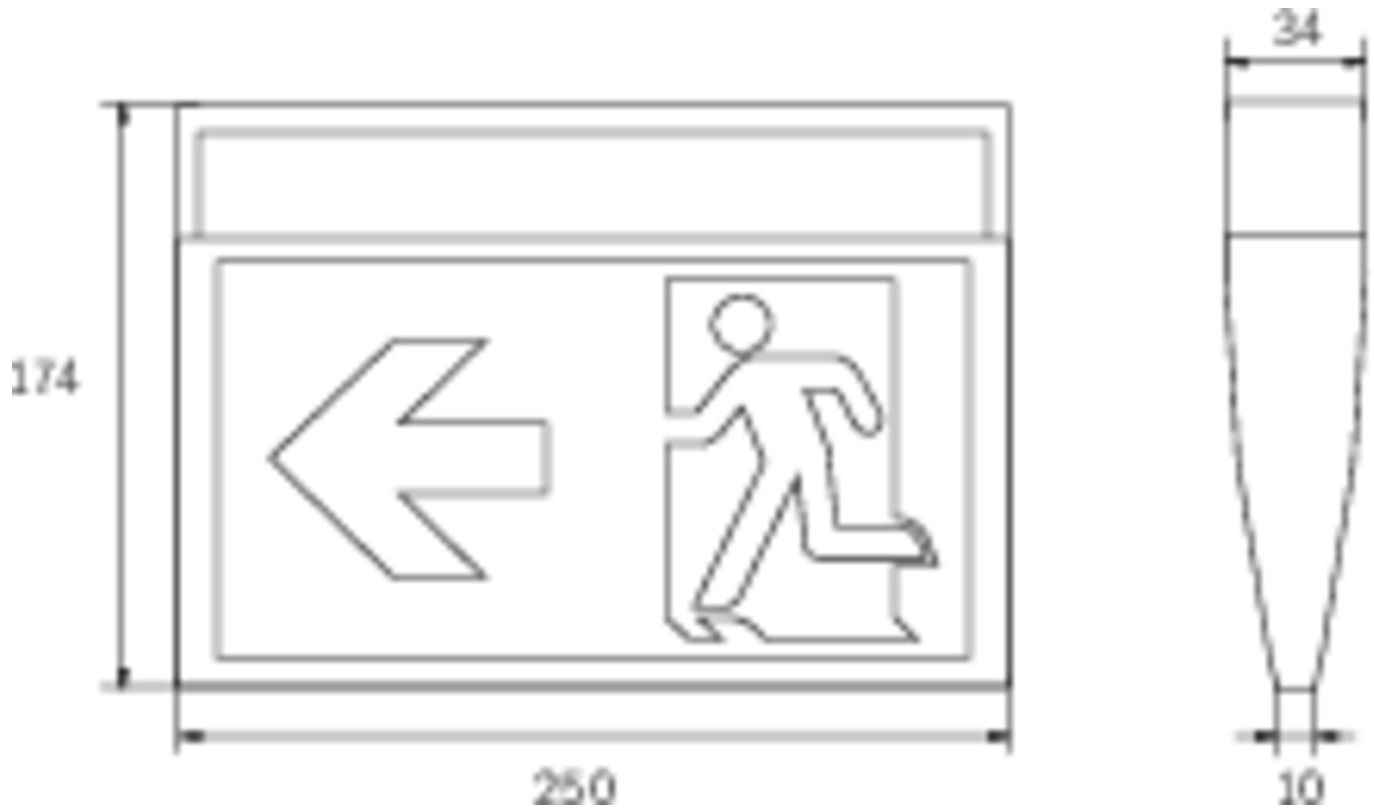

## ACCESSORY LIST

- DSA - Wire suspension
- 2PSW-EB - Pre-assembled pendant set for escape sign luminaires
- KME-SW - Mounting frame
- AWKSU - Wall bracket
- KMBE - Concrete-mounted box
- BALLPLX-KMU.01 -



## RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
KMU019ML		Central power supply (ML)	Central power supply	RAL 9003	€€€	Yes	low	Yes	1,920 per system	central
KMU519CC		CoreCompact 24 (CC)	Central power supply	RAL 9003	€€	Yes	low	Yes		central
KMU519CC-SW		CoreCompact 24 (CC)	Central power supply	RAL 9005	€€	Yes	low	Yes		central

As of: 04.07.2026 - Subject to technical changes and errors.