



**Art.-Nr: KMU011WL-3P**  
**Exit sign Self-contained**  
**Track system, 1 h, 24 m, IP43, Polycarbonate, White, Set of**  
**pictograms, Universal mounting**

Slim convex emergency exit sign luminaire with 3-phase adapter. Planning certainty for identifying escape and emergency routes for inscription on one or two sides is provided by tool-free variable use of the pictograms on site. The pictograms are inserted without the use of solvents. The set of pictograms (arrow to the right, left, up or down) is supplied as standard.

The pre-mounted 3-phase adapter allows for tool-free installation in popular 3-phase tracks, such as Nordic Aluminium GLOBAL pro (previously NOKIA) XTS, XTTS and XTSC.

Emergency exit sign luminaire in accordance with DIN EN 60598-1, DIN EN 60598-2-22 and DIN EN 1838.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard. Universal mounting includes fitting on the wall and ceiling as well as the option of fitting in the ceiling in conjunction with the mounting frame available.



More information  
[www.rp-group.com/en/item/KMU011WL-3P](http://www.rp-group.com/en/item/KMU011WL-3P)



## TECHNICAL DATA


|                        |                |
|------------------------|----------------|
| Luminaire type         | Exit sign      |
| Mounting               | Track system   |
| Recognition distance   | 24 m           |
| Pictograph             | Set            |
| Illuminant             | LED            |
| Housing material       | Polycarbonate  |
| Housing color          | White          |
| Protection type (IP)   | IP43           |
| Impact resistance (IK) | 3              |
| Certification          | WEEE, CE       |
| Insulation class       | 2              |
| Supply                 | Self-contained |



|                                         |                             |
|-----------------------------------------|-----------------------------|
| Monitoring                              | Wireless Professional (WL)  |
| Bridging time                           | 1 h                         |
| Battery                                 | LiFePO4 3,2 V/3,3 Ah        |
| Operating mode                          | Non-maintained / maintained |
| Input voltage AC                        | 230 V                       |
| Input frequency                         | 50 / 60 Hz                  |
| Input voltage DC                        | - V                         |
| Power max.                              | 5,3 W                       |
| Power maintained                        | 3,9 W                       |
| Power non-maintained                    | 1,5 W                       |
| Ambient temperature maintained mode     | -5 °C to 40 °C              |
| Ambient temperature non-maintained mode | -5 °C to 40 °C              |
| Depth                                   | 34 mm                       |
| Width                                   | 250 mm                      |
| Height                                  | 174 mm                      |
| Weight                                  | 0.45                        |
| Weight incl. packaging                  | 0.62                        |
| Connection cross-section                | 2.5 mm <sup>2</sup>         |
| Switching input                         | Yes                         |
| Emergency light blocking                | No                          |
| Battery connection                      | Connector                   |
| Dimming function                        | No                          |
| Luminous flux mains                     | 190 lm                      |
| Luminous flux emergency                 | 190 lm                      |
| Customs tariff number                   | 94056120                    |
| GTIN                                    | 4260682152220               |



## TECHNICAL DRAWING

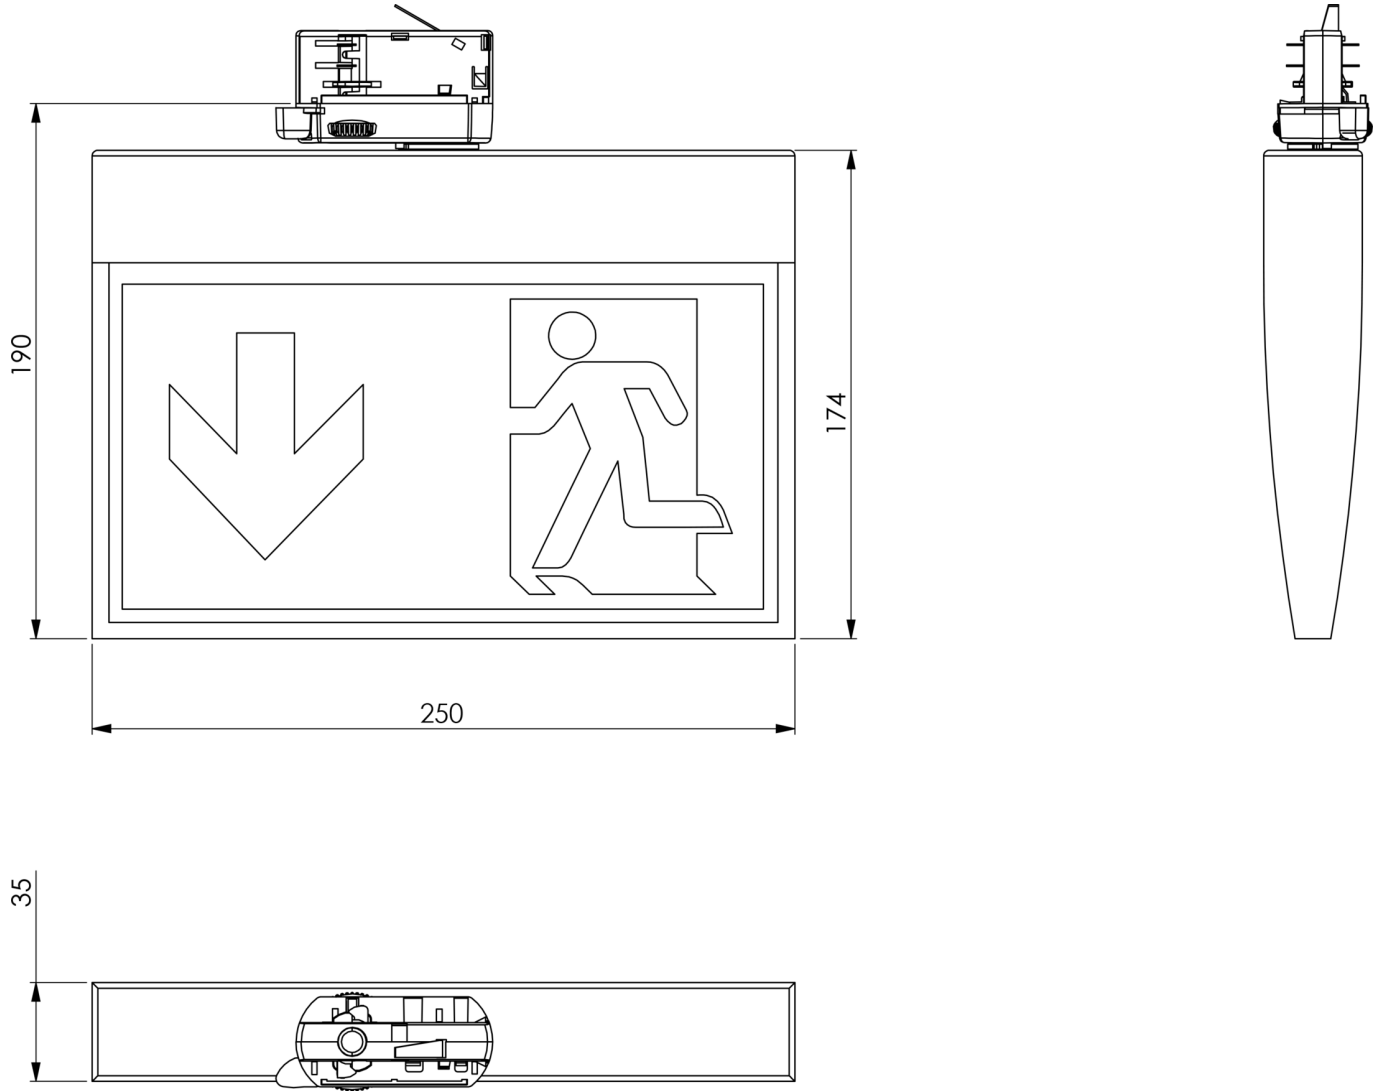

## ACCESSORY LIST

LFP3233.01 - Battery



## RELATED PRODUCTS

| Art.-No.       | Image | Monitoring                 | Supply         | Color    | Investment | Automatic log | Maintenance level | Remote maintenance | max. luminaires  | Single luminaire monitoring |
|----------------|-------|----------------------------|----------------|----------|------------|---------------|-------------------|--------------------|------------------|-----------------------------|
| KMU001SC-3P    |       | SelfControl (SC)           | Single battery | RAL 9003 | €          | no            | high              | no                 | unlimited        | itself                      |
| KMU001SC-SW-3P |       | SelfControl (SC)           | Single battery | RAL 9005 | €          | no            | high              | no                 | unlimited        | itself                      |
| KMU001WL-3P    |       | Wireless Professional (WL) | self contained | RAL 9003 | €€         | yes           | low               | yes                | 1,000 per system | central                     |
| KMU001WL-SW-3P |       | Wireless Professional (WL) | self contained | RAL 9005 | €€         | yes           | low               | yes                | 1,000 per system | central                     |
| KMU011SC-3P    |       | SelfControl (SC)           | Single battery | RAL 9003 | €          | no            | high              | no                 | unlimited        | itself                      |
| KMU011SC-SW-3P |       | SelfControl (SC)           | Single battery | RAL 9005 | €          | no            | high              | no                 | unlimited        | itself                      |
| KMU011WL-SW-3P |       | Wireless Professional (WL) | self contained | RAL 9005 | €€         | yes           | low               | yes                | 1,000 per system | central                     |

As of: 04.09.2026 - Subject to technical changes and errors.