



**Art.-Nr: KMUK403SC**  
**Exit sign Self-contained**  
**Universal, 3 h, 24 m, IP43, Polycarbonate, White, Set of**  
**pictograms, Universal mounting**

Slim convex escape sign light with clear closed hood. The universal mounting includes wall and ceiling surface mounting, as well as the possibility of recessed ceiling installation in conjunction with the mounting frame. Planning safety for marking the escape and rescue routes for one- or two-sided lettering is ensured by the tool-free, variable use of the pictograms on site. The pictograms are internal and are inserted solvent-free. The pictogram set (right, left, top and bottom arrow) is included as standard.

Exit sign according to EN 60598-1, EN 605982-22 and EN 1838.

Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard. Universal mounting includes fitting on the wall and ceiling as well as the option of fitting in the ceiling in conjunction with the mounting frame available.



More information  
[www.rp-group.com/en/item/KMUK403SC](http://www.rp-group.com/en/item/KMUK403SC)



## TECHNICAL DATA


|                        |                            |
|------------------------|----------------------------|
| Luminaire type         | Exit sign                  |
| Mounting               | Universal                  |
| Recognition distance   | 24 m                       |
| Pictograph             | Set                        |
| Illuminant             | LED                        |
| Housing material       | Polycarbonate              |
| Housing color          | White                      |
| Protection type (IP)   | IP43                       |
| Impact resistance (IK) | 3                          |
| Certification          | WEEE, CE, 5 years warranty |
| Insulation class       | 2                          |
| Supply                 | Self-contained             |
| Monitoring             | SelfControl (SC)           |
| Bridging time          | 3 h                        |



|                                         |                             |
|-----------------------------------------|-----------------------------|
| Battery                                 | LiFePO4 3,2 V/1,5 Ah        |
| Operating mode                          | Non-maintained / maintained |
| Input voltage AC                        | 230 V                       |
| Input frequency                         | 50 / 60 Hz                  |
| Power max.                              | 3,7 W                       |
| Power maintained                        | 3,2 W                       |
| Power non-maintained                    | 0,3 W                       |
| Ambient temperature maintained mode     | 0 °C to 40 °C               |
| Ambient temperature non-maintained mode | 0 °C to 40 °C               |
| Depth                                   | 35 mm                       |
| Width                                   | 251 mm                      |
| Height                                  | 177 mm                      |
| Weight                                  | 0.55                        |
| Weight incl. packaging                  | 0.65                        |
| Connection cross-section                | 1.5 mm <sup>2</sup>         |
| Switching input                         | Yes                         |
| Emergency light blocking                | No                          |
| Battery connection                      | Connector                   |
| Dimming function                        | No                          |
| Customs tariff number                   | 94056120                    |
| GTIN                                    | 4260682152473               |



## TECHNICAL DRAWING

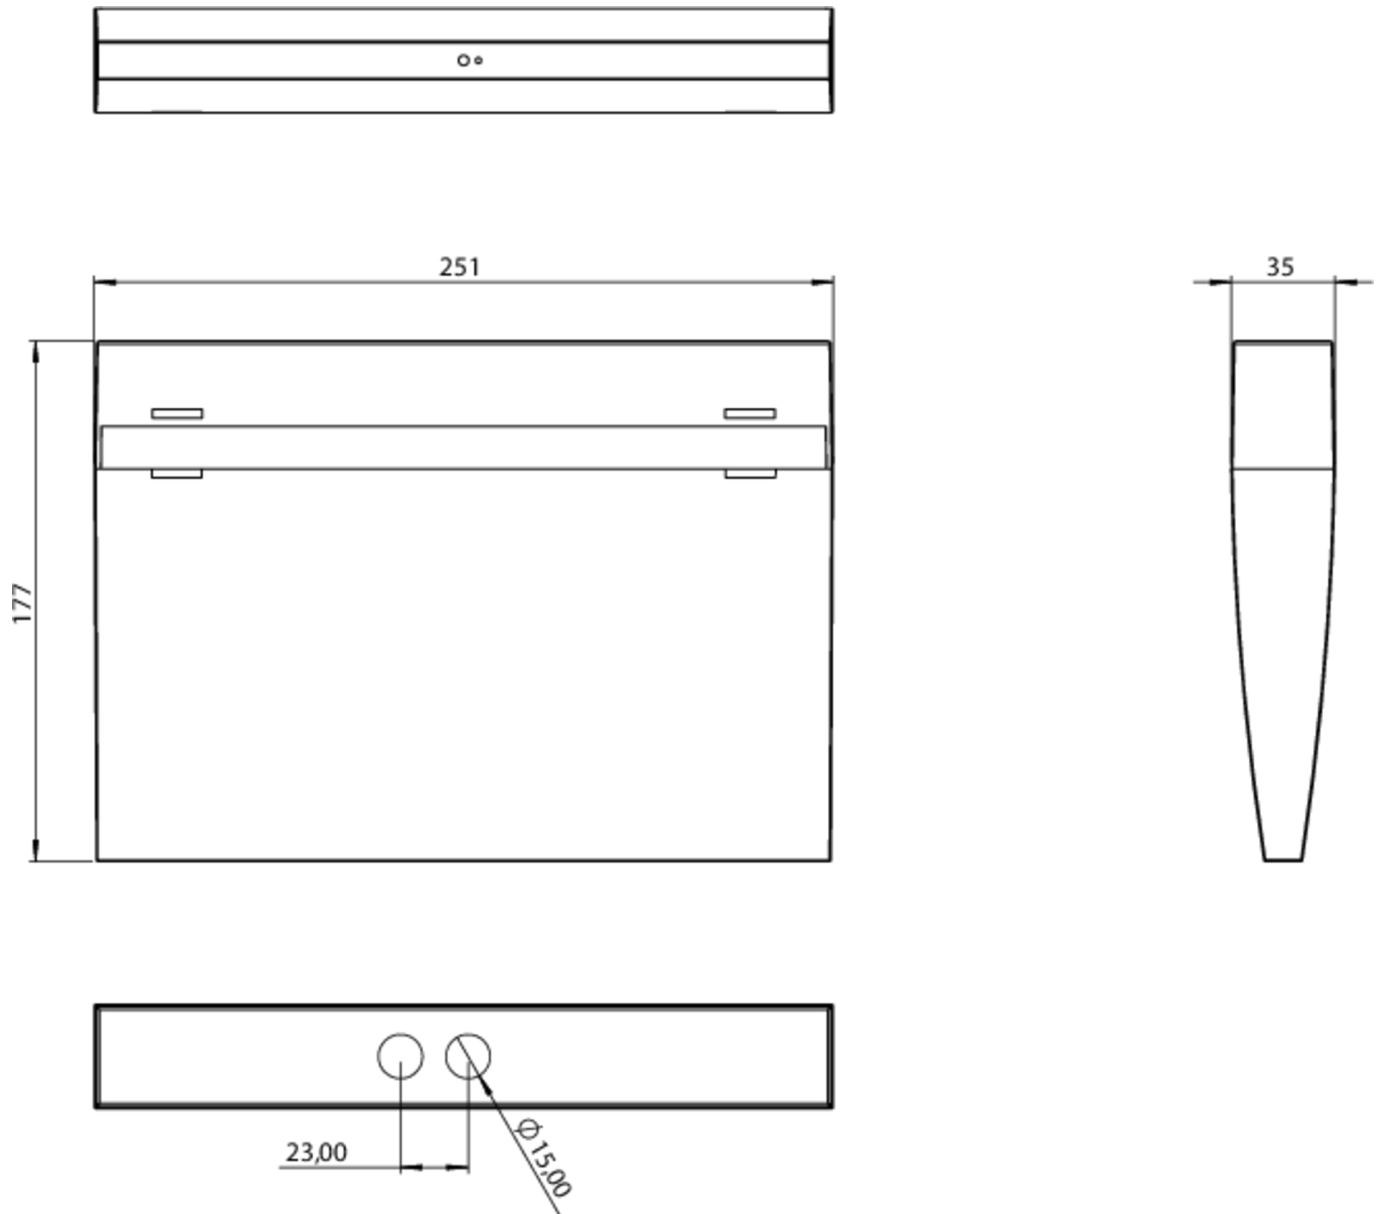

## ACCESSORY LIST

- DSA - Wire suspension
- AWKSU - Wall bracket
- 2PW-EB - Pendant
- BALLPLX-KMU.01 -
- KME - Mounting frame



## RELATED PRODUCTS

| Art.-No.     | Image | Monitoring       | Supply         | Color    | Investment | Automatic log | Maintenance level | Remote maintenance | max. luminaires | Single luminaire monitoring |
|--------------|-------|------------------|----------------|----------|------------|---------------|-------------------|--------------------|-----------------|-----------------------------|
| KMUK403SC-SW |       | SelfControl (SC) | Single battery | RAL 9005 | €          | no            | high              | no                 | unlimited       | itself                      |

As of: 27.08.2026 - Subject to technical changes and errors.