## Art.-Nr: AGDC401WL-E
## Exit sign Self-contained
## Rope ceiling structure, Wireless Professional (WL), 1 h, 50m, IP40, Zinc die-cast, Stainless steel, Piktogram as reqired



Modern zinc die-cast emergency exit sign luminaire with wire suspension for surface mounting on the ceiling. Escape and emergency routes can be identified on either one or two sides.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. Two requested pictograms (arrow to the right, left, up, down or white) are supplied as standard.

More information
www.rp-group.com/en/item/AGDC401WL-E

## TECHNICAL DATA


| | |
|---|---|
| Luminaire type | Exit sign |
| Mounting | Rope ceiling structure |
| Recognition distance | 50m |
| Pictograph | acc. to Specification |
| Illuminant | LED |
| Housing material | Zinc die-cast |
| Housing color | Stainless steel |
| Protection type (IP) | IP40 |
| Impact resistance (IK) | ≥ 3 |
| Certification | Waste disposal, CE, 5 Years waranty |
| Insulation class | 2 |
| Supply | Self-contained |
| Monitoring | Wireless Professional (WL) |
| Bridging time | 1 h |
| Battery | LiFePO4 3,2 V/1,2 Ah |
| Operating mode | Non-maintained / maintained |
| Input voltage AC | 230 V |



RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

| | |
|---|---|
| Input frequency | 50 Hz |
| Power max. | 7 W |
| Power maintained | 5,6 W |
| Power non-maintained | 0,8 W |
| Ambient temperature maintained mode | -5 °C to 40 °C |
| Ambient temperature non-maintained mode | -5 °C to 40 °C |
| Depth | 80 mm |
| Width | 512 mm |
| Height | 338 mm |
| Weight | 2.71 |
| Weight incl. packaging | 3.36 |
| Connection cross-section | 2.5 mm² |
| Switching input | Yes |
| Emergency light blocking | Yes |
| Battery connection | Connector |
| Dimming function | Yes |
| Luminous flux mains | 450 lm |
| Luminous flux emergency | 450 lm |
| Customs tariff number | 94056180 |
| GTIN | 4260682155283 |

## TECHNICAL DRAWING

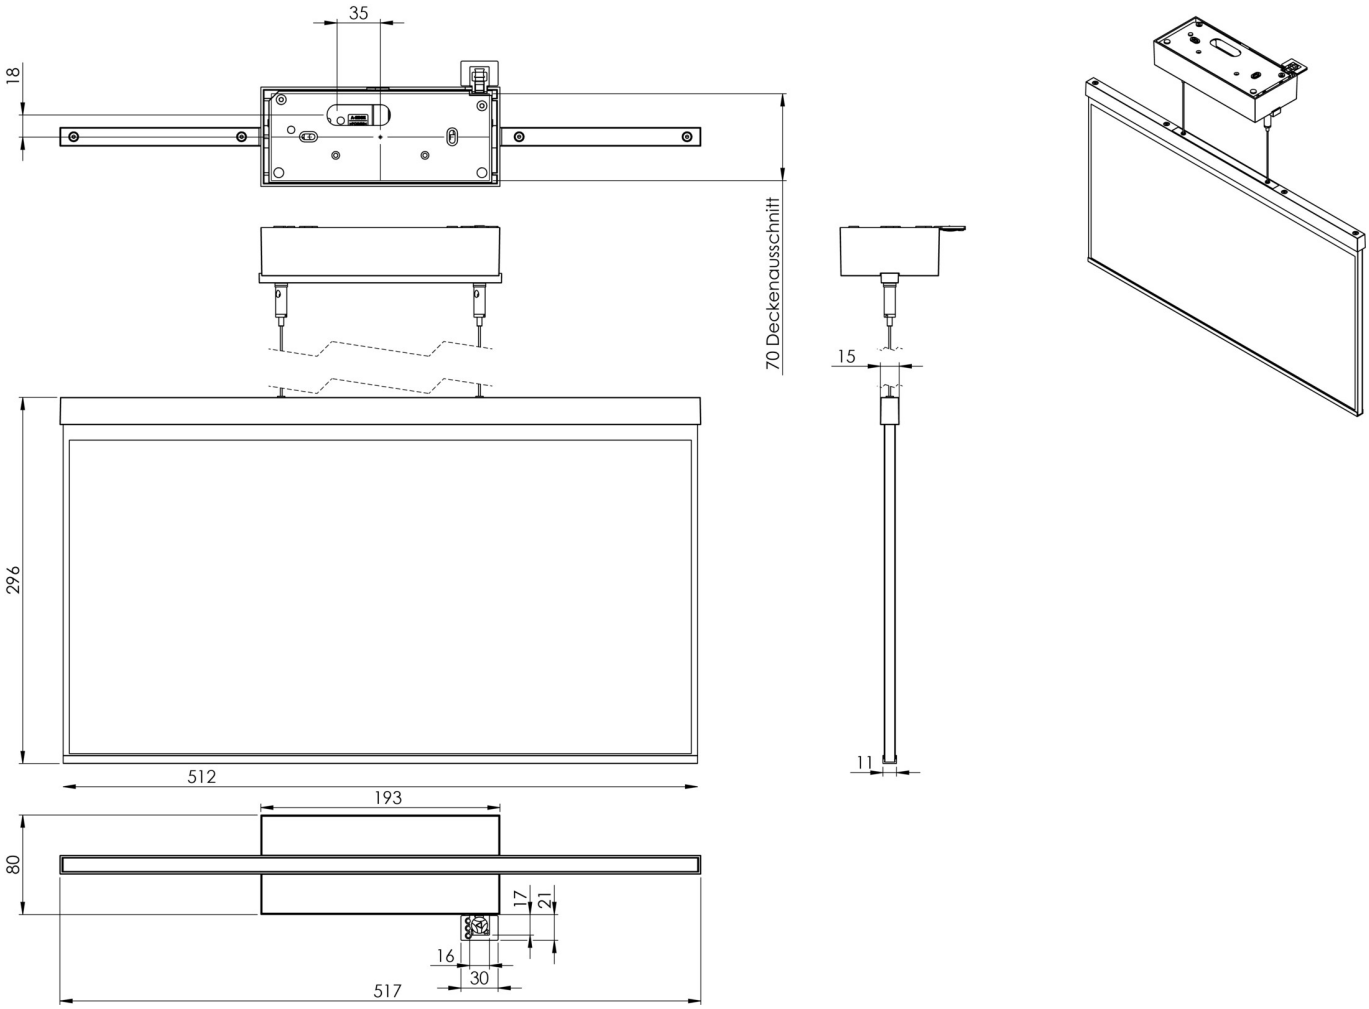


As of: 02.11.2026 - Subject to technical changes and errors.