RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

Art.-Nr: KWIW519CC
Exit sign, Emergency light Centralised power supply systems Wall mounting, CoreCompact 24 (CC), CPS, 16 m, IP65, Polycarbonate, White, Set of pictograms



Classic, robust, plastic, beam-like emergency exit sign luminaire with a high level of protection and self-adhesive pictogram for versatile use.

Intended for wall mounting when used as an emergency exit sign luminaire. Without the use of pictograms, it can be used as a safety luminaire, preferably for ceiling mounting.

Control and monitoring via central 24 V low-power system. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.

CE

More information
www.rp-group.com/en/item/KWIW519CC

TECHNICAL DATA


Luminaire type	Exit sign, Emergency light
Mounting	Wall mounting
Recognition distance	16 m
Pictograph	Set
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	Waste disposal, CE
Insulation class	3
Supply	Centralised power supply systems
Monitoring	CoreCompact 24 (CC)
Bridging time	CPS
Battery	/
Operating mode	Non-maintained / maintained
Input voltage AC	24 V



RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

Power max.	4,2 W
Power maintained	4,2 W
Power non-maintained	0,4 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	86 mm
Width	390 mm
Height	99 mm
Weight	0.67
Weight incl. packaging	0.77
Connection cross-section	2.5 mm²
Switching input	No
Emergency light blocking	No
Battery connection	No
Luminous flux mains	335 lm
Luminous flux emergency	335 lm
EOF	1
Customs tariff number	94056120
GTIN	4260682157478

TECHNICAL DRAWING

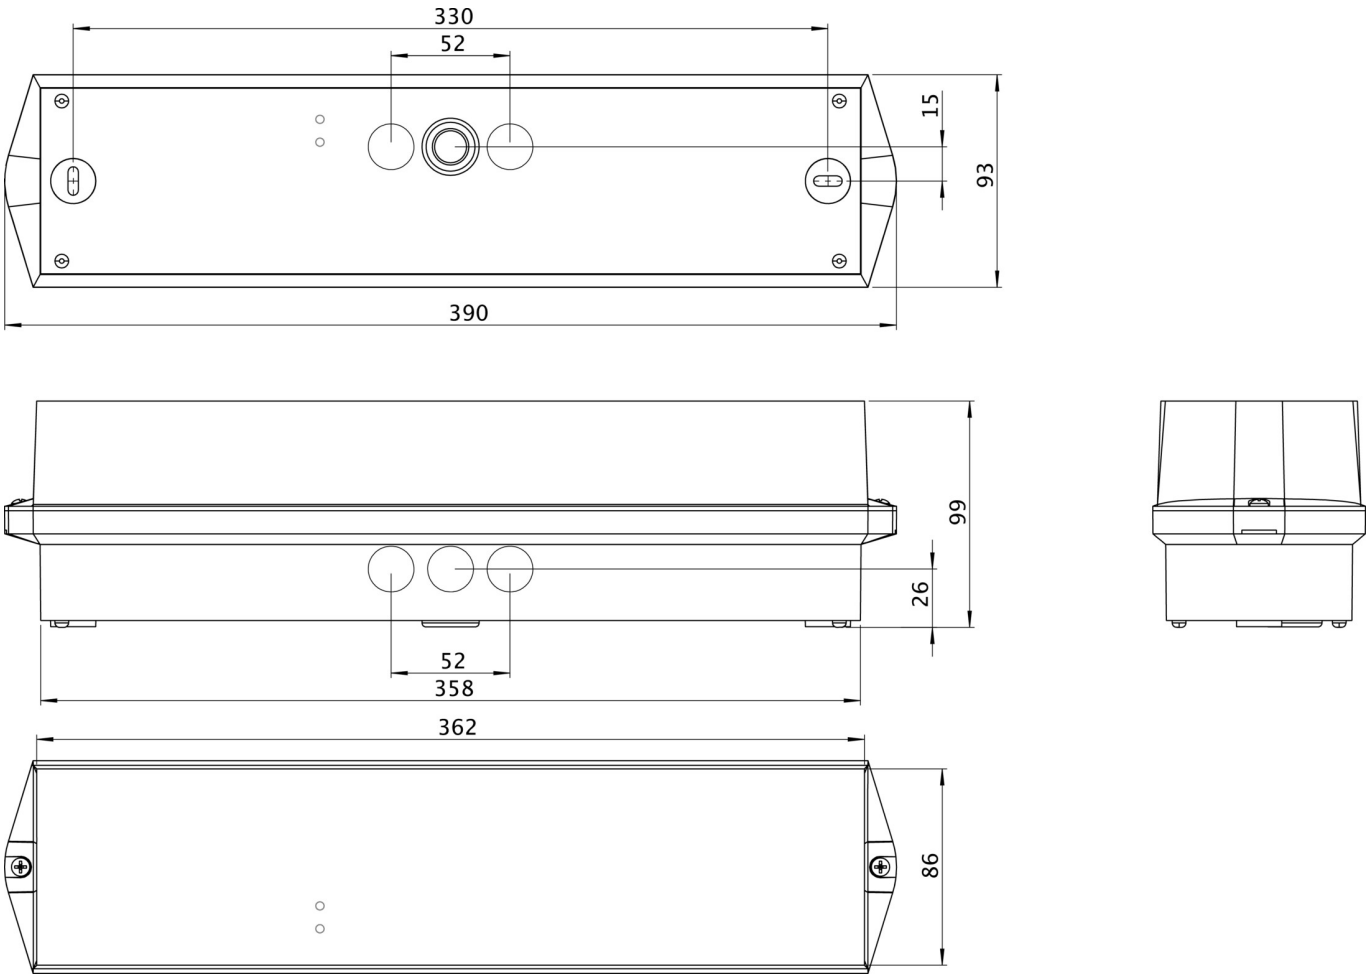

ACCESSORY LIST

BKW - Robust steel protective grille for emergency lighting

KWIE - Installation frame

RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
KWIW019ML		Central power supply (ML)	Central power supply	RAL 9003	€€€	Yes	low	Yes	1,920 per system	central

As of: 15.11.2026 - Subject to technical changes and errors.