RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

Art.-Nr: WHXD519CC
Exit sign Centralised power supply systems Surface mounting, CoreCompact 24 (CC), CPS, 30 m, IP65, Polycarbonate, White, printed pictograms



Modern emergency exit sign cube luminaire for identifying escape and emergency routes with easy-to-mount bayonet catch. It can be mounted straight onto the ceiling or suspended using the appropriate accessories.

The cube shape means that this plastic luminaire is easily recognisable from four sides. Ideal for use where routes intersect, e.g. in large stores with aisles.

Control and monitoring via central 24 V low-power system. Planning certainty is provided by printed pictograms, determined on the basis of logic. The pictograms used correspond to DIN ISO 7010 (arrow to the right, left and down).

CE D


More information
www.rp-group.com/en/item/WHXD519CC


TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Surface mounting
Recognition distance	30 m
Pictograph	Set
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	4
Certification	Waste disposal, CE, D-sign
Insulation class	3
Supply	Centralised power supply systems
Monitoring	CoreCompact 24 (CC)
Bridging time	CPS
Battery	/
Operating mode	Non-maintained / maintained
Input voltage AC	24 V
Power max.	5,1 W

Power maintained	5,1 W
Power non-maintained	0,4 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	300 mm
Width	300 mm
Height	179.5 mm
Weight	1.62
Weight incl. packaging	1.85
Connection cross-section	2.5 mm²
Switching input	No
Emergency light blocking	No
Battery connection	No
Luminous flux mains	520 lm
Luminous flux emergency	520 lm
Customs tariff number	94056120
GTIN	4260682157690

TECHNICAL DRAWING

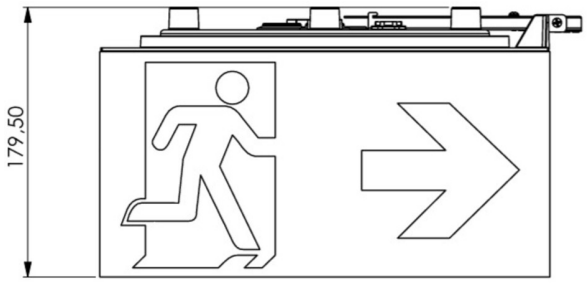

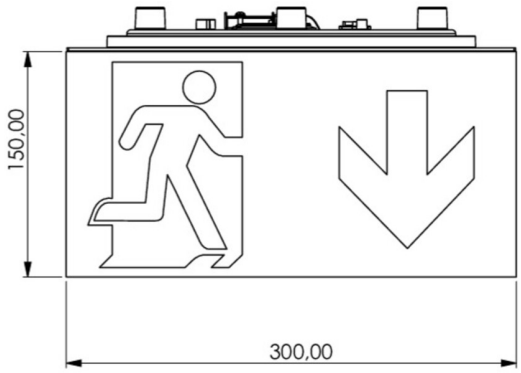

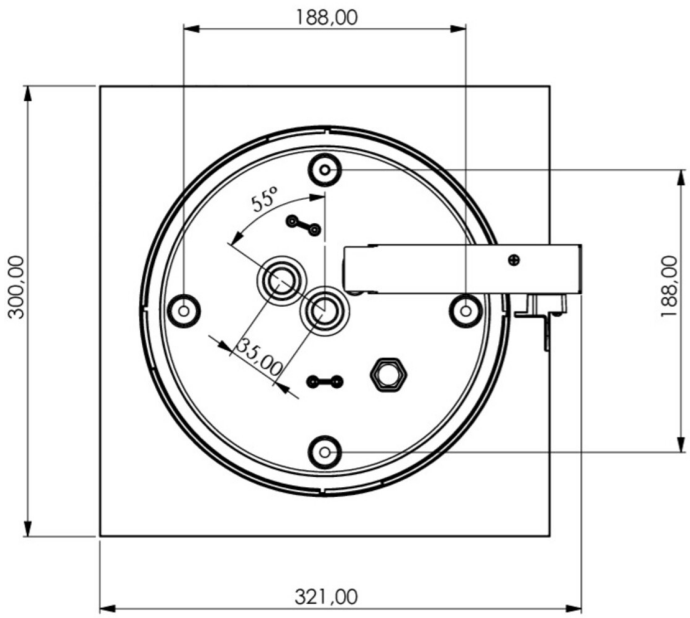

ACCESSORY LIST

WKO - Set of chain eyelets for cube mounting (4 pieces)

DSA-Y4M - Wire suspension

DSA-Y4M-APA - Wire suspension

As of: 13.11.2026 - Subject to technical changes and errors.