



Art.-Nr: WFXW519CC
Exit sign Centralised power supply systems
Wall mounting, CPS, 30 m, IP65, Polycarbonate, White,
Piktogram as required

Modern exit sign wall luminaire in a square format.

For marking escape and rescue routes. Optionally, the light can be used to mark other adjacent rooms, such as showers, restrooms, or changing rooms.

The easy-to-install bayonet lock allows for safe opening and closing of the light. It also ensures a high protection rating, making the light versatile and flexible.

Control and monitoring via central 24 V low-power system. The requested pictogram (arrow to the right, left, up or down) is supplied as standard.



More information
www.rp-group.com/en/item/WFXW519CC



TECHNICAL DATA




Luminaire type	Exit sign
Mounting	Wall mounting
Recognition distance	30 m
Pictograph	acc. to Specification
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	4
Certification	WEEE, CE, D-Sign
Insulation class	3
Supply	Centralised power supply systems
Monitoring	CoreCompact 24 (CC)
Bridging time	CPS
Battery	/
Operating mode	Non-maintained / maintained
Input voltage AC	24 V
Power max.	5,1 W






Power maintained	5,1 W
Power non-maintained	0,4 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	300 mm
Width	300 mm
Height	110 mm
Weight	1.3
Weight incl. packaging	1.55
Connection cross-section	2.5 mm ²
Switching input	No
Emergency light blocking	No
Battery connection	No
Luminous flux mains	520 lm
Luminous flux emergency	520 lm
Customs tariff number	94056180
GTIN	4260682157706



TECHNICAL DRAWING

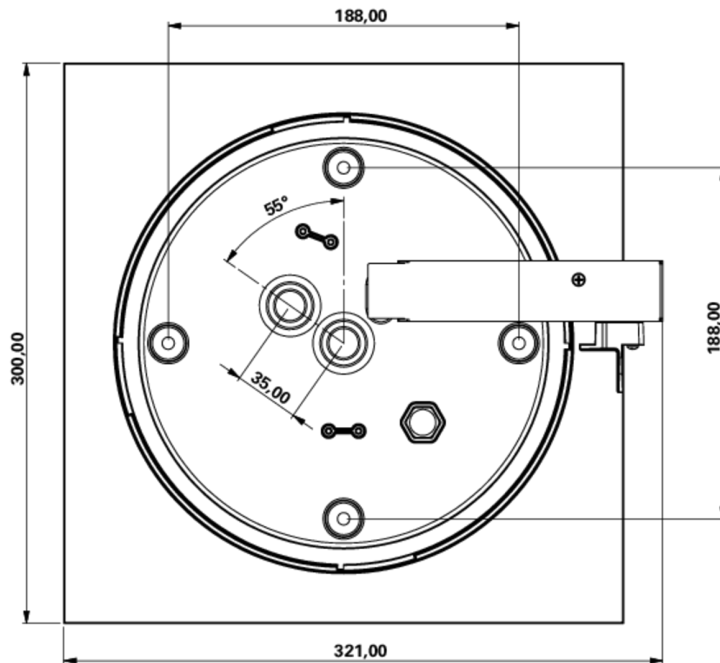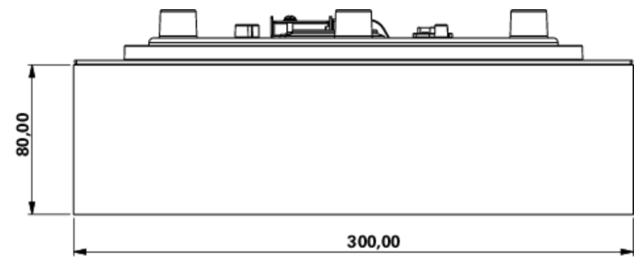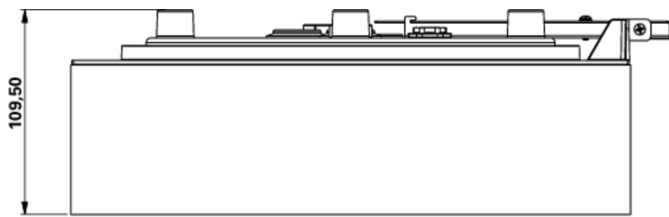

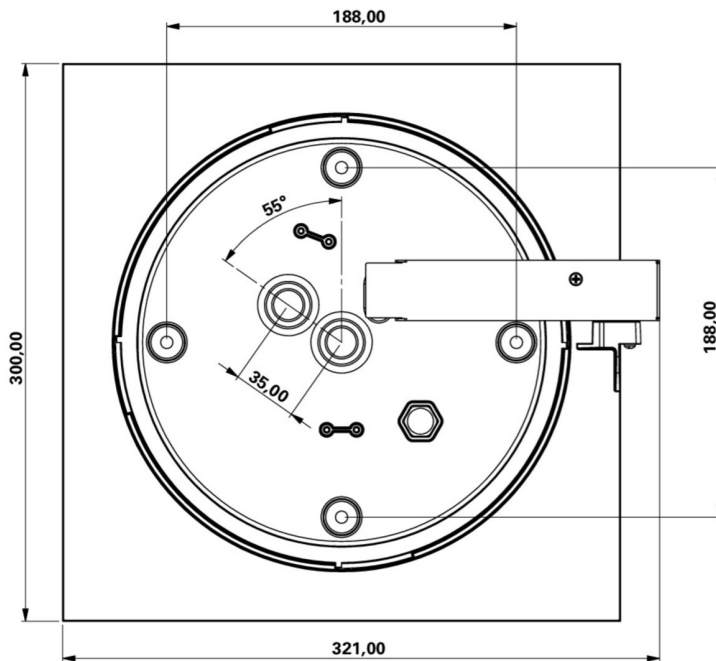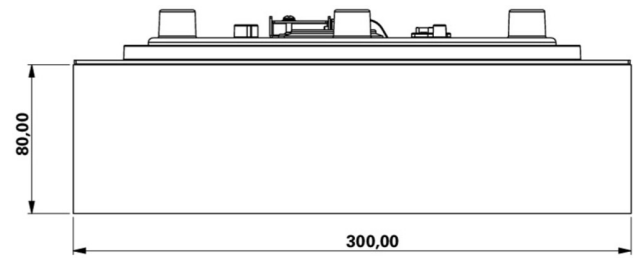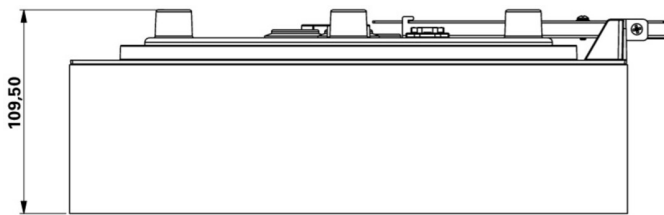

As of: 24.08.2026 - Subject to technical changes and errors.