



**Art.-Nr: PFW519CC**

**Exit sign Centralised power supply systems**

**Wall mounting, CPS, 24 m, IP65, Polycarbonate, White, Set of pictograms, Flexiklick**

Robust plastic emergency exit sign or safety luminaire.

Use as an emergency exit sign luminaire for wall mounting.

Or without the use of pictograms as a safety luminaire with the prismatic cover included, preferably for ceiling mounting.

Control and monitoring via central 24 V low-power system. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left and down) is supplied as standard. The luminaire is fitted with the innovative flexible plug-in system for rapid use of the right lens. The corridor lens is supplied with every luminaire. A round lens, spotlight lens and beam lens are available as options.



More information

[www.rp-group.com/en/item/PFW519CC](http://www.rp-group.com/en/item/PFW519CC)



## TECHNICAL DATA


|                        |                                  |
|------------------------|----------------------------------|
| Luminaire type         | Exit sign                        |
| Mounting               | Wall mounting                    |
| Recognition distance   | 24 m                             |
| Pictograph             | Set                              |
| Illuminant             | LED                              |
| Housing material       | Polycarbonate                    |
| Housing color          | White                            |
| Protection type (IP)   | IP65                             |
| Impact resistance (IK) | 5                                |
| Certification          | WEEE, CE, D-Sign                 |
| Insulation class       | 3                                |
| Supply                 | Centralised power supply systems |
| Monitoring             | CoreCompact 24 (CC)              |
| Bridging time          | CPS                              |
| Battery                | /                                |
| Operating mode         | Non-maintained / maintained      |



|                                         |                     |
|-----------------------------------------|---------------------|
| Input voltage AC                        | 24 V                |
| Power max.                              | 4,2 W               |
| Power maintained                        | 4,2 W               |
| Power non-maintained                    | 0,4 W               |
| Ambient temperature maintained mode     | -5 °C to 40 °C      |
| Ambient temperature non-maintained mode | -5 °C to 40 °C      |
| Depth                                   | 370 mm              |
| Width                                   | 105 mm              |
| Height                                  | 152 mm              |
| Weight                                  | 0.87                |
| Weight incl. packaging                  | 1                   |
| Connection cross-section                | 2.5 mm <sup>2</sup> |
| Switching input                         | No                  |
| Emergency light blocking                | No                  |
| Battery connection                      | No                  |
| Luminous flux mains                     | 335 lm              |
| Luminous flux emergency                 | 335 lm              |
| Customs tariff number                   | 94056120            |
| GTIN                                    | 4260682157522       |



## TECHNICAL DRAWING

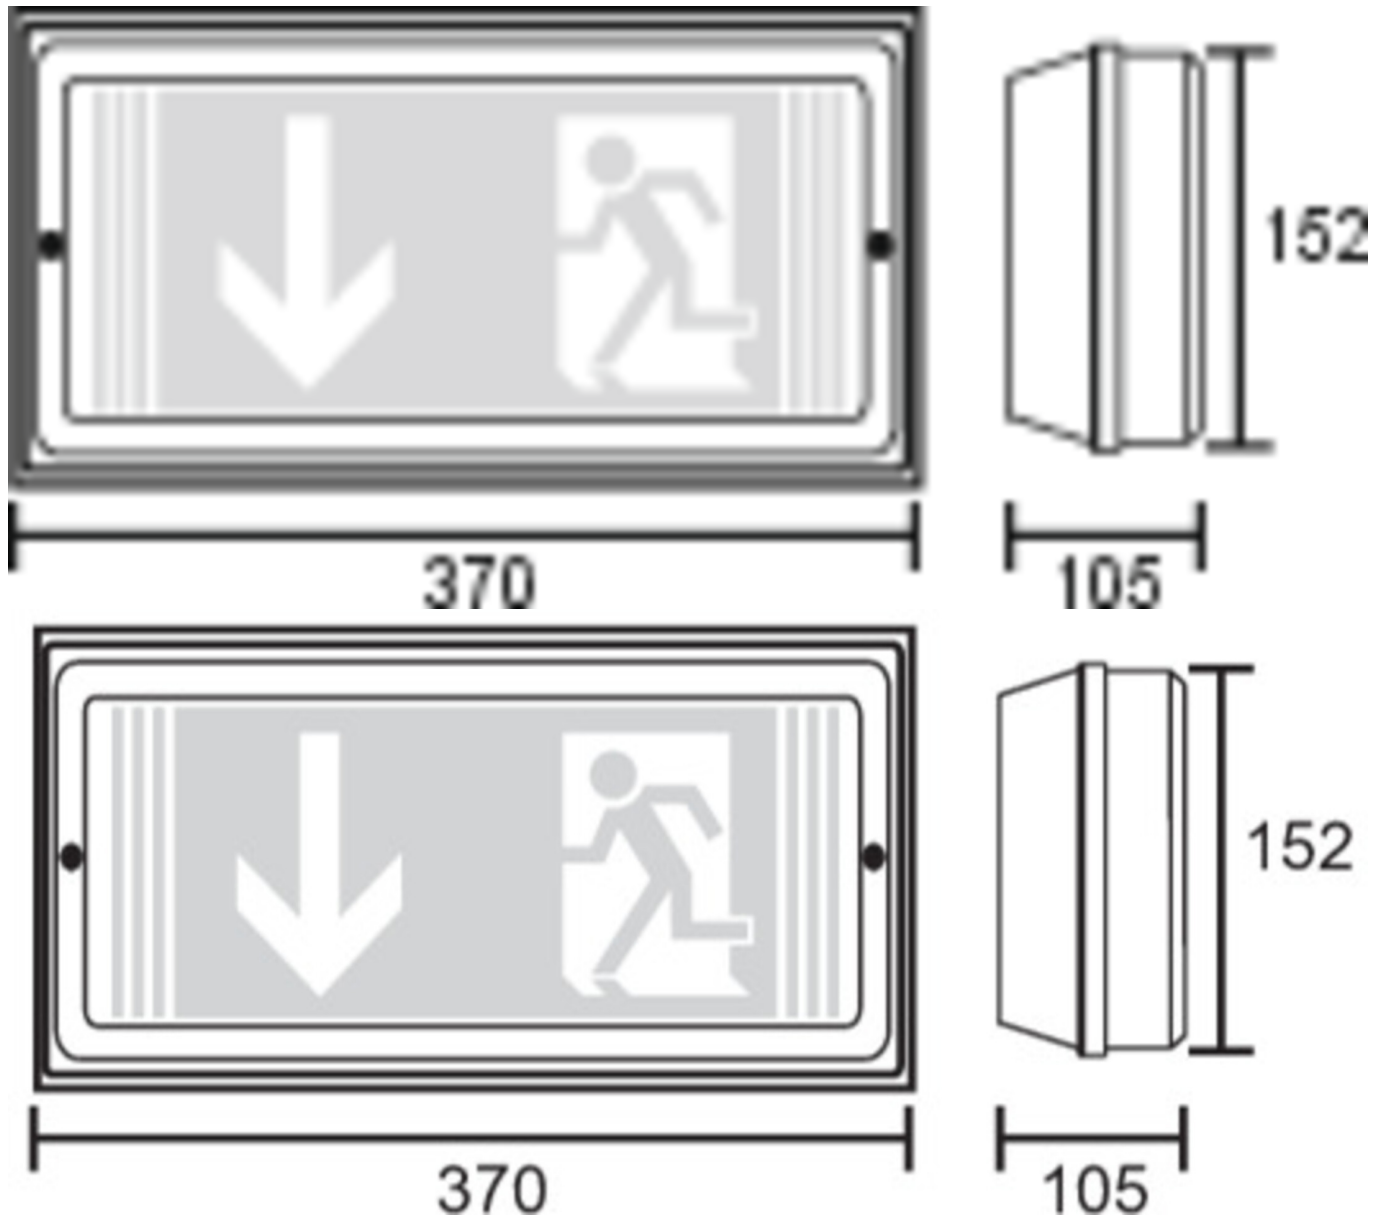

## ACCESSORY LIST

BALL2 - Wire mesh guard



## RELATED PRODUCTS

| Art.-No.   | Image | Monitoring                | Supply               | Color    | Investment | Automatic log | Maintenance level | Remote maintenance | max. luminaires  | Single luminaire monitoring |
|------------|-------|---------------------------|----------------------|----------|------------|---------------|-------------------|--------------------|------------------|-----------------------------|
| PFW019ML   |       | Central power supply (ML) | Central power supply | RAL 9003 | €€€        | Yes           | low               | Yes                | 1,920 per system | central                     |
| PFW019ML-P |       | Central power supply (ML) | Central power supply | RAL 9003 | €€€        | Yes           | low               | Yes                | 1,920 per system | central                     |
| PFW519CC-P |       | CoreCompact 24 (CC)       | Central power supply | RAL 9003 | €€         | Yes           | low               | Yes                |                  | central                     |

As of: 15.07.2026 - Subject to technical changes and errors.