
## Art.-Nr: DDE039ML
## Emergency light Centralised power supply systems Ceiling mounting, Central power supply (ML), CPS, IP40, Zinc die-cast, White

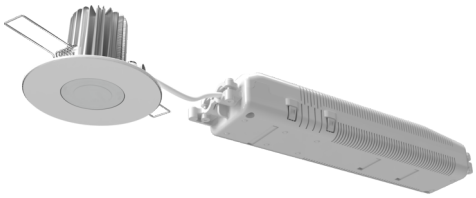

Powerful LED safety luminaire for recessed mounting in the ceiling. Both the spotlight and cooling element are made from high-grade zinc die-cast.

The structure, as well as the material used, ensure good heat dissipation and a long LED life. The compact design permits mounting in a 68mm opening in the ceiling. It is secured with ease using tension springs.

By changing the driver settings a lower power consumption and light output can be achieved.

| | | |
|---|---|---|
| Approx. 825lm | 7,6W | MLED-Driver setting 24V / 300mA |
| Approx. 410lm | 4,6W | MLED-Driver setting 24V / 150mA |

Control and monitoring via central power supply system.


More information
www.rp-group.com/en/item/DDE039ML

## TECHNICAL DATA

| | |
|---|---|
| Luminaire type | Emergency light |
| Mounting | Ceiling mounting |
| Pictograph | No |
| Illuminant | LED |
| Housing material | Zinc die-cast |
| Housing color | White |
| Protection type (IP) | IP40 |
| Impact resistance (IK) | 8 |
| Certification | Waste disposal, CE, Type-tested, ENEC |
| Insulation class | 2 |
| Supply | Centralised power supply systems |
| Monitoring | Central power supply (ML) |
| Bridging time | CPS |
| Battery | / |
| Operating mode | single luminaire switching |
| Input voltage AC | 230 V |

| | |
|---|---|
| Input frequency | 50 / 60 Hz |
| Input voltage DC | 216 V |
| Power max. | 9,6 W |
| Power maintained | 9,6 W |
| Power non-maintained | 1,1 W |
| Ambient temperature maintained mode | -10 °C to 40 °C |
| Ambient temperature non-maintained mode | -10 °C to 50 °C |
| Height | 58 mm |
| Diameter | 88 mm |
| Installation height | 110 mm |
| Installation dimensions Diameter | 68 mm |
| Weight | 0.4 |
| Weight incl. packaging | 0.53 |
| Connection cross-section | 2.5 mm² |
| Switching input | Yes |
| Emergency light blocking | No |
| Battery connection | No |
| Dimming function | Yes |
| Luminous flux mains | 1100 lm |
| Luminous flux emergency | 1100 lm |
| Customs tariff number | 94056180 |
| GTIN | 4260682158284 |

## TECHNICAL DRAWING

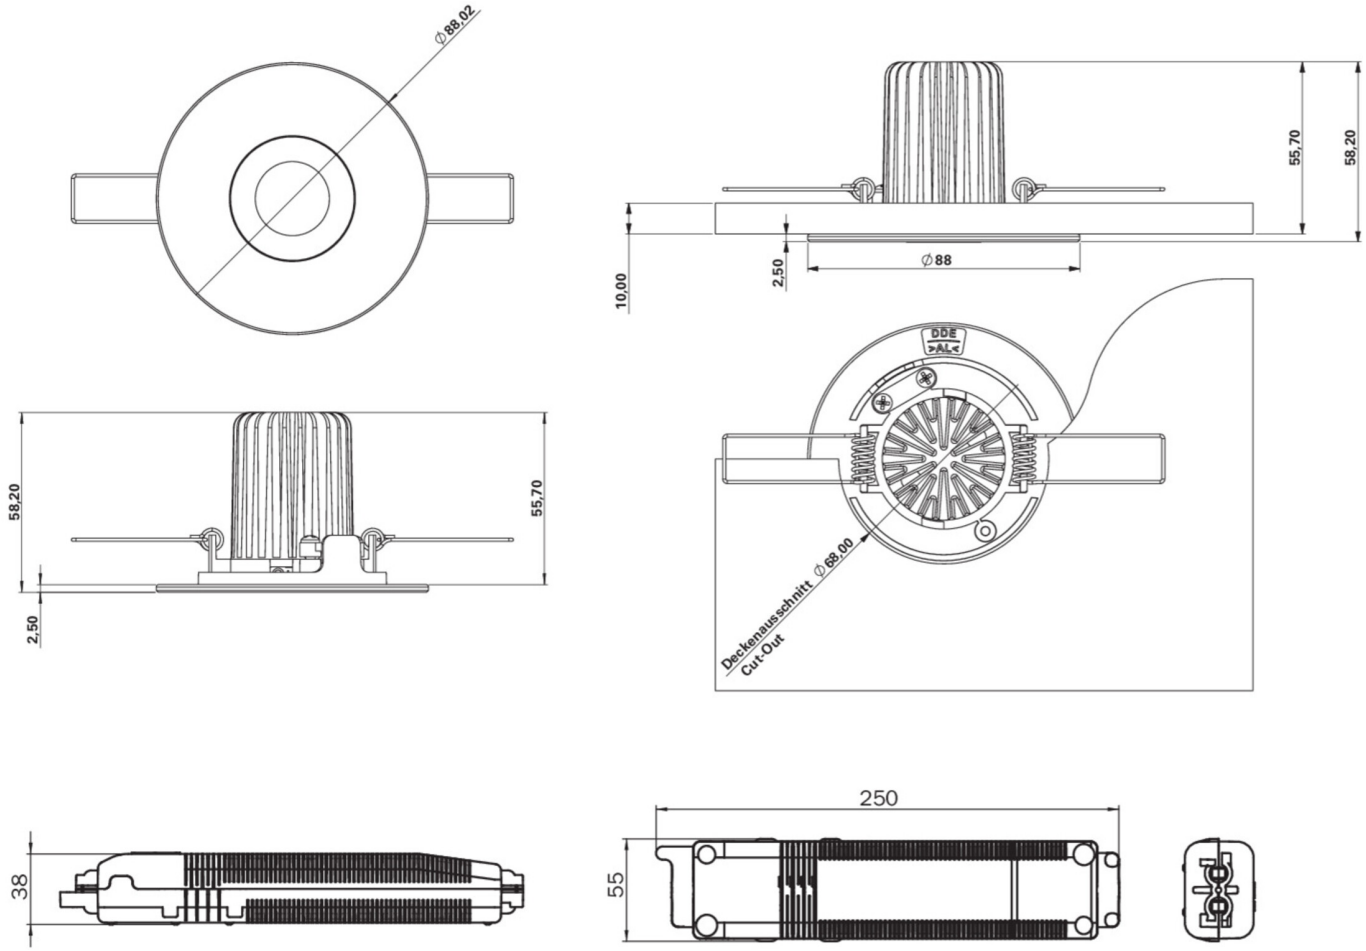


## ACCESSORY LIST

BALLPLX-ILE - Ball impact-resistant protective cover (PMMA) transparent for lights - ILE

## RELATED PRODUCTS

| Art.-No. | Image | Monitoring | Supply | Color | Investment | Automatic log | Maintenance level | Remote maintenance | max. luminaires | Single luminaire monitoring |
|---|---|---|---|---|---|---|---|---|---|---|

As of: 18.11.2026 - Subject to technical changes and errors.