



Art.-Nr: YFLSO-LANS-5001
LED floodlight "SOLID"
wall / ceiling surface mounting

LED spotlight, SOLID series. Die-cast aluminium housing, suitable for outdoor use, colour: black, powder-coated. Cover made of tempered glass. Robust housing with IP 66 and high impact resistance IK08. Powerful LED technology with over 140lm/W for effective illumination of large areas. Switchable control gear, built-in. Extremely flexible use thanks to flat design and adjustable angle of inclination. Connection via open cable end.



More information

www.rp-group.com/en/item/YFLSO-LANS-5001



TECHNICAL DATA


Dimensions	
Product dimensions Length	247 mm
Product dimensions Width	187 mm
Product dimensions Height	37 mm
Product weight	1,100 g
Color	
Color	Black
Housing material	
Housing material	Aluminum die-cast
Certification	
Certification	CE, RoHS
Insulation class	1
Protection type (IP)	IP66
Shock resistance level (IK)	8
Electrical connection	
Rated power	50 W
Input voltage AC	220-240V / 50-60Hz V



Power factor	0.9 PF
power supply	
DC suitability	Yes
Electrical design	with internal control gear
Light data	
Light source	LED
Rated luminous flux	7000 lm
Colour rendering index	> 70 Ra
Beam angle	97 °
Color temperature	4000 K
Light color	740
Service life	120000 h, L80
Light yield	140 lm/w
Temperatures	
Ambient temperature (Min)	-30 °C
Ambient temperature (Max)	50 °C
CASAMBI Products	
Input voltage DC	216 V
Mounting	
Mounting	Universal



TEXT.LICHTVERTEILUNG

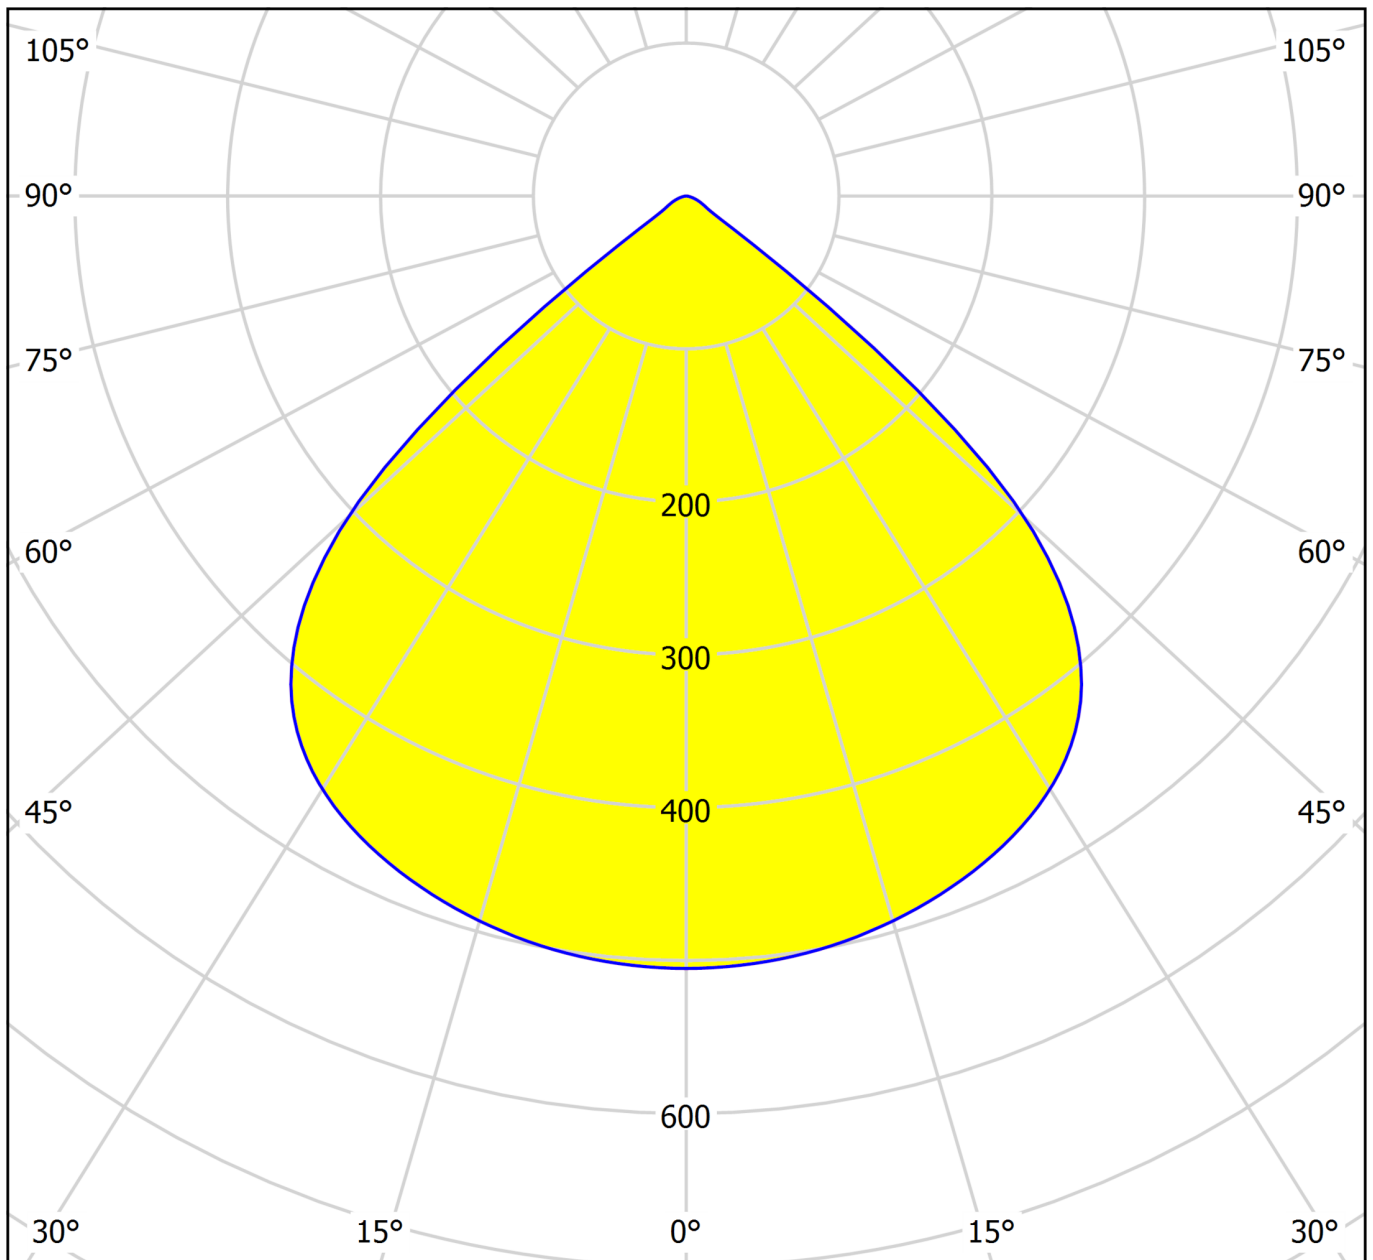


cd/klm

— C0 - C180

— C90 - C270

$\eta = 100\%$

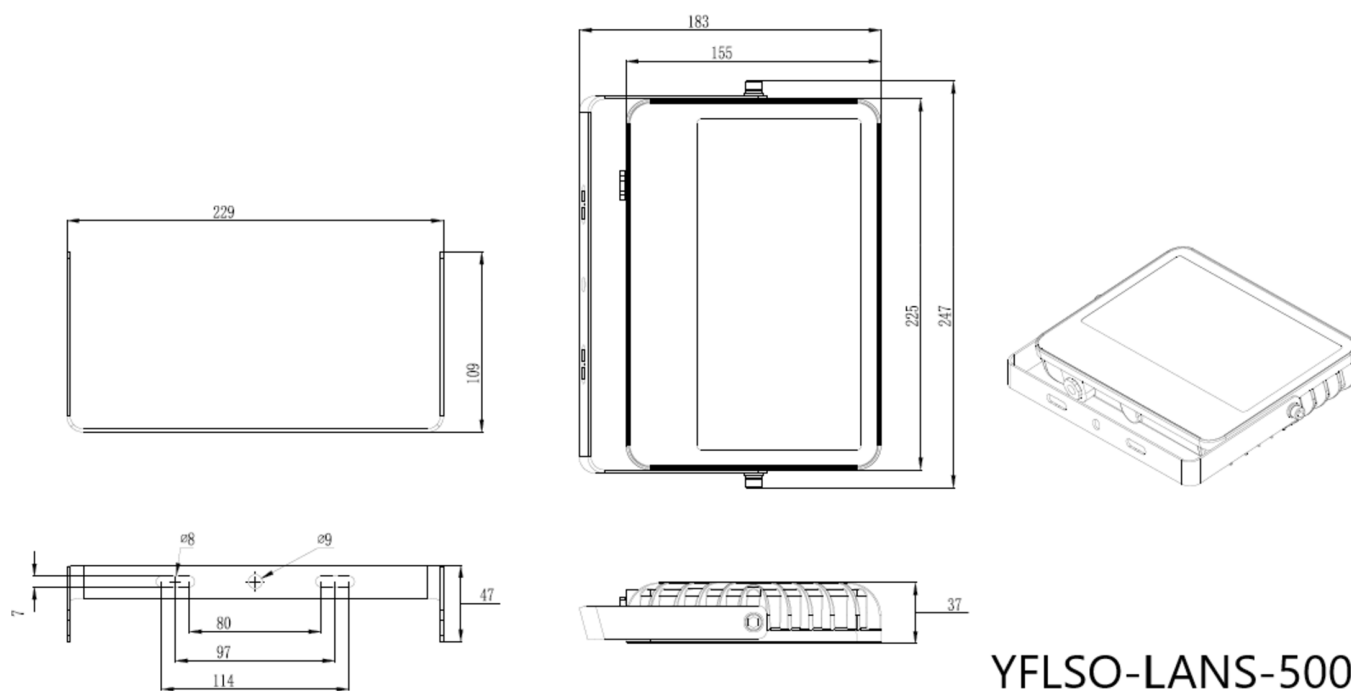

As of: 09.05.2026 - Subject to technical changes and errors.