RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

Art.-Nr: WFXW019
Exit sign Centralised power supply systems Wall mounting, Without monitoring, CPS, 30 m, IP65, Polycarbonate, White, Piktogram as reqired



Modern exit sign wall luminaire in a square format.

For marking escape and rescue routes. Optionally, the light can be used to mark other adjacent rooms, such as showers, restrooms, or changing rooms.

The easy-to-install bayonet lock allows for safe opening and closing of the light. It also ensures a high protection rating, making the light versatile and flexible.

The requested pictogram (arrow to the right, left, up or down) is supplied as standard.

CE D

More information
www.rp-group.com/en/item/WFXW019

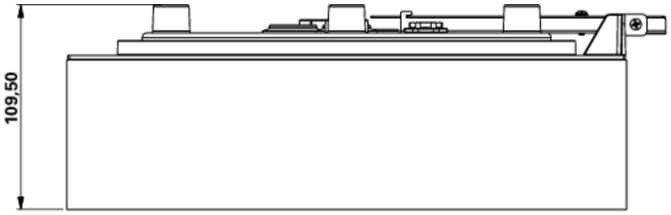
TECHNICAL DATA

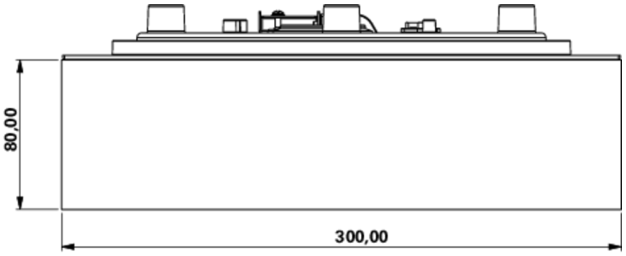
Luminaire type	Exit sign
Mounting	Wall mounting
Recognition distance	30 m
Pictograph	acc. to Specification
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	4
Certification	Waste disposal, CE, D-sign
Insulation class	2
Supply	Centralised power supply systems
Monitoring	Without monitoring
Bridging time	CPS
Battery	/
Operating mode	Permanent circuit
Input voltage AC	230 V
Input frequency	50 / 60 Hz

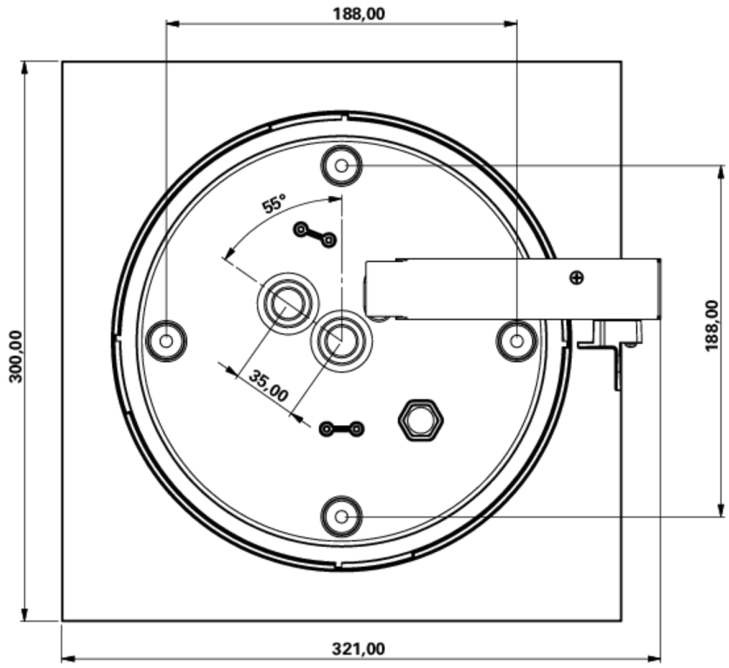
Input voltage DC	100-254 V
Power max.	4,6 W
Power maintained	4,6 W
Power non-maintained	0 W
Ambient temperature maintained mode	-20 °C to 40 °C
Ambient temperature non-maintained mode	-20 °C to 40 °C
Depth	300 mm
Width	300 mm
Height	110 mm
Weight	1.34
Weight incl. packaging	1.59
Connection cross-section	1.5 mm²
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	No
Luminous flux mains	520 lm
Luminous flux emergency	520 lm
Customs tariff number	94056180
GTIN	4260682158468

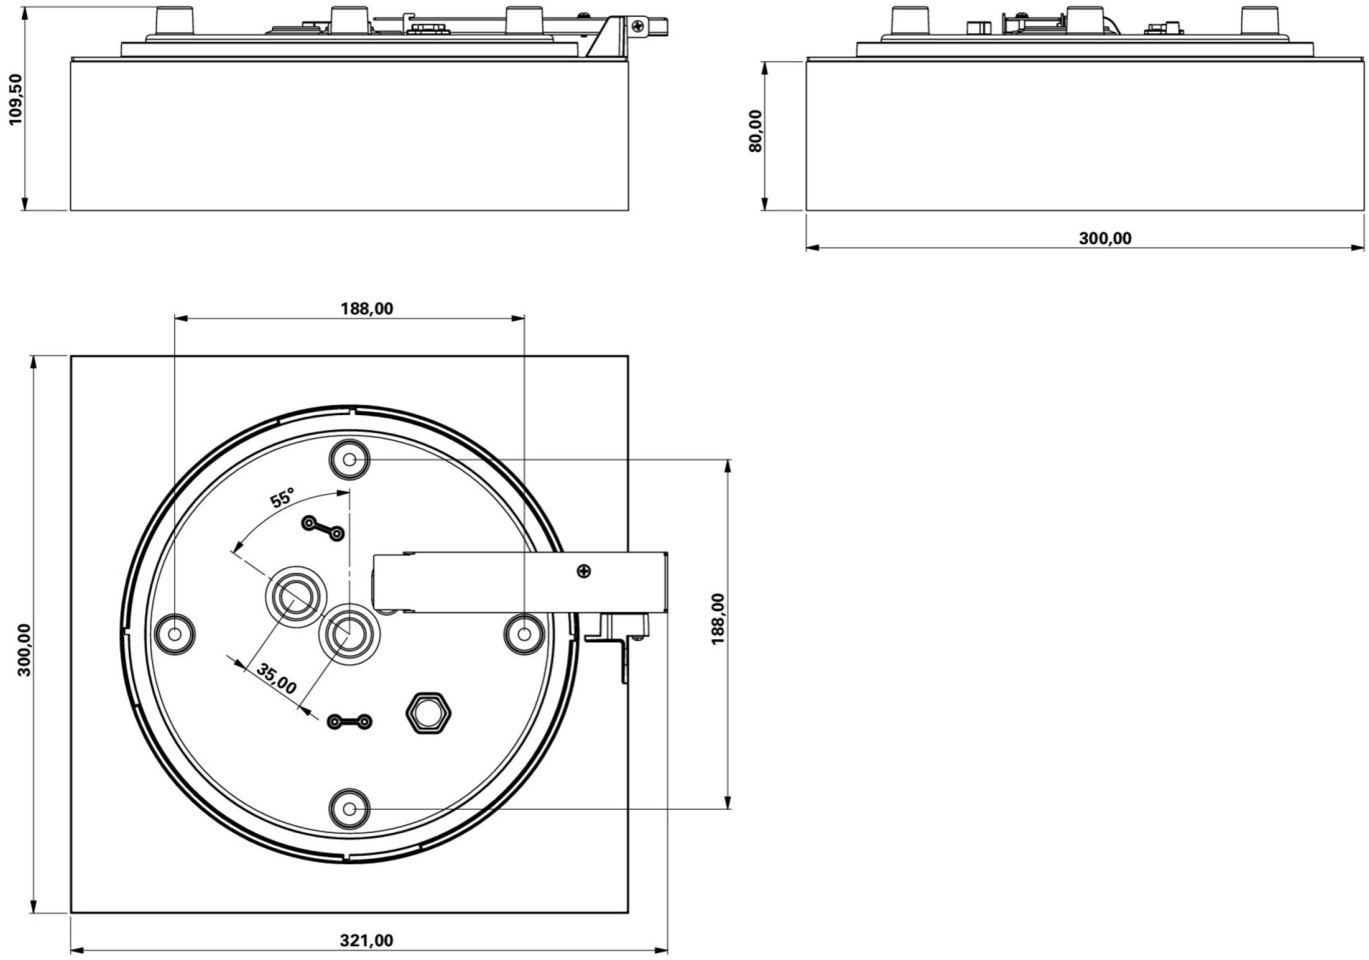
RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

TECHNICAL DRAWING


109,50


80,00
300,00


188,00
300,00
55°
35,00
188,00
321,00



As of: 13.11.2026 - Subject to technical changes and errors.