RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

Art.-Nr: PMW403WL
Exit sign Self-contained
Wall mounting, Wireless Professional (WL), 3 h, 20 m, IP65, Polycarbonate, White, Set of pictograms



Polycarbonate LED emergency exit sign luminaire with convex shaped cover for wall mounting.

To help with mounting, levelling screws are integrated to compensate for uneven surfaces.

The set of pictograms is inserted on the inside and secured without the use of solvents.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (2x man in the door and 2 straight arrows) are supplied as standard.


More information
www.rp-group.com/en/item/PMW403WL

TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Wall mounting
Recognition distance	20 m
Pictograph	Set
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	Waste disposal, CE, 5 Years waranty, HACCP (food law conformity), D-sign
Insulation class	2
Supply	Self-contained
Monitoring	Wireless Professional (WL)
Bridging time	3 h
Battery	LiFePO4 3,2 V/1,6 Ah
Operating mode	Non-maintained / maintained

Input voltage AC	230 V
Input frequency	50 Hz
Power max.	3,8 W
Power maintained	2,9 W
Power non-maintained	0,8 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	65 mm
Width	236 mm
Height	136 mm
Weight	0.72
Weight incl. packaging	0.85
Connection cross-section	2.5 mm²
Switching input	Yes
Emergency light blocking	Yes
Battery connection	Connector
Dimming function	Yes
Customs tariff number	94056120
GTIN	4260682158994

TECHNICAL DRAWING

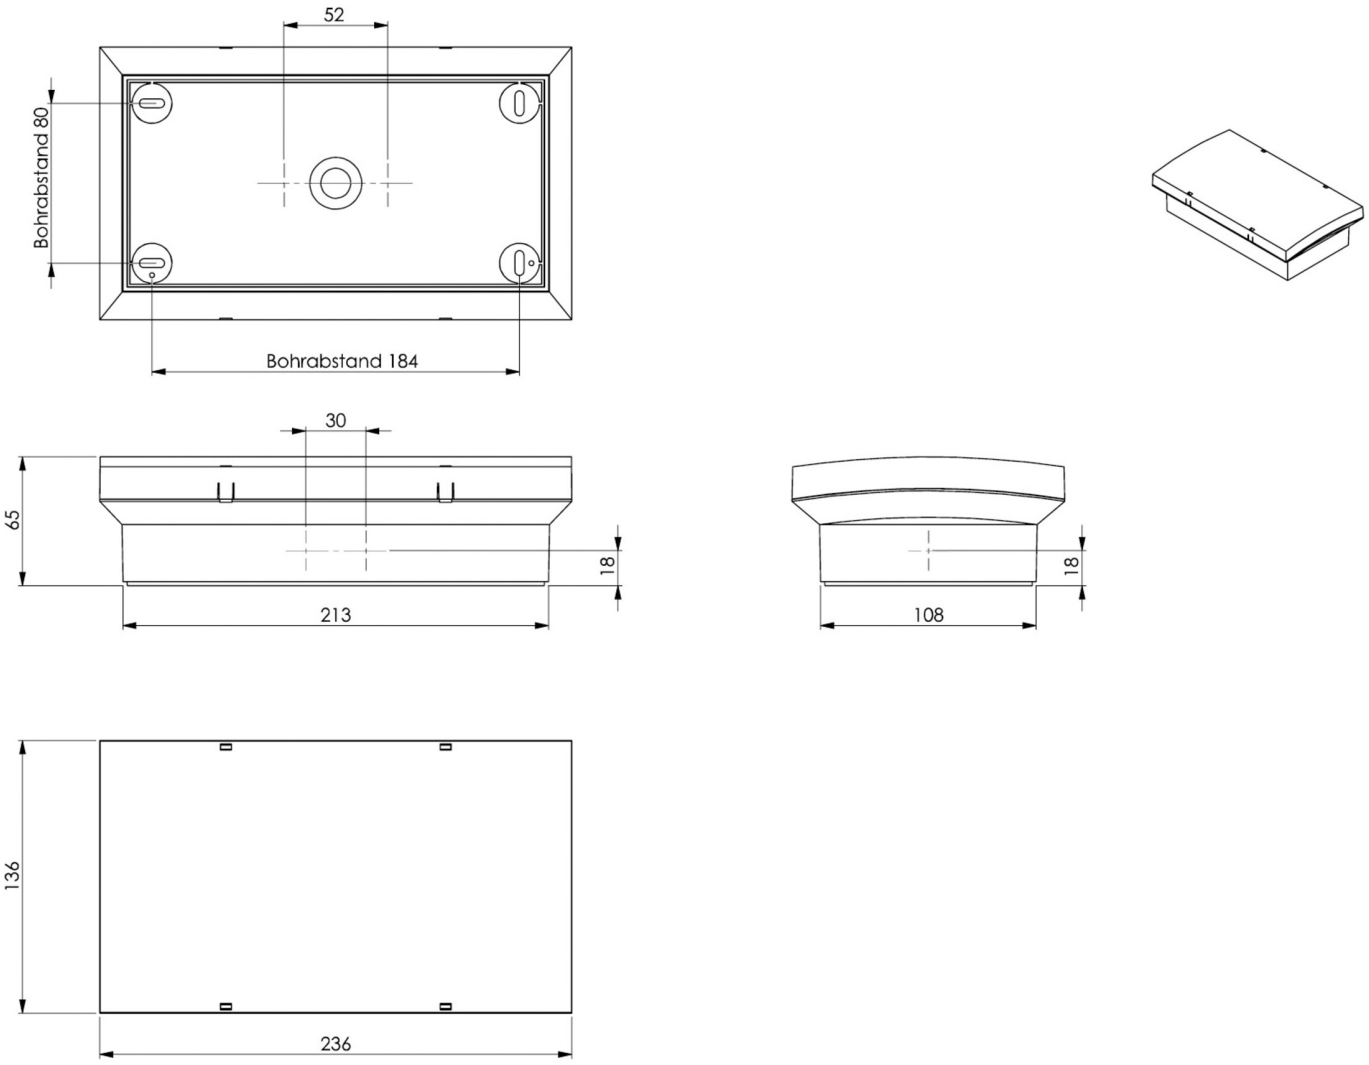

ACCESSORY LIST

PME - Professional module housing for sophisticated electrical engineering

LFP3216-SET-2AKKU - Battery

RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
PMW003SC		SelfControl (SC)	Single battery	RAL 9003	€	no	high	no	unlimited	itself