



**Art.-Nr: KMMU013SC**  
**Exit sign Self-contained**  
**Universal, 3 h, 24 m, IP43, Polycarbonate, White, Set of**  
**pictograms, Universal mounting**

Slim convex emergency exit sign luminaire with clear, closed surround, which tapers downwards in a continuous and symmetrical manner. Suited to inscription on one or two sides. The pictograms are on the inside and are inserted without the use of solvents.

Thanks to the snap-in mechanism between the upper and lower part, the luminaire has a harmonious look and appears closed all the way round. The luminaire is connected to the mains in the ceiling section. When closed, the luminaire is powered via contact plugs. This greatly simplifies mounting and makes convenient connection possible despite the small size of the luminaire.

Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard. Universal mounting includes fitting on the wall and ceiling as well as the option of fitting in the ceiling in conjunction with the mounting frame available.



More information  
[www.rp-group.com/en/item/KMMU013SC](http://www.rp-group.com/en/item/KMMU013SC)



## TECHNICAL DATA


|                        |                  |
|------------------------|------------------|
| Luminaire type         | Exit sign        |
| Mounting               | Universal        |
| Recognition distance   | 24 m             |
| Pictograph             | Set              |
| Illuminant             | LED              |
| Housing material       | Polycarbonate    |
| Housing color          | White            |
| Protection type (IP)   | IP43             |
| Impact resistance (IK) | 3                |
| Certification          | WEEE, CE         |
| Insulation class       | 2                |
| Supply                 | Self-contained   |
| Monitoring             | SelfControl (SC) |



|                                         |                             |
|-----------------------------------------|-----------------------------|
| Bridging time                           | 3 h                         |
| Battery                                 | LiFePO4 3,2 V/3,3 Ah        |
| Operating mode                          | Non-maintained / maintained |
| Input voltage AC                        | 230 V                       |
| Input frequency                         | 50 / 60 Hz                  |
| Input voltage DC                        | - V                         |
| Power max.                              | 4,6 W                       |
| Power maintained                        | 3,3 W                       |
| Power non-maintained                    | 1 W                         |
| Ambient temperature maintained mode     | -5 °C to 40 °C              |
| Ambient temperature non-maintained mode | -5 °C to 40 °C              |
| Depth                                   | 35 mm                       |
| Width                                   | 251 mm                      |
| Height                                  | 173 mm                      |
| Weight                                  | 0.7                         |
| Weight incl. packaging                  | 0.8                         |
| Connection cross-section                | 2.5 mm <sup>2</sup>         |
| Switching input                         | Yes                         |
| Emergency light blocking                | No                          |
| Battery connection                      | Connector                   |
| Dimming function                        | No                          |
| Luminous flux mains                     | 190 lm                      |
| Luminous flux emergency                 | 190 lm                      |
| Customs tariff number                   | 94056120                    |
| GTIN                                    | 4260659566524               |



## TECHNICAL DRAWING

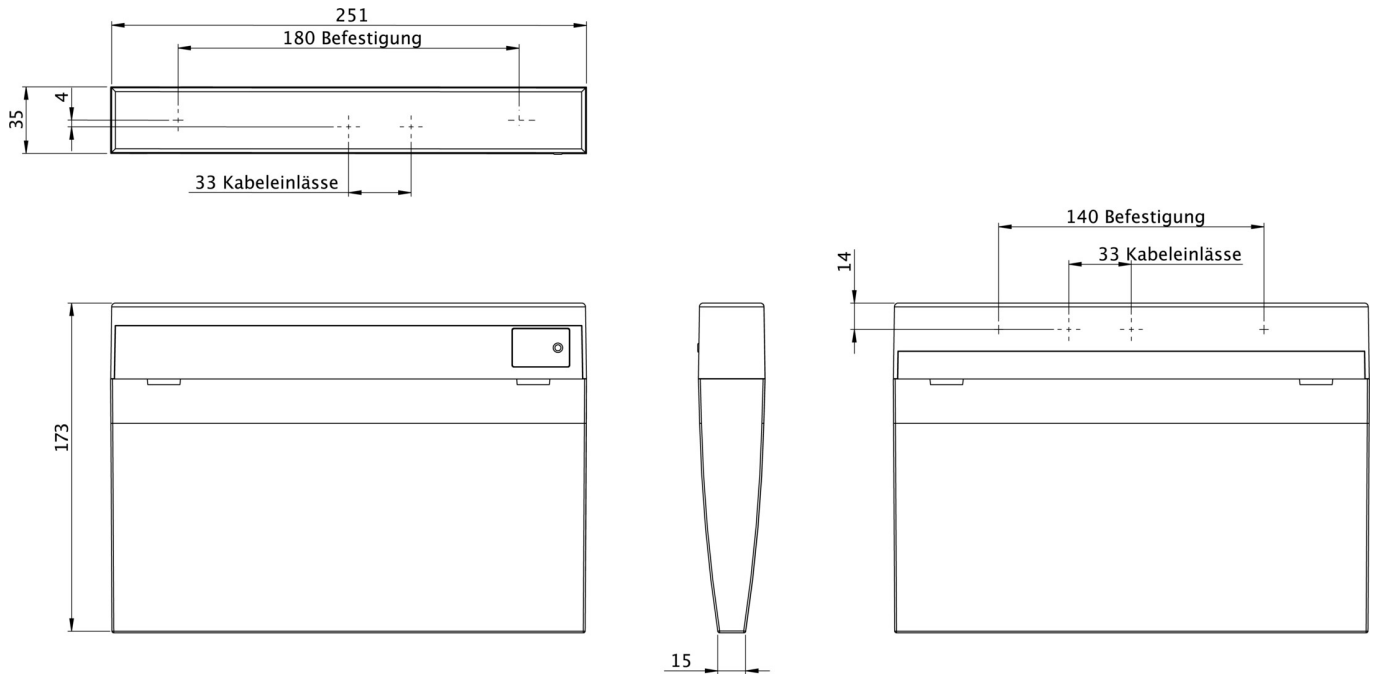

## ACCESSORY LIST

- DSA - Wire suspension
- KME-EB - Mounting frame
- KMBE - Concrete-mounted box
- AWKSU - Wall bracket
- 2PW-EB - Pendant
- BALLPLX-KMU.01 -
- LFP32057.K - Battery

## RELATED PRODUCTS

| Art.-No.  | Image | Monitoring                 | Supply         | Color    | Investment | Automatic log | Maintenance level | Remote maintenance | max. luminaires  | Single luminaire monitoring |
|-----------|-------|----------------------------|----------------|----------|------------|---------------|-------------------|--------------------|------------------|-----------------------------|
| KMMU013WB |       | Wireless Basic (WB)        | self contained | RAL 9003 | €€         | yes           | low               | yes                | 50               | central                     |
| KMMU013WL |       | Wireless Professional (WL) | self contained | RAL 9003 | €€         | yes           | low               | yes                | 1,000 per system | central                     |

As of: 22.07.2026 - Subject to technical changes and errors.