



Art.-Nr: PMW039ML
Emergency light Centralised power supply systems
Universal, CPS, IP65, Polycarbonate, White, Flexiklick

Polycarbonate safety luminaire with convex shaped cover.

To help with mounting, levelling screws are integrated to compensate for uneven surfaces.


The luminaire can be mounted by fitting on the wall and ceiling as well as fitting in the ceiling in conjunction with the mounting frame available.

By changing the driver settings a lower power consumption and light output can be achieved.

Approx. 825lm 7,6W MLED-Driver setting 24V / 300mA

Approx. 410lm 4,6W MLED-Driver setting 24V / 150mA

Control and monitoring via central power supply system. The luminaire is fitted with the innovative flexible plug-in system for rapid use of the right lens. The corridor lens is supplied with every luminaire. A round lens, spotlight lens and beam lens are available as options.

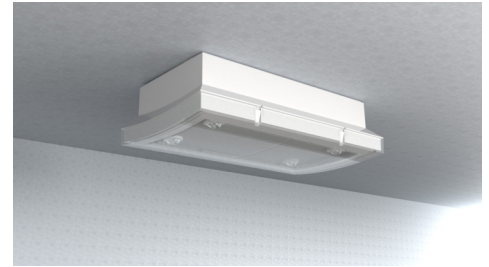

More information
www.rp-group.com/en/item/PMW039ML



TECHNICAL DATA

Luminaire type	Emergency light
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	CE, WEEE, D-Sign, TÜV Rheinland Type approved, ENEC, HACCP
Insulation class	2
Supply	Centralised power supply systems
Monitoring	Central power supply (ML)
Bridging time	CPS
Battery	/



Operating mode	single luminaire switching
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	216 V
Power max.	9,7 W
Power maintained	9,7 W
Power non-maintained	1,1 W
Ambient temperature maintained mode	-20 °C to 40 °C
Ambient temperature non-maintained mode	-20 °C to 40 °C
Depth	65 mm
Width	236 mm
Height	136 mm
Weight	0.67
Weight incl. packaging	0.8
Connection cross-section	2.5 mm ²
Switching input	Yes
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Luminous flux mains	1050 lm
Luminous flux emergency	1050 lm
Customs tariff number	94056120
GTIN	4260682149442



TECHNICAL DRAWING



ACCESSORY LIST

- PME - Professional module housing for sophisticated electrical engineering
- LSYS-B4 - Precision beam lens for accent lighting of safety devices
- LSYS-F4 - Precise corridor lens for emergency exit and corridor lighting
- LSYS-H4 - H-lens Special optics for emergency lighting in escape and rescue routes (installation height from 4 m)
- LSYS-R4 - High-performance round lens for uniform emergency light distribution in open areas
- LSYS-S4 - Precision spot lens for emergency lighting in large areas and high ceilings
- LSYS-WF4 - Precise wall-corridor lens – Optimal light control for safety lights



RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
PMW009ML		Central power supply (ML)	Central power supply	RAL 9003	€€€	Yes	low	Yes	1,920 per system	central

As of: 04.08.2026 - Subject to technical changes and errors.