



**Art.-Nr: PMW001SC**  
**Exit sign Self-contained**  
**Wall mounting, 1 h, 20 m, IP65, Polycarbonate, White, Set of pictograms**

Polycarbonate LED emergency exit sign luminaire with convex shaped cover for wall mounting.

To help with mounting, levelling screws are integrated to compensate for uneven surfaces.

The set of pictograms is inserted on the inside and secured without the use of solvents.

Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (2x man in the door and 2 straight arrows) are supplied as standard.



More information

[www.rp-group.com/en/item/PMW001SC](http://www.rp-group.com/en/item/PMW001SC)



## TECHNICAL DATA


|                        |                             |
|------------------------|-----------------------------|
| Luminaire type         | Exit sign                   |
| Mounting               | Wall mounting               |
| Recognition distance   | 20 m                        |
| Pictograph             | Set                         |
| Illuminant             | LED                         |
| Housing material       | Polycarbonate               |
| Housing color          | White                       |
| Protection type (IP)   | IP65                        |
| Impact resistance (IK) | 6                           |
| Certification          | WEEE, CE, D-Sign, HACCP     |
| Insulation class       | 2                           |
| Supply                 | Self-contained              |
| Monitoring             | SelfControl (SC)            |
| Bridging time          | 1 h                         |
| Battery                | NIMH 4,8 V/2,0 Ah           |
| Operating mode         | Non-maintained / maintained |



|                                         |                     |
|-----------------------------------------|---------------------|
| Input voltage AC                        | 230 V               |
| Input frequency                         | 50 / 60 Hz          |
| Power max.                              | 4,2 W               |
| Power maintained                        | 3 W                 |
| Power non-maintained                    | 0,35 W              |
| Ambient temperature maintained mode     | -5 °C to 40 °C      |
| Ambient temperature non-maintained mode | -5 °C to 40 °C      |
| Depth                                   | 65 mm               |
| Width                                   | 236 mm              |
| Height                                  | 136 mm              |
| Weight                                  | 0.79                |
| Weight incl. packaging                  | 0.92                |
| Connection cross-section                | 2.5 mm <sup>2</sup> |
| Switching input                         | Yes                 |
| Emergency light blocking                | Yes                 |
| Battery connection                      | Connector           |
| Dimming function                        | Yes                 |
| Customs tariff number                   | 94056120            |
| GTIN                                    | 4260682158895       |



## TECHNICAL DRAWING

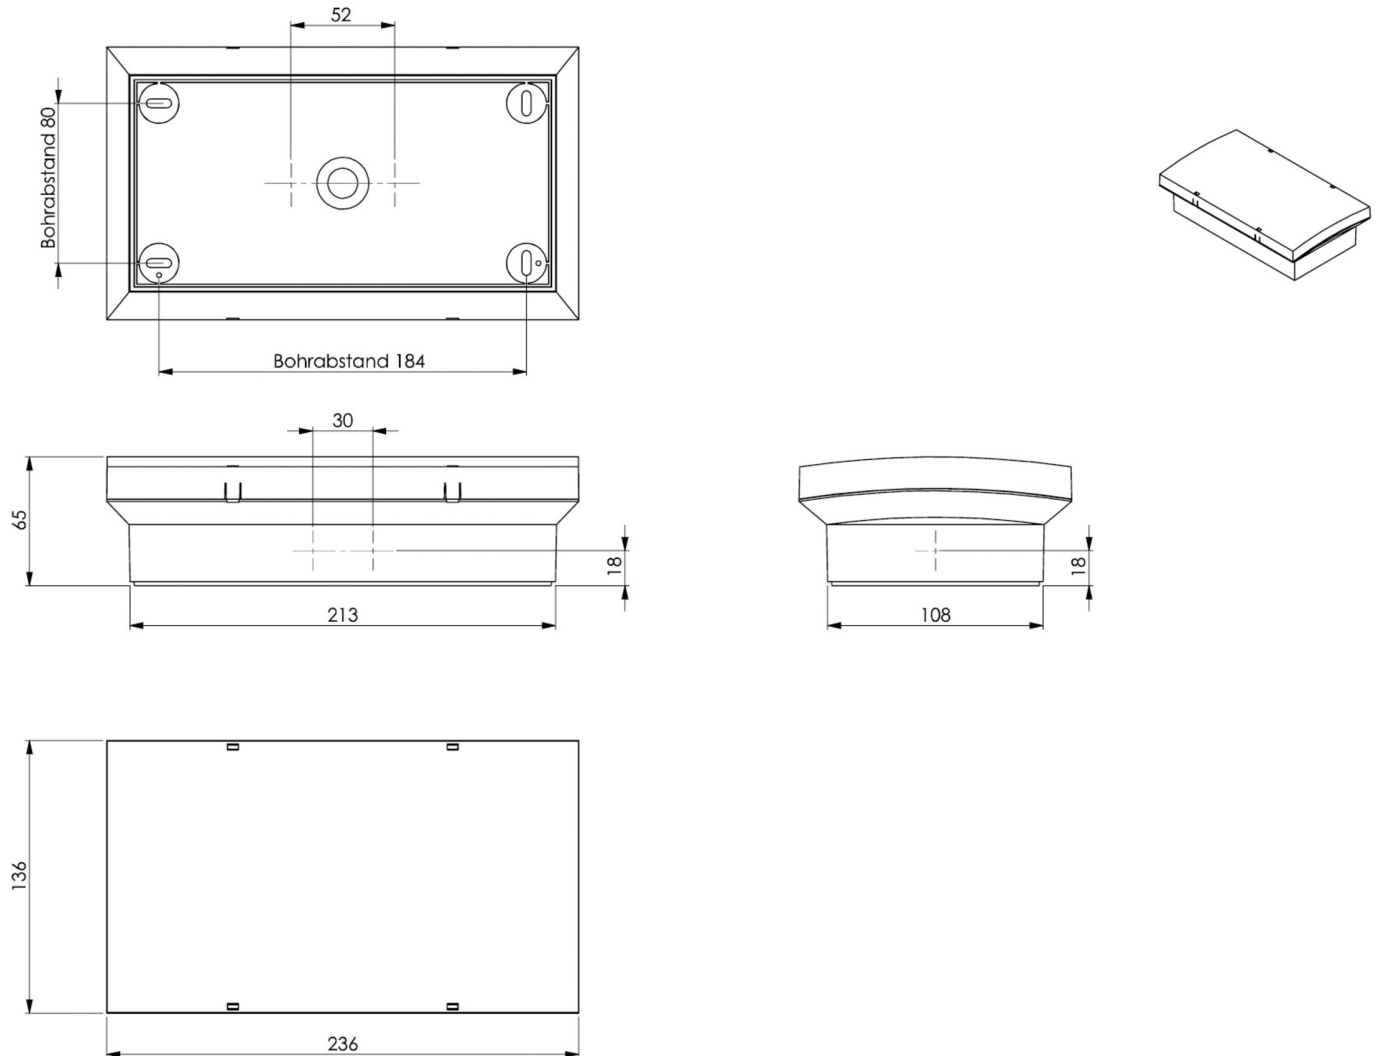

## ACCESSORY LIST

PME - Professional module housing for sophisticated electrical engineering

NIMHHT4820Q - Battery



## RELATED PRODUCTS

| Art.-No. | Image | Monitoring                 | Supply         | Color    | Investment | Automatic log | Maintenance level | Remote maintenance | max. luminaires  | Single luminaire monitoring |
|----------|-------|----------------------------|----------------|----------|------------|---------------|-------------------|--------------------|------------------|-----------------------------|
| PMW401WL |       | Wireless Professional (WL) | self contained | RAL 9003 | €€         | yes           | low               | yes                | 1,000 per system | central                     |

As of: 23.07.2026 - Subject to technical changes and errors.