## Art.-Nr: KSC019ML-SW
## Exit sign, Emergency light Centralised power supply systems Universal, Central power supply (ML), CPS, 22 m, IP54, Polycarbonate, Black, Set of pictograms, Universal mounting




Innovative plastic emergency exit sign and safety luminaire for universal mounting. Suited to inscription on one or two sides, as well as illumination of firefighting and first aid stations, with the 5 lux rating required as a minimum according to EN 1838.

Thanks to the snap-in mechanism between the upper and lower part, the luminaire has a harmonious look and appears closed all the way round. The luminaire is connected to the mains in the ceiling section. When closed, the luminaire is powered via contact plugs. This greatly simplifies mounting and makes convenient connection possible despite the small size of the luminaire.

Control and monitoring via central power supply system. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard. Universal mounting includes fitting on the wall and ceiling as well as the option of fitting in the ceiling in conjunction with the mounting frame available.

CE


More information
www.rp-group.com/en/item/KSC019ML-SW

## TECHNICAL DATA

| | |
|---|---|
| Luminaire type | Exit sign, Emergency light |
| Mounting | Universal |
| Recognition distance | 22 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | Polycarbonate |
| Housing color | Black |
| Protection type (IP) | IP54 |
| Impact resistance (IK) | ≥ 3 |
| Certification | Waste disposal, CE |
| Insulation class | 2 |
| Supply | Centralised power supply systems |
| Monitoring | Central power supply (ML) |

| | |
|---|---|
| Bridging time | CPS |
| Battery | / |
| Operating mode | single luminaire switching |
| Input voltage AC | 230 V |
| Input frequency | 50 / 60 Hz |
| Input voltage DC | 216 V |
| Power max. | 2,3 W |
| Power maintained | 2,3 W |
| Power non-maintained | 1 W |
| Ambient temperature maintained mode | -30 °C to 40 °C |
| Ambient temperature non-maintained mode | -30 °C to 40 °C |
| Depth | 34 mm |
| Width | 250 mm |
| Height | 174 mm |
| Weight | 0.62 |
| Weight incl. packaging | 0.7 |
| Connection cross-section | 1.5 mm² |
| Switching input | No |
| Emergency light blocking | No |
| Battery connection | No |
| Dimming function | Yes |
| Luminous flux mains | 220 lm |
| Luminous flux emergency | 220 lm |
| EOF | 1 |
| Customs tariff number | 94056120 |
| GTIN | 4260766550287 |

## TECHNICAL DRAWING

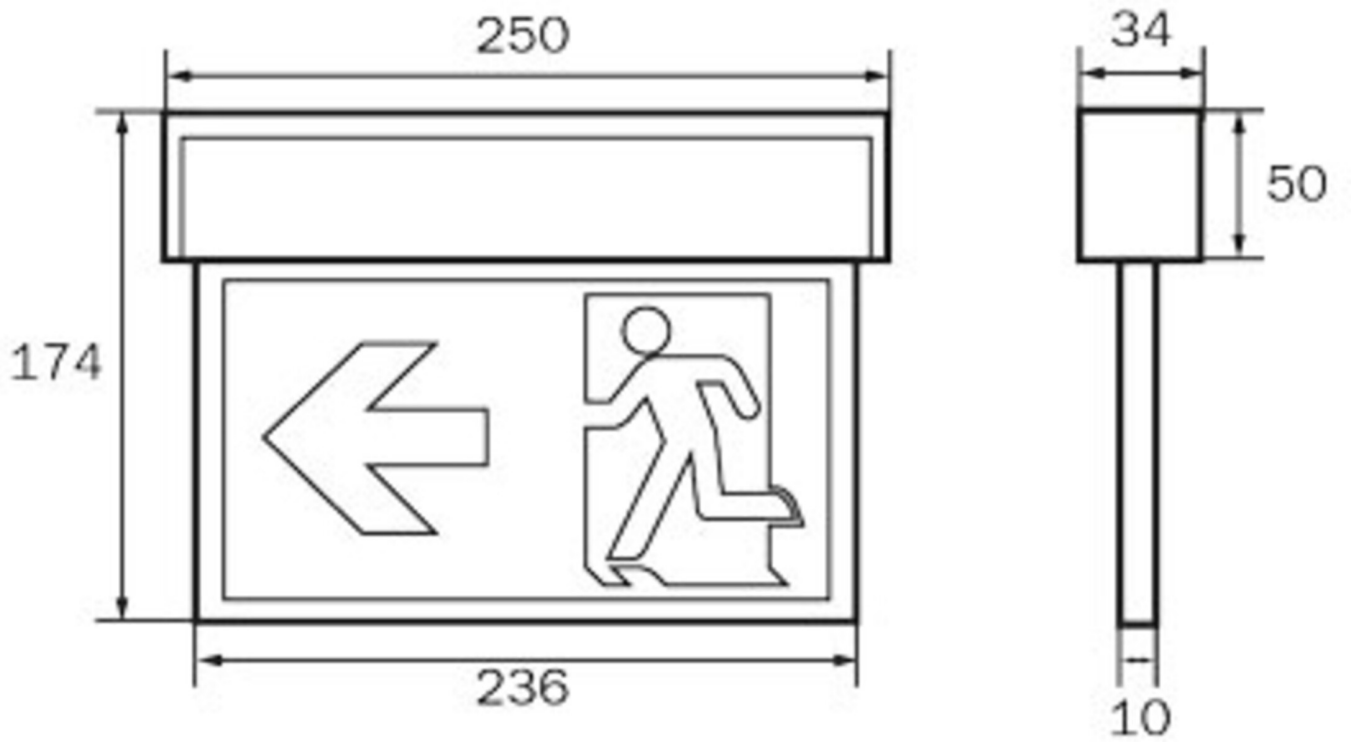


## ACCESSORY LIST

DSA - Wire suspension

AWKSU - Wall bracket

2PW-EB - Pendant

KMBE - Concrete-mounted box

BALLPLX-KMU.01 - Ball impact-resistant protective cover (PMMA) transparent for lights - KMU, KSU und ASMU

KS4FIRE - Comprehensive pictogram set for firefighting and alarm equipment (8 pieces)

KS4HELP - Essential pictogram set for safety and emergency signage

KME-SW - Mounting frame

## RELATED PRODUCTS

| Art.-No. | Image | Monitoring | Supply | Color | Investment | Automatic log | Maintenance level | Remote maintenance | max. luminaires | Single luminaire monitoring |
|---|---|---|---|---|---|---|---|---|---|---|
| KSC019-SW |  | Without monitoring | | RAL 9005 | | | | | | |
| KSC519CC-SW |  | CoreCompact 24 (CC) | Central power supply | RAL 9005 | €€ | Yes | low | Yes | | central |
| KSC019ML |  | Central power supply (ML) | Central power supply | RAL 9003 | €€€ | Yes | low | Yes | 1,920 per system | central |
| KSC519CC |  | CoreCompact 24 (CC) | Central power supply | RAL 9003 | €€ | Yes | low | Yes | | central |

As of: 11.11.2026 - Subject to technical changes and errors.