RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

Art.-Nr: KWIW413WL
Exit sign, Emergency light Self-contained Wall mounting, Wireless Professional (WL), 3 h, 16 m, IP65, Polycarbonate, White, Set of pictograms



Classic, robust, plastic, beam-like emergency exit sign luminaire with a high level of protection and self-adhesive pictogram for versatile use.

Intended for wall mounting when used as an emergency exit sign luminaire. Without the use of pictograms, it can be used as a safety luminaire, preferably for ceiling mounting.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.

CE 5 JAHRE 5 YEARS GARANTIE WARRANTY D

More information
www.rp-group.com/en/item/KWIW413WL

TECHNICAL DATA


Luminaire type	Exit sign, Emergency light
Mounting	Wall mounting
Recognition distance	16 m
Pictograph	Set
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	Waste disposal, CE, 5 Years waranty, D-sign
Insulation class	2
Supply	Self-contained
Monitoring	Wireless Professional (WL)
Bridging time	3 h
Battery	LiFePO4 3,2 V/1,2 Ah
Operating mode	Non-maintained / maintained
Input voltage AC	230 V



RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

Input frequency	50 Hz
Power max.	5,3 W
Power maintained	4,3 W
Power non-maintained	0,7 W
Ambient temperature maintained mode	-5 °C to 35 °C
Ambient temperature non-maintained mode	-5 °C to 35 °C
Depth	86 mm
Width	390 mm
Height	99 mm
Weight	0.71
Weight incl. packaging	0.81
Connection cross-section	2.5 mm²
Switching input	Yes
Emergency light blocking	Yes
Battery connection	Connector
Dimming function	Yes
Luminous flux mains	305 lm
Luminous flux emergency	180 lm
EOF	0.59
Customs tariff number	94056120
GTIN	4260766550423

TECHNICAL DRAWING

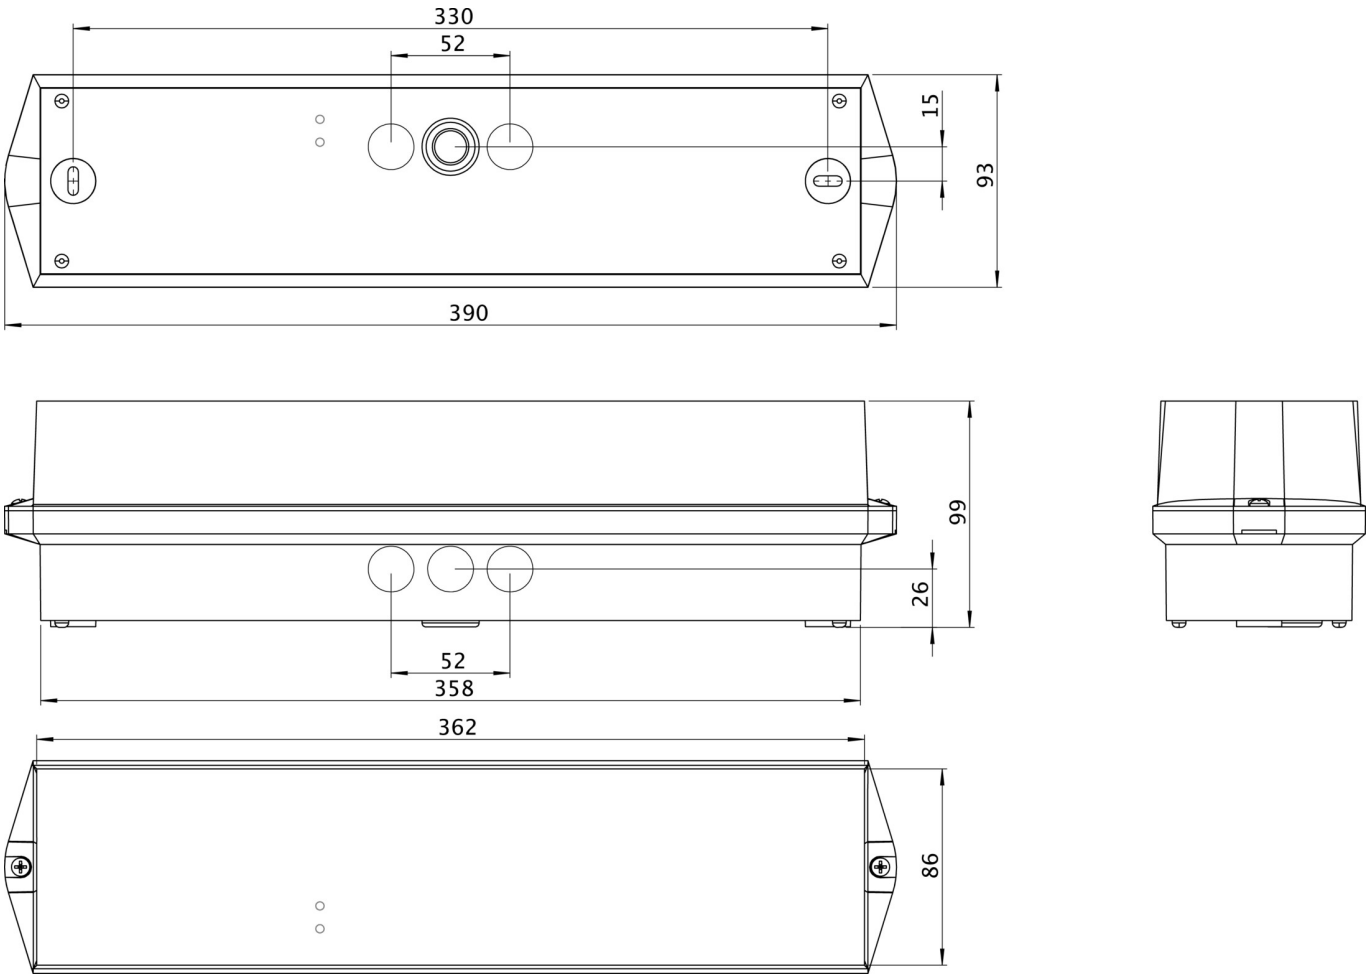

ACCESSORY LIST

BKW - Robust steel protective grille for emergency lighting

KWIE - Installation frame

LFPN3212-SET-2AKKU - Battery

RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
KWIW013SC		SelfControl (SC)	Single battery	RAL 9003	€	no	high	no	unlimited	itself
KWIW013SC-COOLIP54		SelfControl (SC)	Single battery	RAL 9003	€	no	high	no	unlimited	itself