



Art.-Nr: PFD013WL-COOLIP54

Exit sign Self-contained

**Surface mounting, Wireless Professional (WL), 3 h, 24 m,
IP65, Polycarbonate, White**

Trapezoid, plastic emergency exit sign luminaire for fitting on the ceiling for inscription on one or two sides with self-adhesive pictogram.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left and down) is supplied as standard.



More information

www.rp-group.com/en/item/PFD013WL-COOLIP54



TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Surface mounting
Recognition distance	24 m
Pictograph	Set
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	WEEE, CE, D-Sign
Insulation class	1
Supply	Self-contained
Monitoring	Wireless Professional (WL)
Bridging time	3 h
Battery	NIMH 12 V/0,8 Ah
Operating mode	Non-maintained / maintained
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	- V
Power max.	7,5 W



Power maintained	7,5 W
Power non-maintained	3,6 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	152 mm
Width	370 mm
Height	195 mm
Weight	1.23
Weight incl. packaging	1.36
Connection cross-section	2.5 mm ²
Switching input	Yes
Emergency light blocking	No
Battery connection	Clip
Dimming function	Yes
Luminous flux mains	150 lm
Luminous flux emergency	150 lm
Customs tariff number	94056120
GTIN	4260766550577



TECHNICAL DRAWING

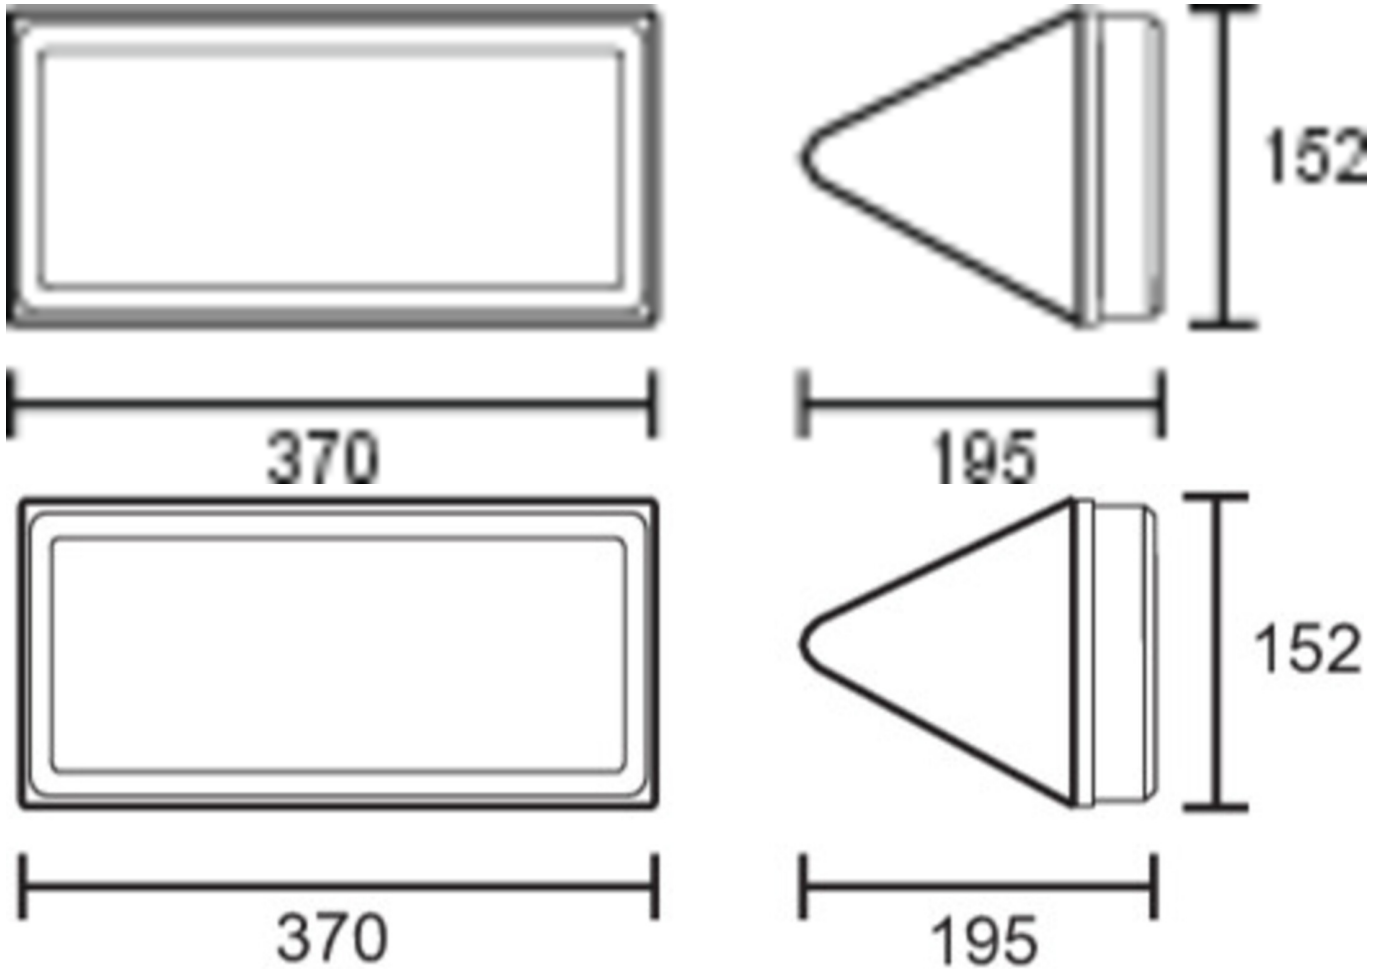

ACCESSORY LIST

2PW-EB - Pendant
2DW-EB -
DSA - Wire suspension
PFER -
NIMH1208P - Battery

As of: 05.09.2025 - Subject to technical changes and errors.