Art.-Nr: KAMU509CC
Exit sign Centralised power supply systems Universal, CoreCompact 24 (CC), CPS, 22 m, IP65, Polycarbonate, White, Set of pictograms, Universal mounting



Plastic emergency exit sign luminaire for universal mounting. The cuboid plastic housing is discreetly reduced to the essentials. The high level of protection permits use in damp rooms or highly contaminated environments.

Control and monitoring via central 24 V low-power system. Display edge luminaire with integrated light distribution for even pictogram illumination. Suited to inscription on one or two sides. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard. Universal mounting includes the option of mounting the luminaire either on the wall or ceiling.

CE


More information
www.rp-group.com/en/item/KAMU509CC

TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Universal
Recognition distance	22 m
Pictograph	Set
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	7
Certification	Waste disposal, CE
Insulation class	2
Supply	Centralised power supply systems
Monitoring	CoreCompact 24 (CC)
Bridging time	CPS
Battery	/
Operating mode	Non-maintained / maintained
Input voltage AC	24 V

Power max.	2,8 W
Power maintained	2,8 W
Power non-maintained	0,4 W
Ambient temperature maintained mode	-20 °C to 40 °C
Ambient temperature non-maintained mode	-20 °C to 40 °C
Depth	326 mm
Width	50 mm
Height	204 mm
Weight	0.08
Weight incl. packaging	0.28
Connection cross-section	2.5 mm²
Switching input	No
Emergency light blocking	No
Battery connection	No
Luminous flux mains	165 lm
Luminous flux emergency	165 lm
Customs tariff number	94056120
GTIN	4260766551550

TECHNICAL DRAWING

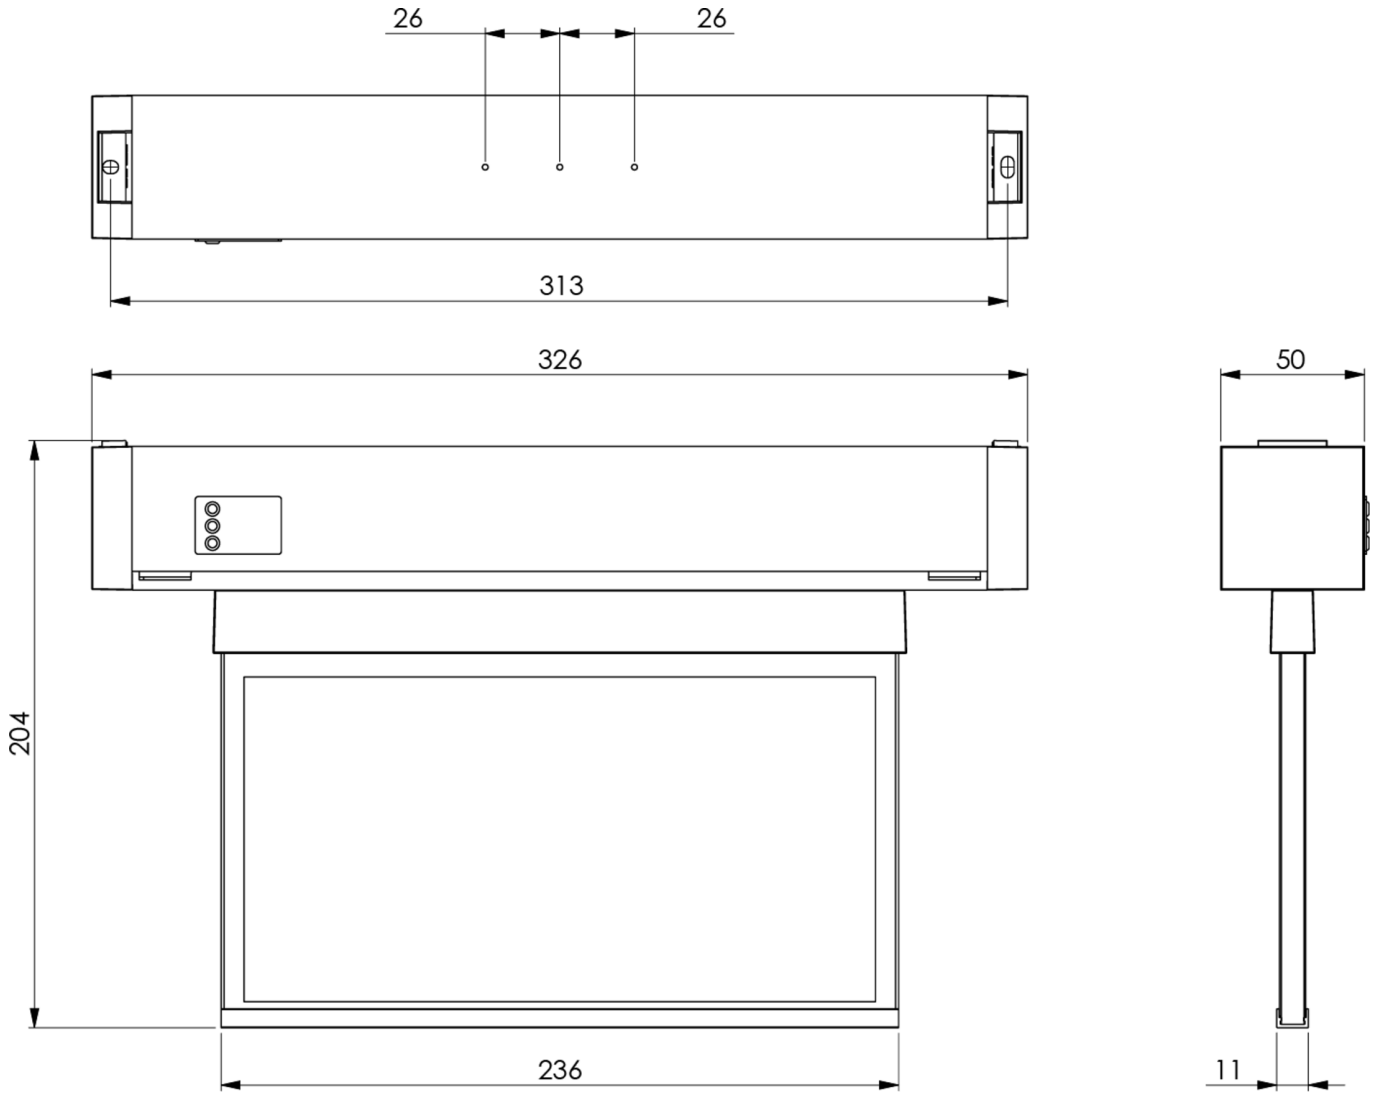

ACCESSORY LIST

AWX001 - AWX wall bracket for emergency lights - 90° flag mounting

2PW-EB - Pendant

2DW-EB - Pre-assembled designer pendant pair with fixed canopy, 4-core, white

As of: 11.11.2026 - Subject to technical changes and errors.