RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

Art.-Nr: U6E413SC
Exit sign Self-contained
Recessed wall mounting, SelfControl (SC), 3 h, 22 m, IP40, Metal, White, Set of pictograms



Metal emergency exit sign luminaire integrated into the wall.

Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.

CE

5 JAHRE 5 YEARS GARANTIE WARRANTY


More information
www.rp-group.com/en/item/U6E413SC

TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Recessed wall mounting
Recognition distance	22 m
Pictograph	Set
Illuminant	LED
Housing material	Metal
Housing color	White
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	Waste disposal, CE, 5 Years waranty
Insulation class	1
Supply	Self-contained
Monitoring	SelfControl (SC)
Bridging time	3 h
Battery	LiFePO4 3,2 V/1,2 Ah
Operating mode	Non-maintained / maintained
Input voltage AC	180 V - 230 V
Input frequency	50 Hz
Power max.	4,2 W
Power maintained	3,3 W

Power non-maintained	0,9 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	65 mm
Width	280 mm
Height	160 mm
Installation length	239 mm
Installation width	128 mm
Installation height	65 mm
Weight	1.12
Weight incl. packaging	1.39
Connection cross-section	2,5 mm²
Switching input	Yes
Emergency light blocking	No
Battery connection	Connector
Dimming function	No
Luminous flux mains	180 lm
Luminous flux emergency	180 lm
Customs tariff number	94056120
GTIN	4260766551703

TECHNICAL DRAWING

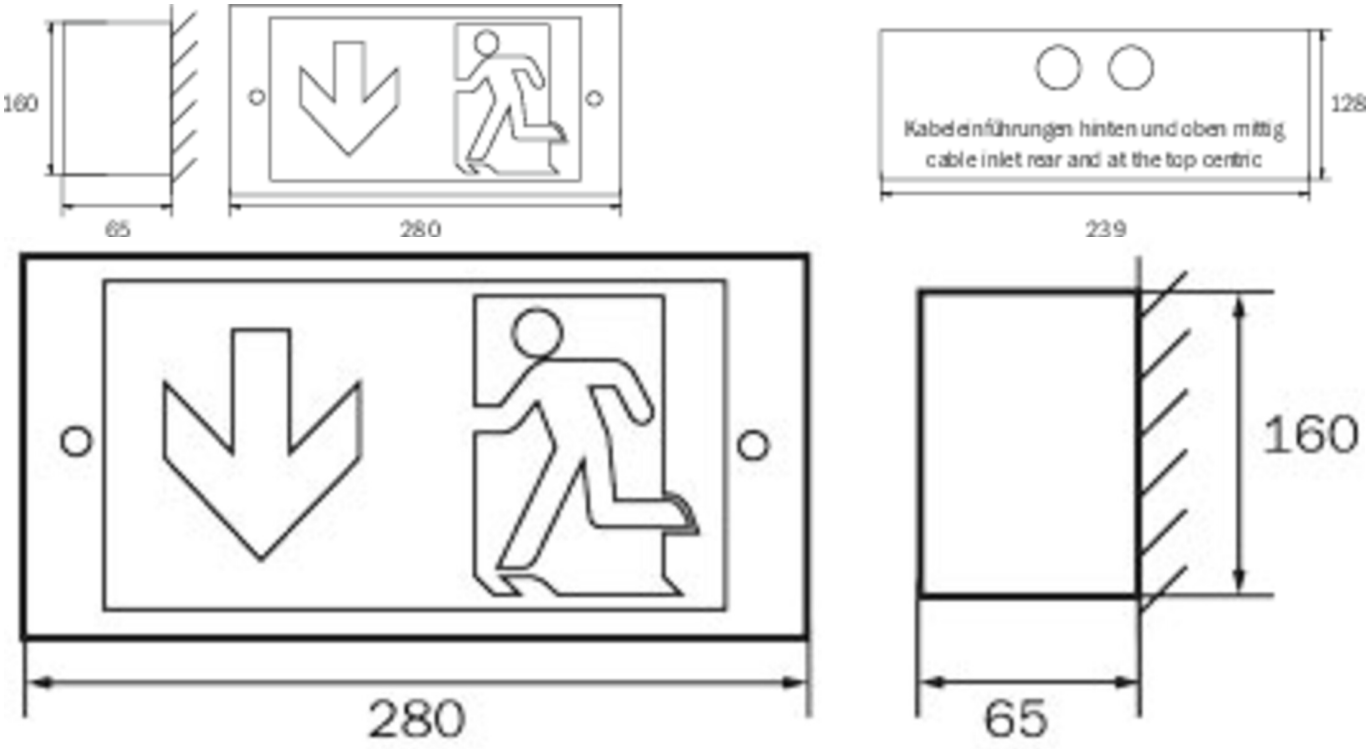

ACCESSORY LIST

U6BE - Robust steel mounting frame for U6 emergency luminaires in concrete installation

As of: 13.11.2026 - Subject to technical changes and errors.