



Art.-Nr: U6E413SC
Exit sign Self-contained
Recessed wall mounting, 3 h, 22 m, IP40, Metal, White, Set of pictograms

Metal emergency exit sign luminaire integrated into the wall.

Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information

www.rp-group.com/en/item/U6E413SC




TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Recessed wall mounting
Recognition distance	22 m
Pictograph	Set
Illuminant	LED
Housing material	Metal
Housing color	White
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	WEEE, CE, 5 years warranty
Insulation class	1
Supply	Self-contained
Monitoring	SelfControl (SC)
Bridging time	3 h
Battery	LiFePO4 3,2 V/1,2 Ah
Operating mode	Non-maintained / maintained
Input voltage AC	180 V - 230 V
Input frequency	50 Hz
Power non-maintained	0,9 W
Ambient temperature maintained mode	-5 °C to 40 °C



Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	65 mm
Width	280 mm
Height	160 mm
Installation length	239 mm
Installation width	128 mm
Installation height	65 mm
Weight	1.12
Weight incl. packaging	1.39
Connection cross-section	2,5 mm ²
Switching input	Yes
Emergency light blocking	No
Battery connection	Connector
Dimming function	No
Customs tariff number	94056120
GTIN	4260766551703

TECHNICAL DRAWING

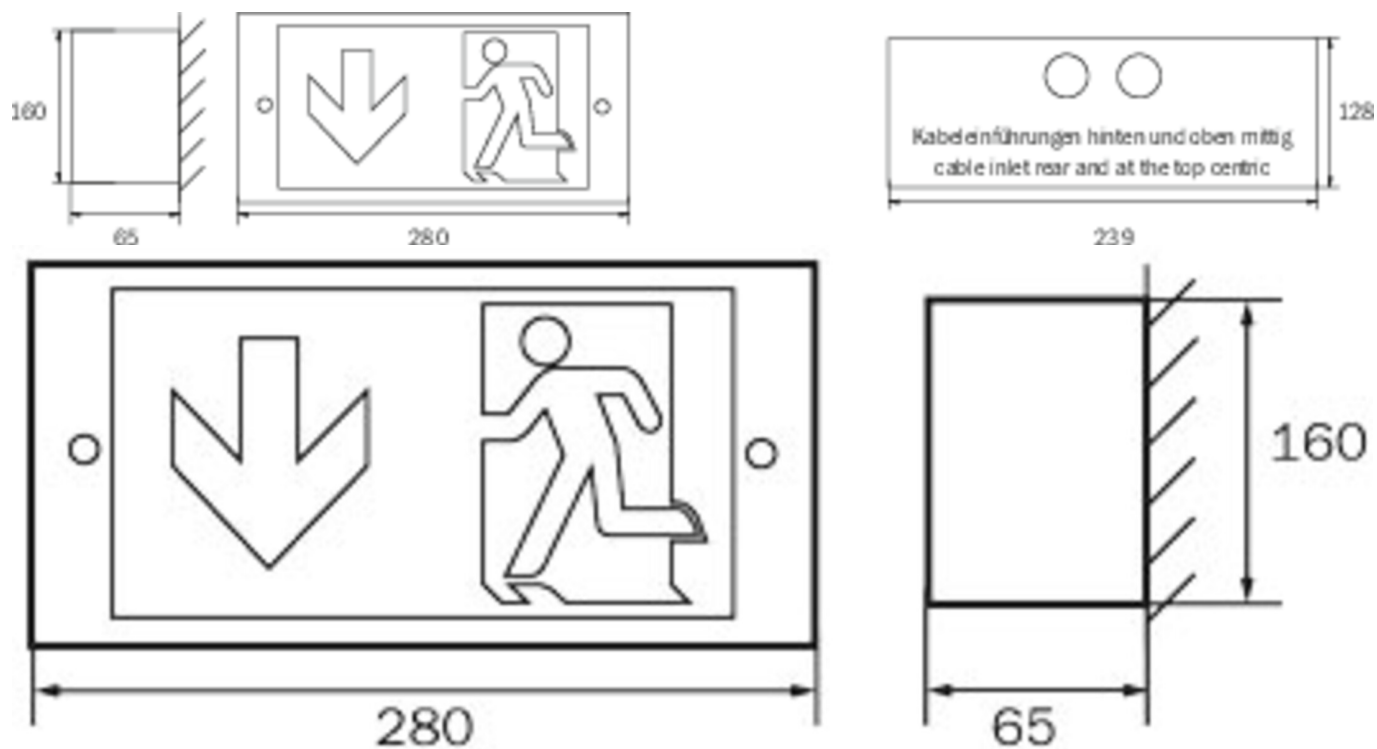



ACCESSORY LIST

U6BE - Robust steel mounting frame for U6 emergency luminaires in concrete installation

As of: 24.08.2026 - Subject to technical changes and errors.