RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

Art.-Nr: PMD509CC
Exit sign Centralised power supply systems Surface mounting, CoreCompact 24 (CC), CPS, 20 m, IP65, Polycarbonate, White, Set of pictograms



Polycarbontate emergency exit sign luminaire with trapezoid surround.

To help with mounting, levelling screws are integrated to compensate for uneven surfaces.

The luminaire can be mounted by fitting on the wall and ceiling as well as fitting in the ceiling in conjunction with the mounting frame available.

The set of pictograms is inserted on the inside and secured without the use of solvents.

Control and monitoring via central 24 V low-power system. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (2x man in the door and 2 straight arrows) are supplied as standard.


More information
www.rp-group.com/en/item/PMD509CC


TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Surface mounting
Recognition distance	20 m
Pictograph	Set
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	Waste disposal, CE, D-sign, HACCP (food law conformity)
Insulation class	2
Supply	Centralised power supply systems
Monitoring	CoreCompact 24 (CC)
Bridging time	CPS
Battery	/

Operating mode	Non-maintained / maintained
Input voltage AC	24 V
Power max.	2,8 W
Power maintained	2,8 W
Power non-maintained	0,4 W
Ambient temperature maintained mode	-20 °C to 40 °C
Ambient temperature non-maintained mode	-20 °C to 40 °C
Depth	168 mm
Width	236 mm
Height	136 mm
Weight	0.87
Weight incl. packaging	0.97
Connection cross-section	2.5 mm²
Switching input	No
Emergency light blocking	No
Battery connection	No
Customs tariff number	94056120
GTIN	4260766552021

TECHNICAL DRAWING

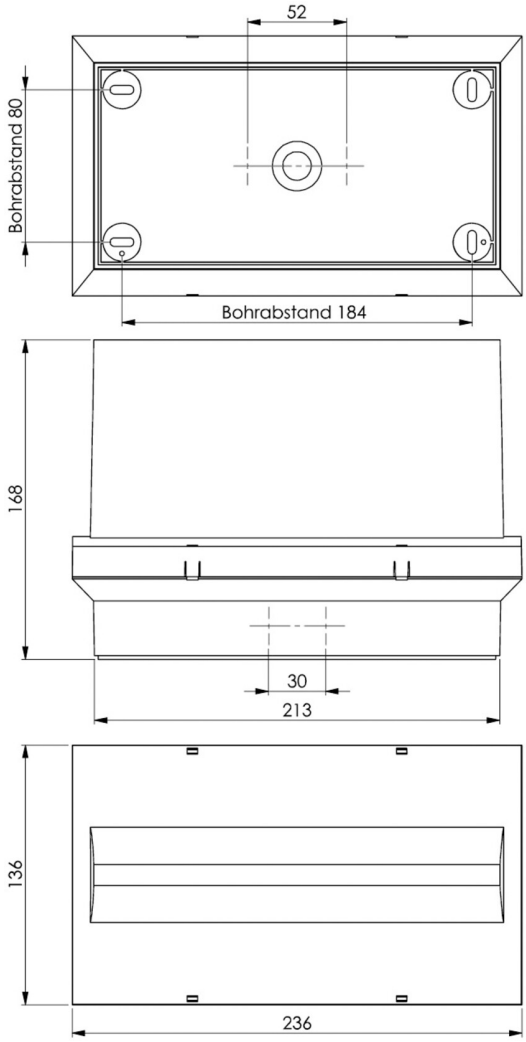



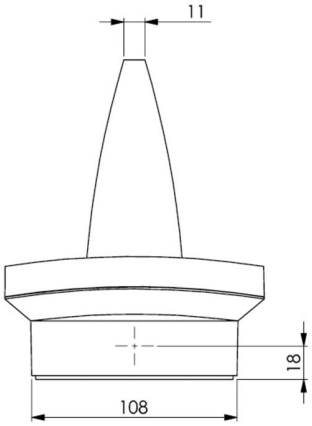

ACCESSORY LIST

PME - Professional module housing for sophisticated electrical engineering

PM-PIKTOSETSONDER.01 -

As of: 07.11.2026 - Subject to technical changes and errors.