



**Art.-Nr: PMW509CC**

**Exit sign Centralised power supply systems**

**Wall mounting, CPS, 20 m, IP65, Polycarbonate, White, Set of pictograms**

Polycarbonate LED emergency exit sign luminaire with convex shaped cover for wall mounting.

To help with mounting, levelling screws are integrated to compensate for uneven surfaces.

The set of pictograms is inserted on the inside and secured without the use of solvents.

Control and monitoring via central 24 V low-power system. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (2x man in the door and 2 straight arrows) are supplied as standard.



More information

[www.rp-group.com/en/item/PMW509CC](http://www.rp-group.com/en/item/PMW509CC)



## TECHNICAL DATA


|                        |                                  |
|------------------------|----------------------------------|
| Luminaire type         | Exit sign                        |
| Mounting               | Wall mounting                    |
| Recognition distance   | 20 m                             |
| Pictograph             | Set                              |
| Illuminant             | LED                              |
| Housing material       | Polycarbonate                    |
| Housing color          | White                            |
| Protection type (IP)   | IP65                             |
| Impact resistance (IK) | 6                                |
| Certification          | WEEE, CE, D-Sign, HACCP          |
| Insulation class       | 2                                |
| Supply                 | Centralised power supply systems |
| Monitoring             | CoreCompact 24 (CC)              |
| Bridging time          | CPS                              |
| Battery                | /                                |
| Operating mode         | Non-maintained / maintained      |



|                                         |                     |
|-----------------------------------------|---------------------|
| Input voltage AC                        | 24 V                |
| Power max.                              | 2,8 W               |
| Power maintained                        | 2,8 W               |
| Power non-maintained                    | 0,4 W               |
| Ambient temperature maintained mode     | -20 °C to 40 °C     |
| Ambient temperature non-maintained mode | -20 °C to 40 °C     |
| Depth                                   | 65 mm               |
| Width                                   | 236 mm              |
| Height                                  | 136 mm              |
| Weight                                  | 0.6                 |
| Weight incl. packaging                  | 0.73                |
| Connection cross-section                | 2.5 mm <sup>2</sup> |
| Switching input                         | No                  |
| Emergency light blocking                | No                  |
| Battery connection                      | No                  |
| Customs tariff number                   | 94056120            |
| GTIN                                    | 4260766552007       |



## TECHNICAL DRAWING

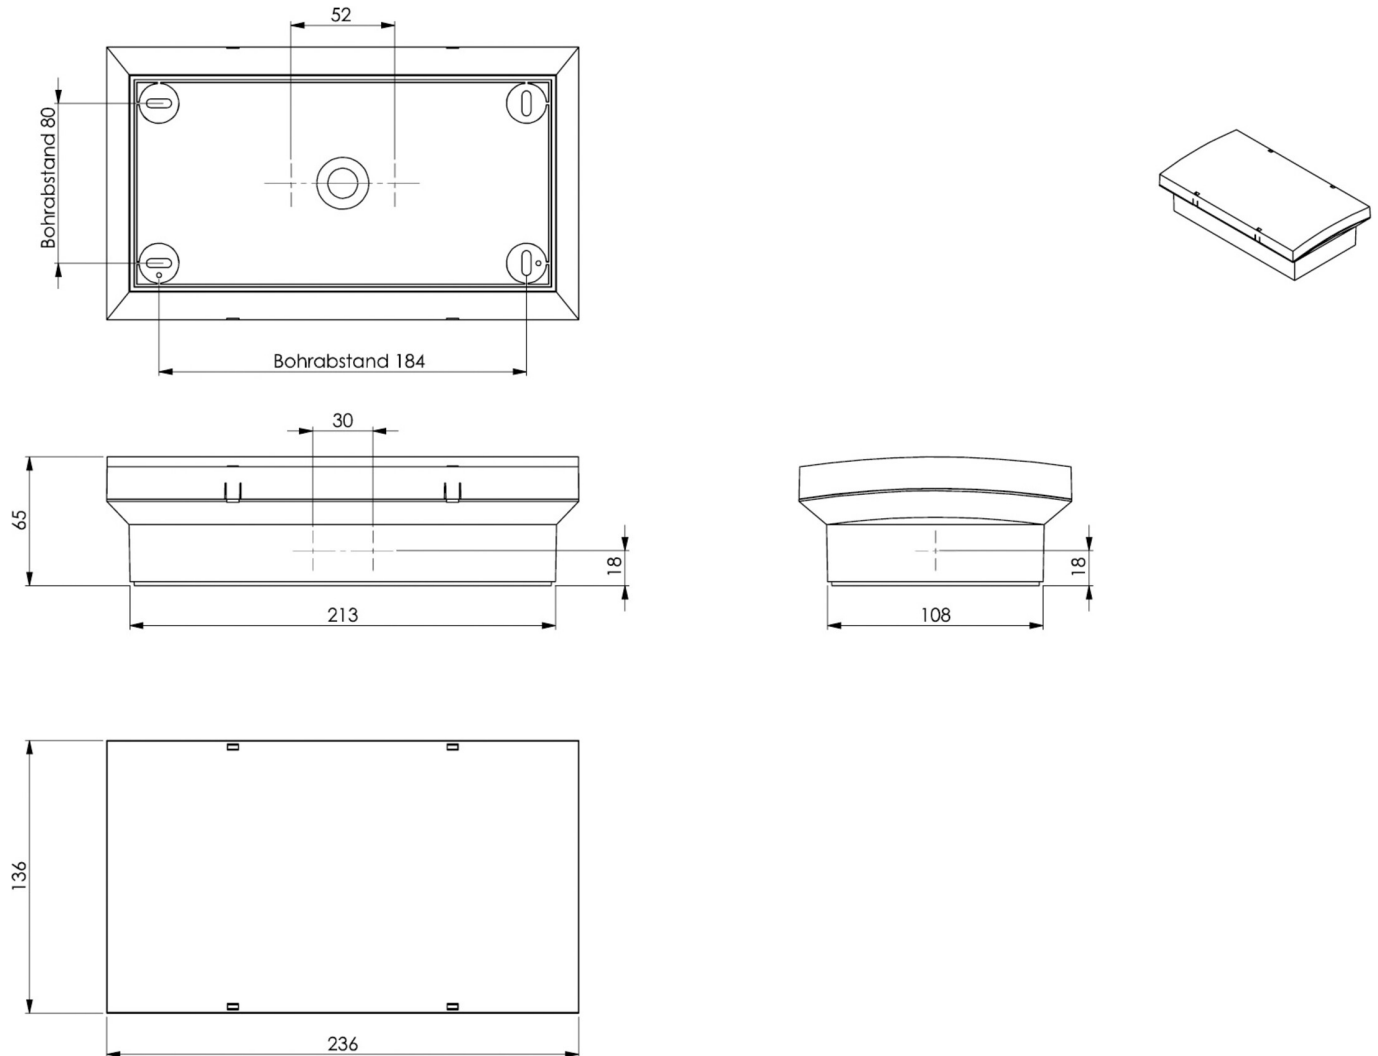

## ACCESSORY LIST

PME - Professional module housing for sophisticated electrical engineering

PM-PIKTOSETSONDER.01 -

As of: 24.08.2026 - Subject to technical changes and errors.