
RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

# Art.-Nr: KWIW421SC
# Emergency light Self-contained Universal, SelfControl (SC), 1 h, IP65, Polycarbonate, White, Flexiklick

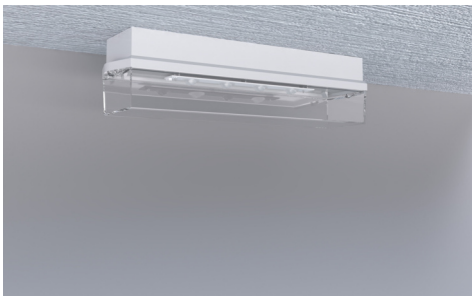

Classic, robust, plastic, beam-like safety luminaire with a high level of protection and for versatile use.

Automatic monitoring of safety luminaire with SelfControl. The luminaire is fitted with the innovative flexible plug-in system for rapid use of the right lens. The corridor lens is supplied with every luminaire. A round lens, spotlight lens and beam lens are available as options.


More information
www.rp-group.com/en/item/KWIW421SC

## TECHNICAL DATA

| | |
|---|---|
| Luminaire type | Emergency light |
| Mounting | Universal |
| Pictograph | No |
| Illuminant | LED |
| Housing material | Polycarbonate |
| Housing color | White |
| Protection type (IP) | IP65 |
| Impact resistance (IK) | 6 |
| Certification | Waste disposal, CE, 5 Years waranty, D-sign |
| Insulation class | 2 |
| Supply | Self-contained |
| Monitoring | SelfControl (SC) |
| Bridging time | 1 h |
| Battery | LiFePO4 3,2 V/1,6 Ah |
| Operating mode | Non-maintained / maintained |
| Input voltage AC | 180 V - 250 V |
| Input frequency | 50 Hz |
| Power max. | 6,4 W |
| Power maintained | 5,6 W |
| Power non-maintained | 2 W |

| | |
|---|---|
| Ambient temperature maintained mode | -5 °C to 40 °C |
| Ambient temperature non-maintained mode | -5 °C to 40 °C |
| Depth | 86 mm |
| Width | 390 mm |
| Height | 99 mm |
| Weight | 0.75 |
| Weight incl. packaging | 0.85 |
| Connection cross-section | 2,5 mm² |
| Switching input | Yes |
| Emergency light blocking | No |
| Battery connection | Connector |
| Dimming function | No |
| Luminous flux mains | 520 lm |
| Luminous flux emergency | 520 lm |
| Customs tariff number | 94056120 |
| GTIN | 4260766553455 |

## TECHNICAL DRAWING

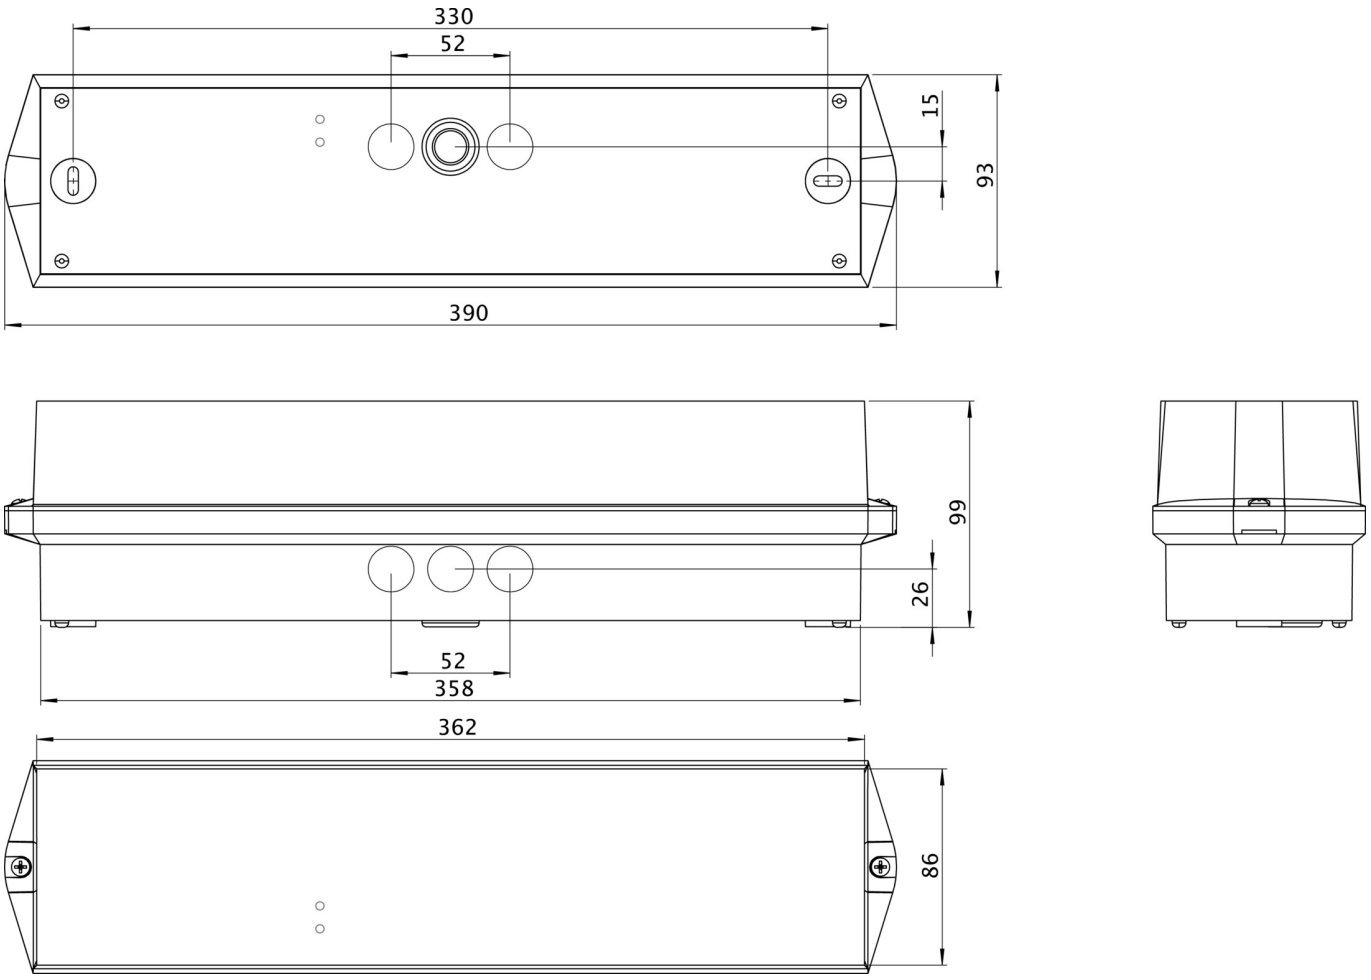


## ACCESSORY LIST

BKW - Robust steel protective grille for emergency lighting

KWIE - Installation frame

As of: 15.11.2026 - Subject to technical changes and errors.