RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

# Art.-Nr: AGCC401SC-E
# Exit sign Self-contained
# Rope ceiling installation, SelfControl (SC), 1 h, 50m, IP20, Zinc die-cast, Stainless steel, Piktogram as reqired



Modern zinc die-cast emergency exit sign luminaire with wire suspension for recessed mounting in the ceiling. Escape and emergency routes can be identified on either one or two sides.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Automatic monitoring of safety luminaire with SelfControl. Two requested pictograms (arrow to the right, left, up, down or white) are supplied as standard.

CE

5 JAHRE 5 YEARS GARANTIE WARRANTY


More information
www.rp-group.com/en/item/AGCC401SC-E


## TECHNICAL DATA

| | |
|---|---|
| Luminaire type | Exit sign |
| Mounting | Rope ceiling installation |
| Recognition distance | 50m |
| Pictograph | acc. to Specification |
| Illuminant | LED |
| Housing material | Zinc die-cast |
| Housing color | Stainless steel |
| Protection type (IP) | IP20 |
| Impact resistance (IK) | ≥ 3 |
| Certification | Waste disposal, CE, 5 Years waranty |
| Insulation class | 2 |
| Supply | Self-contained |
| Monitoring | SelfControl (SC) |
| Bridging time | 1 h |
| Battery | LiFePO4 3,2 V/1,2 Ah |
| Operating mode | Non-maintained / maintained |
| Input voltage AC | 230 V - 240 V |
| Input frequency | 50 Hz |

| | |
|---|---|
| Power max. | 4,2 W |
| Power maintained | 3,3 W |
| Power non-maintained | 0,9 W |
| Ambient temperature maintained mode | -5 °C to 40 °C |
| Ambient temperature non-maintained mode | -5 °C to 40 °C |
| Depth | 79 mm |
| Width | 512 mm |
| Height | 309 mm |
| Installation length | 176 mm |
| Installation width | 68 mm |
| Installation height | 40 mm |
| Weight | 2.51 |
| Weight incl. packaging | 3.16 |
| Connection cross-section | 2,5 mm² |
| Switching input | Yes |
| Emergency light blocking | No |
| Battery connection | Connector |
| Dimming function | No |
| Customs tariff number | 94056180 |
| GTIN | 4260766553936 |

## TECHNICAL DRAWING

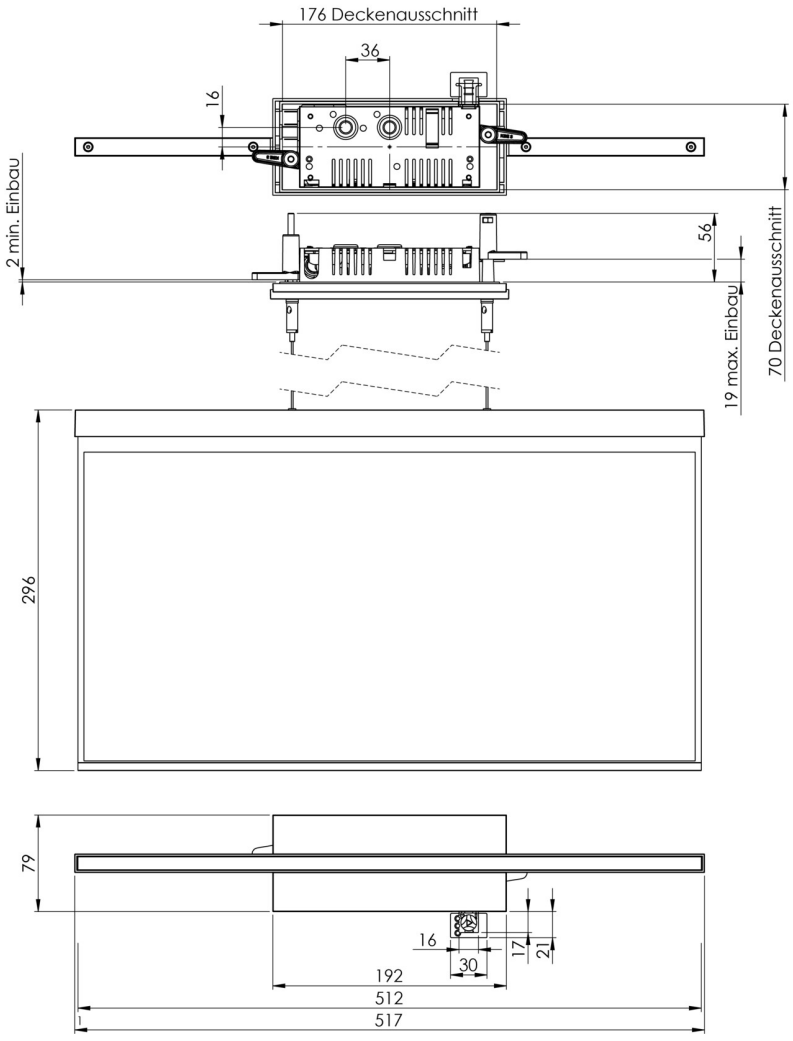

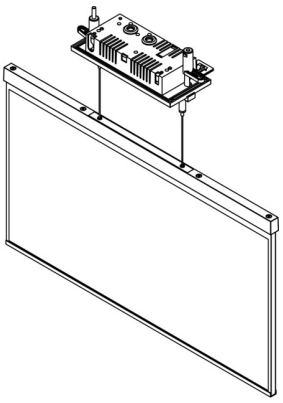As of: 22.11.2026 - Subject to technical changes and errors.