RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

# Art.-Nr: AXD403SC-AZ
# Exit sign Self-contained
# Surface mounting, SelfControl (SC), 3 h, 30 m, IP40, Zinc die-cast, Anthracite, Set of pictograms



Modern zinc die-cast emergency exit sign luminaire for surface mounting on the ceiling. Escape and emergency routes can be identified on either one or two sides.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.

CE 5 JAHRE 5 YEARS GARANTIE WARRANTY RoHS

More information
www.rp-group.com/en/item/AXD403SC-AZ

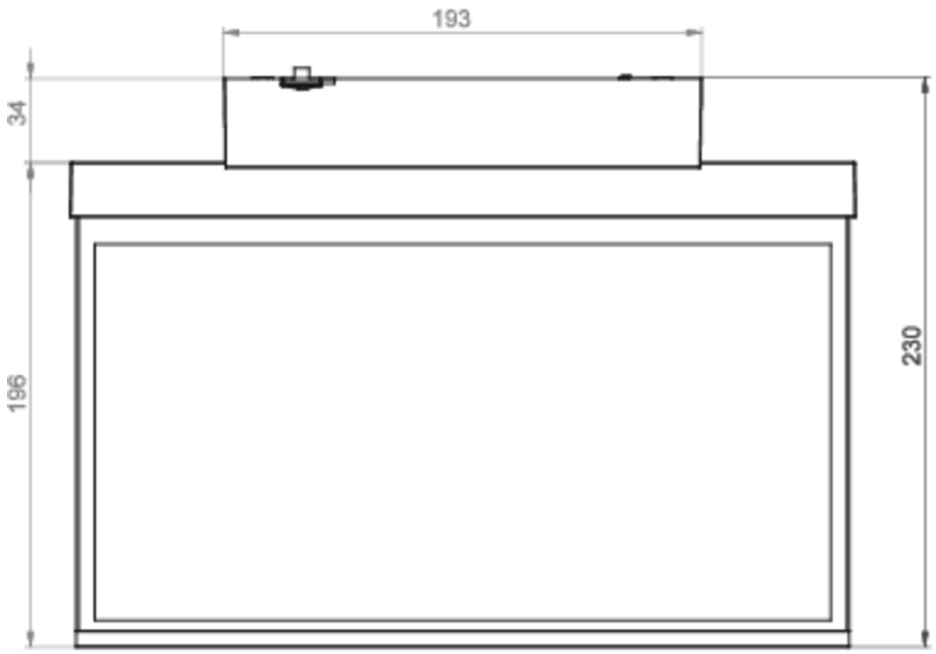
## TECHNICAL DATA

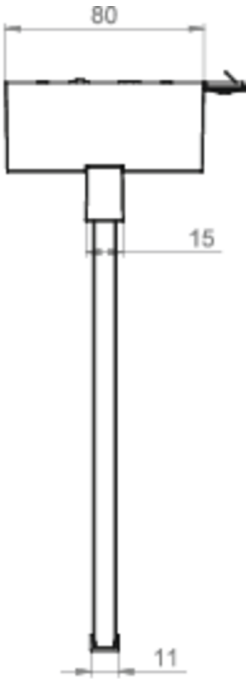
| | |
|---|---|
| Luminaire type | Exit sign |
| Mounting | Surface mounting |
| Recognition distance | 30 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | Zinc die-cast |
| Housing color | Anthracite |
| Protection type (IP) | IP40 |
| Impact resistance (IK) | ≥ 3 |
| Certification | Waste disposal, CE, RoHS, 5 Years waranty |
| Insulation class | 2 |
| Supply | Self-contained |
| Monitoring | SelfControl (SC) |
| Bridging time | 3 h |
| Battery | LiFePO4 3,2 V/1,2 Ah |
| Operating mode | Non-maintained / maintained |
| Input voltage AC | 180 V - 250 V |

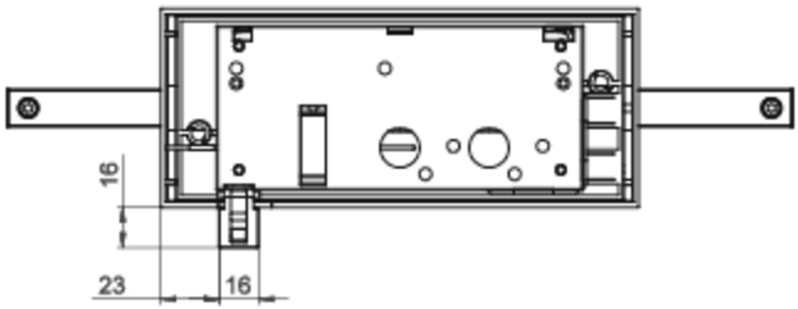
| | |
|---|---|
| Input frequency | 50 Hz |
| Power max. | 4,2 W |
| Power maintained | 3,3 W |
| Power non-maintained | 0,9 W |
| Ambient temperature maintained mode | -5 °C to 40 °C |
| Ambient temperature non-maintained mode | -5 °C to 40 °C |
| Depth | 80 mm |
| Width | 312 mm |
| Height | 228 mm |
| Weight | 1.79 |
| Weight incl. packaging | 2.28 |
| Connection cross-section | 2,5 mm² |
| Switching input | Yes |
| Emergency light blocking | No |
| Battery connection | Connector |
| Dimming function | No |
| Customs tariff number | 94056180 |
| GTIN | 4260766555398 |

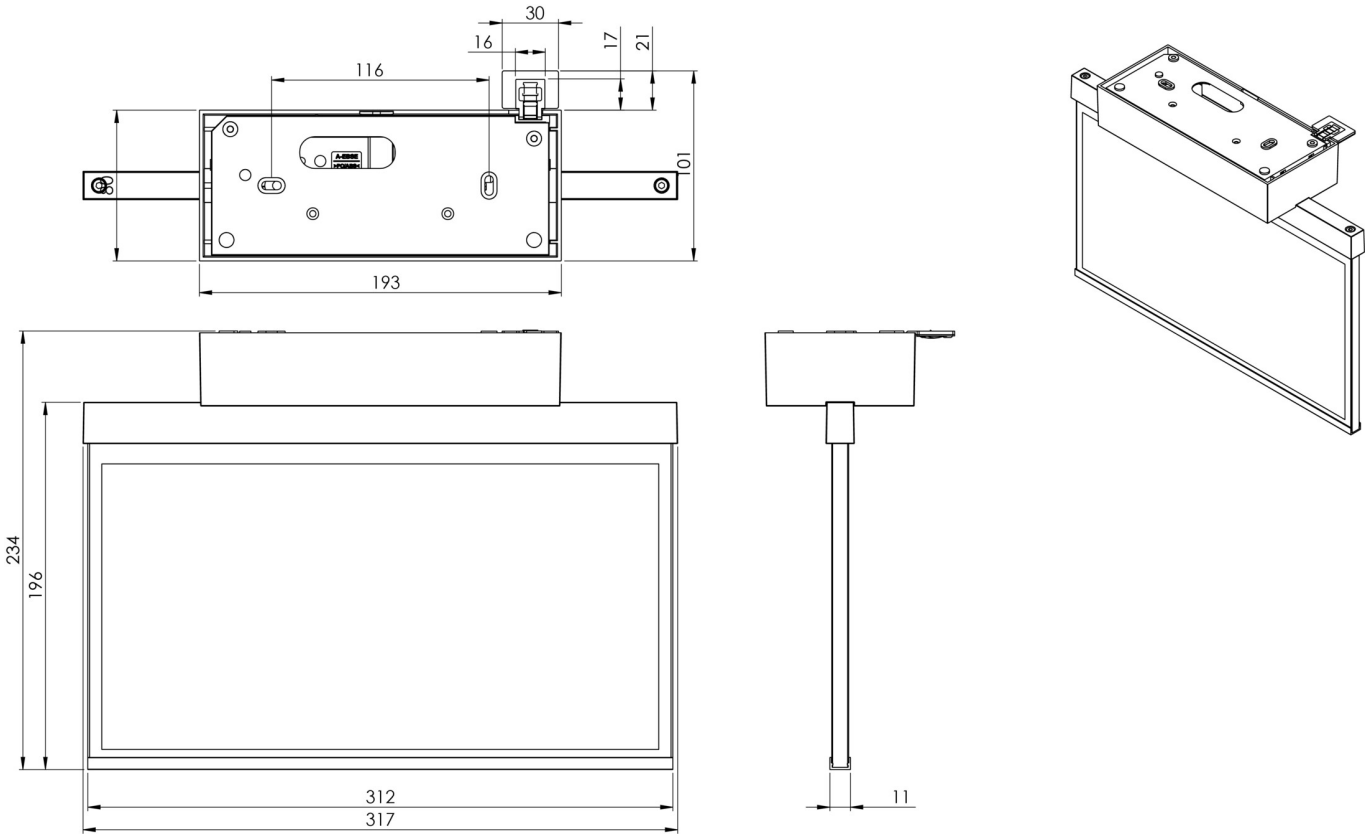
RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

## TECHNICAL DRAWING


193
34
196
230


80
15
11


16
23
16




## ACCESSORY LIST

AM-X-APA - Surface-mounted/intermediate housing

As of: 02.11.2026 - Subject to technical changes and errors.