Art.-Nr: WFXW411SC
Exit sign Self-contained
Wall mounting, SelfControl (SC), 1 h, 30 m, IP65, Polycarbonate, White, Piktogram as reqired



Modern exit sign wall luminaire in a square format.

For marking escape and rescue routes. Optionally, the light can be used to mark other adjacent rooms, such as showers, restrooms, or changing rooms.

The easy-to-install bayonet lock allows for safe opening and closing of the light. It also ensures a high protection rating, making the light versatile and flexible.

Automatic monitoring of safety luminaire with SelfControl. The requested pictogram (arrow to the right, left, up or down) is supplied as standard.

More information
www.rp-group.com/en/item/WFXW411SC

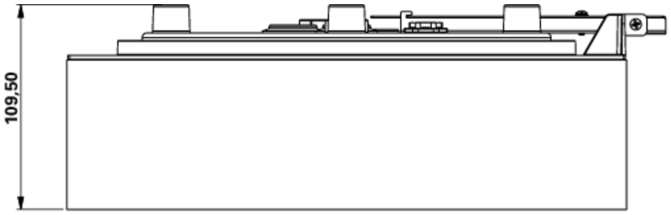
TECHNICAL DATA

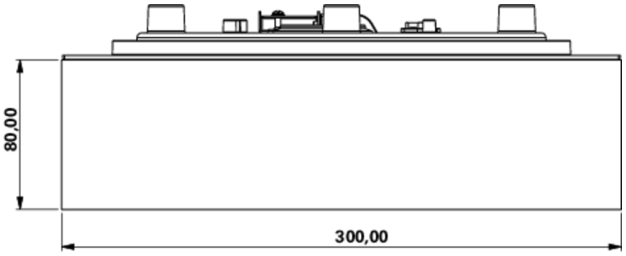
Luminaire type	Exit sign
Mounting	Wall mounting
Recognition distance	30 m
Pictograph	acc. to Specification
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	4
Certification	Waste disposal, CE, 5 Years waranty, D-sign
Insulation class	2
Supply	Self-contained
Monitoring	SelfControl (SC)
Bridging time	1 h
Battery	LiFePO4 3,2 V/1,6 Ah
Operating mode	Non-maintained / maintained
Input voltage AC	180 V - 250 V
Input frequency	50 Hz

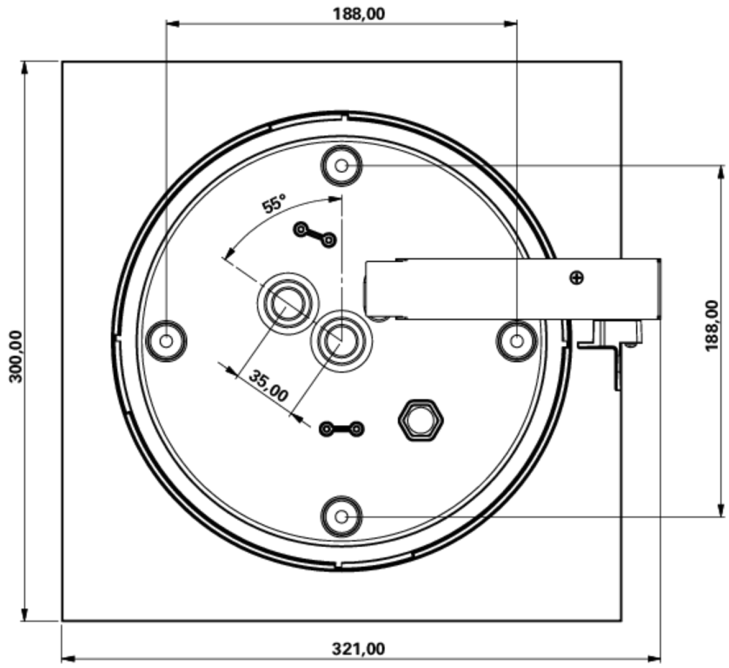
Power max.	6,4 W
Power maintained	5,6 W
Power non-maintained	2 W
Ambient temperature maintained mode	0 °C to 40 °C
Ambient temperature non-maintained mode	0 °C to 40 °C
Depth	300 mm
Width	300 mm
Height	110 mm
Weight	1.42
Weight incl. packaging	1.67
Connection cross-section	2,5 mm²
Switching input	Yes
Emergency light blocking	No
Battery connection	Connector
Dimming function	No
Customs tariff number	94056120
GTIN	4260766556753

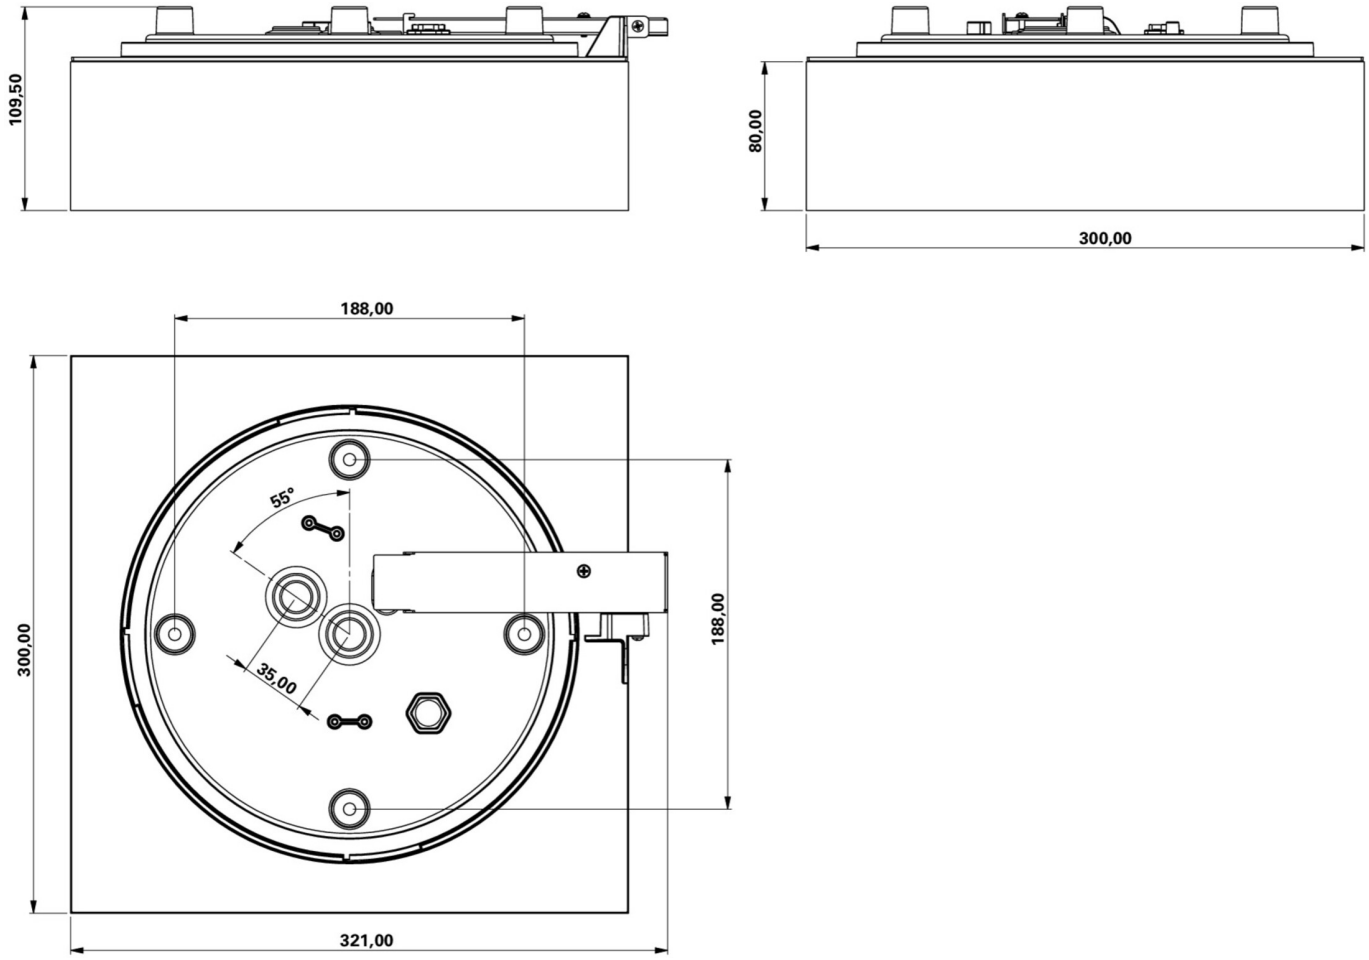
RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

TECHNICAL DRAWING


109,50


80,00
300,00


188,00
300,00
55°
35,00
188,00
321,00



ACCESSORY LIST

LFP3216-SET-2AKKU - Battery

As of: 13.11.2026 - Subject to technical changes and errors.