RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

# Art.-Nr: KEU413SC
# Emergency light Self-contained Universal, SelfControl (SC), 3 h, IP40, Polycarbonate, White, Flexiklick



Compact plastic safety luminaire for universal mounting for illuminating escape and emergency routes.

Universal mounting includes fitting on the wall and ceiling as well as the option of fitting in the ceiling in conjunction with the mounting frame available.

Automatic monitoring of safety luminaire with SelfControl. The luminaire is fitted with the innovative flexible plug-in system for rapid use of the right lens. The corridor lens is supplied with every luminaire. A round lens, spotlight lens and beam lens are available as options.

CE

5 JAHRE 5 YEARS GARANTIE WARRANTY

More information
www.rp-group.com/en/item/KEU413SC

## TECHNICAL DATA

| | |
|---|---|
| Luminaire type | Emergency light |
| Mounting | Universal |
| Pictograph | No |
| Illuminant | LED |
| Housing material | Polycarbonate |
| Housing color | White |
| Protection type (IP) | IP40 |
| Impact resistance (IK) | ≥ 3 |
| Certification | Waste disposal, CE, 5 Years waranty |
| Insulation class | 2 |
| Supply | Self-contained |
| Monitoring | SelfControl (SC) |
| Bridging time | 3 h |
| Battery | LiFePO4 3,2 V/3,3 Ah |
| Operating mode | Non-maintained / maintained |
| Input voltage AC | 230 V - 240 V |
| Input frequency | 50 Hz |
| Power max. | 6,9 W |

| | |
|---|---|
| Power maintained | 5,7 W |
| Power non-maintained | 2 W |
| Ambient temperature maintained mode | -5 °C to 40 °C |
| Ambient temperature non-maintained mode | -5 °C to 40 °C |
| Depth | 332 mm |
| Width | 48 mm |
| Height | 72 mm |
| Weight | 0.44 |
| Weight incl. packaging | 0.48 |
| Connection cross-section | 2,5 mm² |
| Switching input | Yes |
| Emergency light blocking | No |
| Battery connection | Connector |
| Dimming function | No |
| Luminous flux mains | 320 lm |
| Luminous flux emergency | 320 lm |
| Customs tariff number | 94056120 |
| GTIN | 4260766557460 |

## TECHNICAL DRAWING

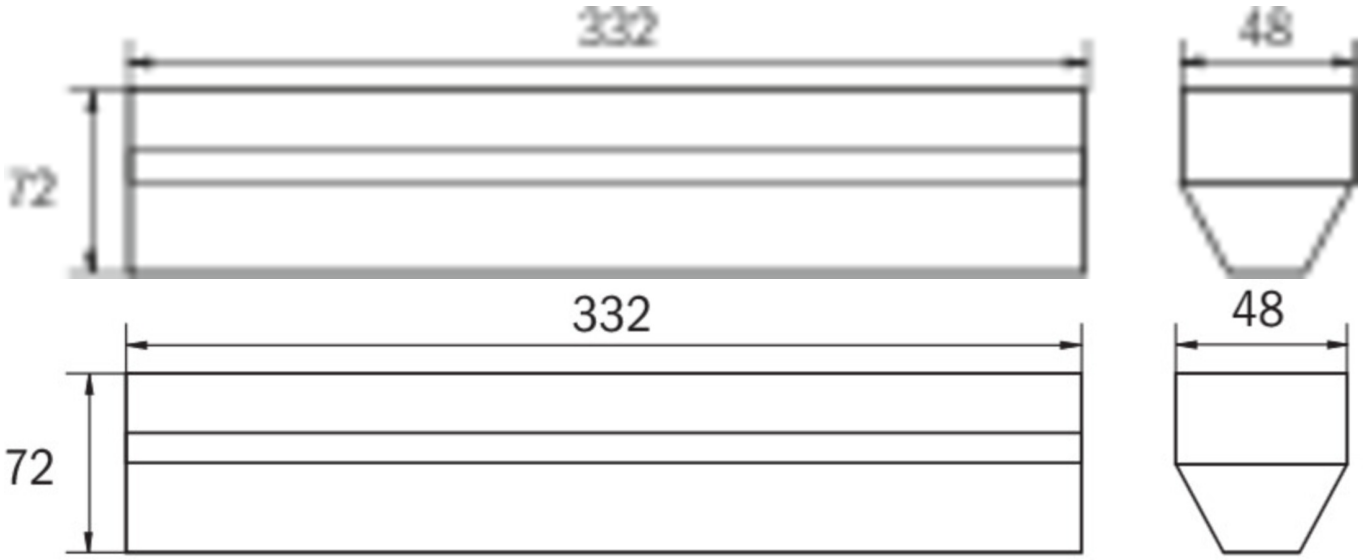

## ACCESSORY LIST

DSA - Wire suspension

KEE-EB - Installation frame for KE emergency lights - For discreet ceiling integration

2PW-EB - Pendant

2DW-EB - Pre-assembled designer pendant pair with fixed canopy, 4-core, white

KXBE - Concrete installation box for ceiling formwork installation for emergency lighting

LFP3233-SET-2AKKU - Battery