



Art.-Nr: KXU411SC
Exit sign Self-contained
Universal, 1 h, 30 m, IP40, Polycarbonate, White, Set of
pictograms, Universal mounting

Innovative plastic emergency exit sign luminaire for universal mounting, in a conically tapering housing producing an appealing look. Suited to inscription on one or two sides.



Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard. Universal mounting includes fitting on the wall and ceiling as well as the option of fitting in the ceiling in conjunction with the mounting frame available.



More information

www.rp-group.com/en/item/KXU411SC



TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Universal
Recognition distance	30 m
Pictograph	Set
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	WEEE, CE, 5 years warranty
Insulation class	2
Supply	Self-contained
Monitoring	SelfControl (SC)
Bridging time	1 h
Battery	LiFePO4 3,2 V/1,6 Ah
Operating mode	Non-maintained / maintained



Input voltage AC	180 V - 230 V
Input frequency	50 Hz
Power max.	4,2 W
Power maintained	3,3 W
Power non-maintained	0,9 W
Ambient temperature maintained mode	-5 °C to 35 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	48 mm
Width	332 mm
Height	242 mm
Weight	0.9
Weight incl. packaging	1.01
Connection cross-section	2,5 mm ²
Switching input	Yes
Emergency light blocking	No
Battery connection	Connector
Dimming function	No
Luminous flux mains	190 lm
Luminous flux emergency	190 lm
Customs tariff number	94056120
GTIN	4260766557415




Technical drawings of the 'EXIT' sign, showing front and side views with dimensions.

Front View (Top): The sign is rectangular with a total width of 332 and a total height of 242. It features a top section with two horizontal lines, a central panel with a downward arrow and a running figure, and a bottom section with a width of 312 and a height of 170. The top section has a height of 72.

Side View (Top): The sign has a total width of 48 and a total height of 10. It features a top section with a width of 48 and a height of 10, and a bottom section with a width of 10 and a height of 10.

Front View (Bottom): The sign is rectangular with a total width of 332 and a total height of 242. It features a top section with two horizontal lines, a central panel with a downward arrow and a running figure, and a bottom section with a width of 312 and a height of 170. The top section has a height of 72.

Side View (Bottom): The sign has a total width of 48 and a total height of 10. It features a top section with a width of 48 and a height of 10, and a bottom section with a width of 10 and a height of 10.

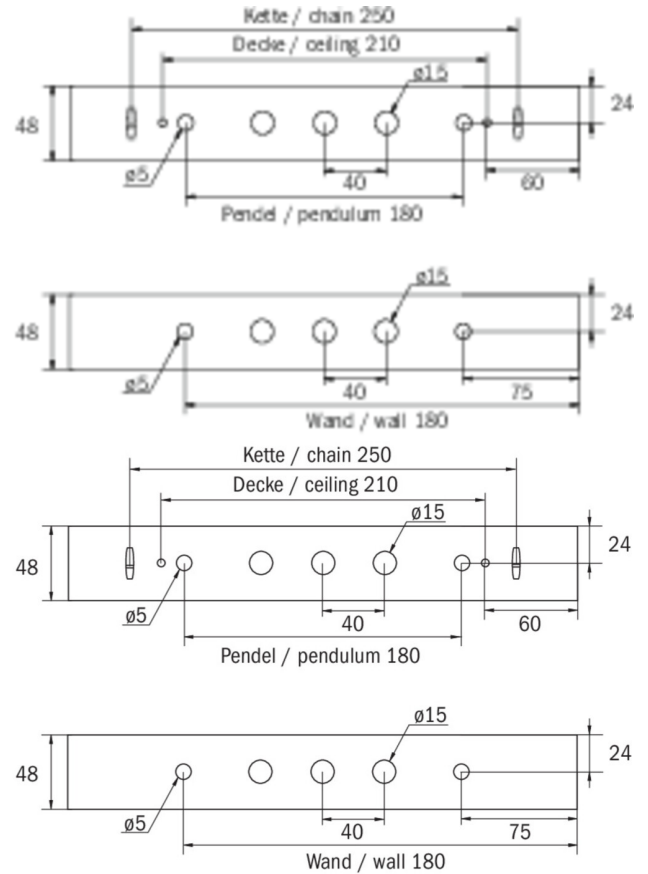

KXE-EB - Installation frame for KX emergency lights: Elegant recessed wall mounting
AWX001 - AWX wall bracket for emergency lights - 90° flag mounting
DSA - Wire suspension
2PW-EB - Pendant
2DW-EB - Pre-assembled designer pendant pair with fixed canopy, 4-core, white
KXBE - Concrete installation box for ceiling formwork installation for emergency lighting
LFP3216-SET-2AKKU - Battery

www.rp-group.com