



**Art.-Nr: ZPMR029ML**

**Emergency light, General light Centralised power supply systems  
soil structure, CPS, IP65, Zinc die-cast, Anthracite**

The bollard light has a smooth cylindrical body with no protruding parts. It is made of die-cast aluminum with an anthracite surface. The light outlet is made of robust, transparent polycarbonate and enables even light distribution around the lamp.

The luminaire is particularly suitable for illuminating outside areas, as well as escape and rescue routes outside the building to a safe area.

The color temperature is set to 3200K and can be changed to 2700K or 4000K on the lamp.

Control and monitoring via central power supply system.



More information  
[www.rp-group.com/en/item/ZPMR029ML](http://www.rp-group.com/en/item/ZPMR029ML)



## TECHNICAL DATA


|                        |                                  |
|------------------------|----------------------------------|
| Luminaire type         | Emergency light, General light   |
| Mounting               | soil structure                   |
| Pictograph             | No                               |
| Illuminant             | LED                              |
| Housing material       | Zinc die-cast                    |
| Housing color          | Anthracite                       |
| Protection type (IP)   | IP65                             |
| Impact resistance (IK) | 10                               |
| Certification          | WEEE, CE                         |
| Insulation class       | 1                                |
| Supply                 | Centralised power supply systems |
| Monitoring             | Central power supply (ML)        |
| Bridging time          | CPS                              |
| Battery                | /                                |
| Operating mode         | Non-maintained / maintained      |
| Input voltage AC       | 230 V                            |



|                                         |                 |
|-----------------------------------------|-----------------|
| Input frequency                         | 50 / 60 Hz      |
| Input voltage DC                        | 216 V           |
| Power max.                              | 11,5 W          |
| Power maintained                        | 11,5 W          |
| Power non-maintained                    | 1,5 W           |
| Ambient temperature maintained mode     | -20 °C to 50 °C |
| Ambient temperature non-maintained mode | -20 °C to 50 °C |
| Height                                  | 800 mm          |
| Diameter                                | 160 mm          |
| Weight                                  | 7               |
| Weight incl. packaging                  | 7.6             |
| Switching input                         | Yes             |
| Emergency light blocking                | No              |
| Battery connection                      | No              |
| Dimming function                        | No              |
| Luminous flux mains                     | 610 lm          |
| Luminous flux emergency                 | 610 lm          |
| EOF                                     | 1               |
| Customs tariff number                   | 94056180        |
| GTIN                                    | 4260766557408   |



## TECHNICAL DRAWING

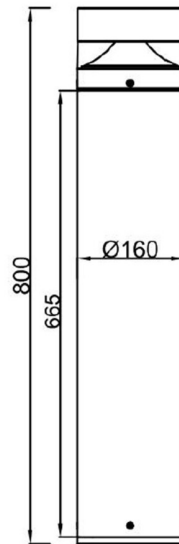

As of: 26.08.2026 - Subject to technical changes and errors.