



Art.-Nr: PMD423SC-TT
Exit sign, Emergency light
Surface mounting, 20 m, IP65, Polycarbonate, White, Set of
pictograms, low-temperature batteries

Polycarbonate emergency exit sign luminaire with trapezoid surround.

To help with mounting, levelling screws are integrated to compensate for uneven surfaces.

The luminaire can be mounted by fitting on the wall and ceiling as well as fitting in the ceiling in conjunction with the mounting frame available.

The set of pictograms is inserted on the inside and secured without the use of solvents.

Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (2x man in the door and 2 straight arrows) are supplied as standard. The designation "TT" stands for **low-temperature batteries**. These special **lithium iron phosphate batteries** are designed to function reliably even at low temperatures. They offer stable performance and a long lifespan, even under demanding conditions.



More information

www.rp-group.com/en/item/PMD423SC-TT




TECHNICAL DATA

Luminaire type	Exit sign, Emergency light
Mounting	Surface mounting
Recognition distance	20 m
Pictograph	Set
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	WEEE, CE, 5 years warranty, HACCP
Insulation class	2
Monitoring	SelfControl (SC)
Battery	/
Ambient temperature maintained mode	-15 °C to 40 °C



Ambient temperature non-maintained mode	-15 °C to 40 °C
Depth	168 mm
Width	236 mm
Height	136 mm
Weight	0.8
Weight incl. packaging	0.9
Customs tariff number	94056180
GTIN	4260766557743

TECHNICAL DRAWING

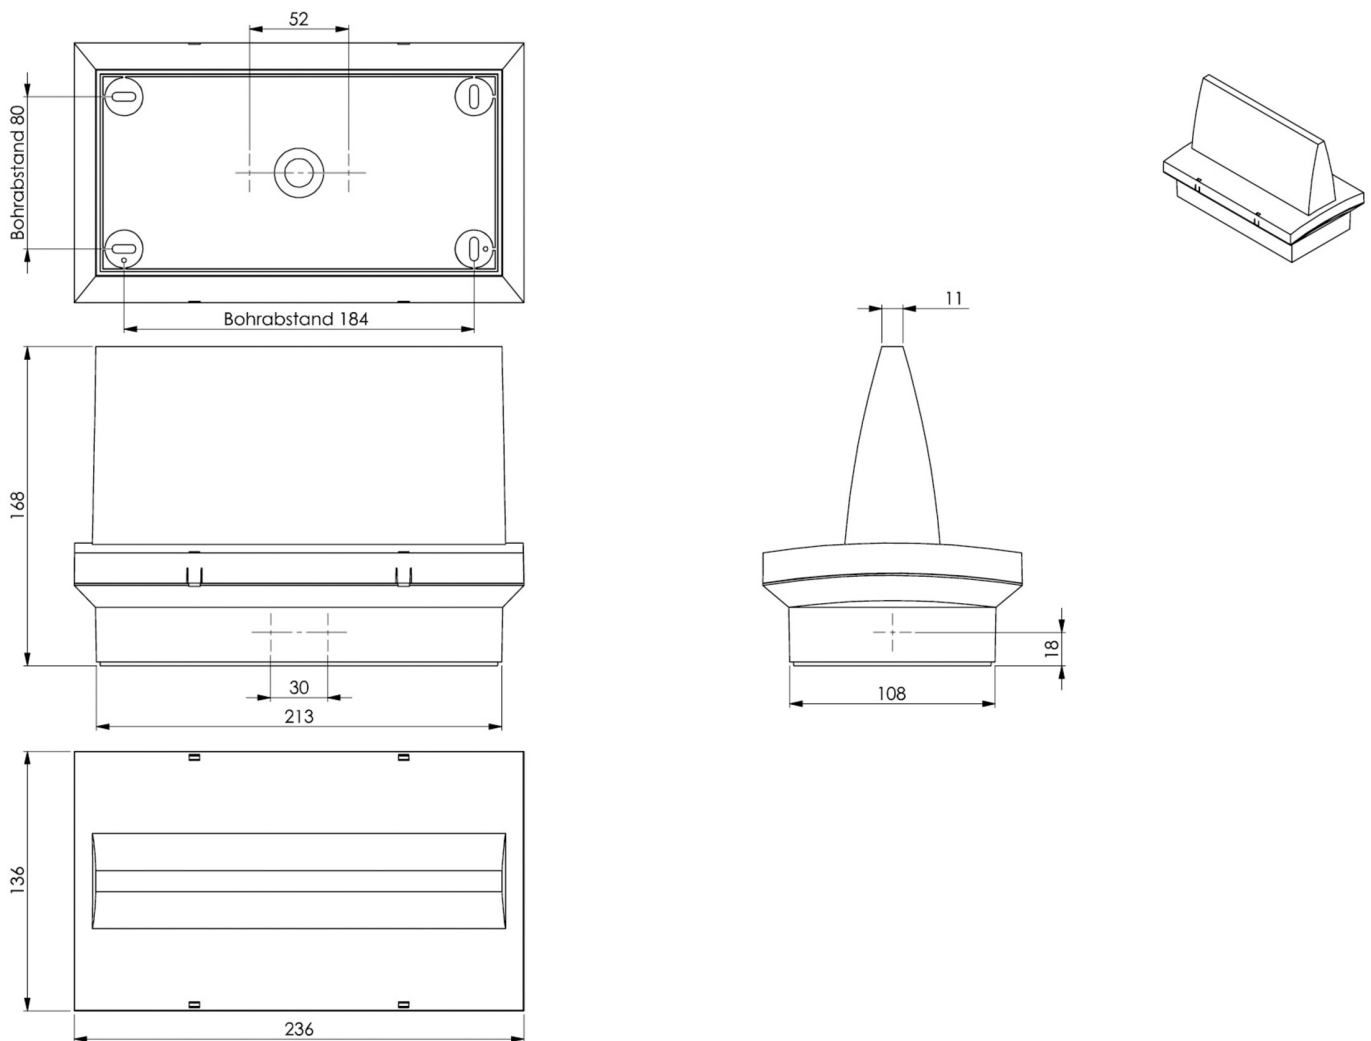



ACCESSORY LIST

PME - Professional module housing for sophisticated electrical engineering

LFP3233.01-TT-SET-2AKKUS - Battery

As of: 04.08.2026 - Subject to technical changes and errors.