RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

## Art.-Nr: KFMU009ML
## Exit sign Centralised power supply systems Universal, Central power supply (ML), CPS, 20 m, IP40, Polycarbonate, White, Set of pictograms



Slim and elegant emergency exit sign luminaire with convex, clear, closed surround, which tapers downwards in a continuous and symmetrical manner. Suited to universal mounting, i.e. fitting on a wall and ceiling, as well as for inscription on one or two sides. The pictograms are on the inside and are inserted without the use of solvents.

Control and monitoring via central power supply system. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (2x man in the door and 2 straight arrows) are supplied as standard.

CE


More information
www.rp-group.com/en/item/KFMU009ML


## TECHNICAL DATA

| | |
|---|---|
| Luminaire type | Exit sign |
| Mounting | Universal |
| Recognition distance | 20 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | Polycarbonate |
| Housing color | White |
| Protection type (IP) | IP40 |
| Impact resistance (IK) | 5 |
| Certification | CE, Waste disposal |
| Insulation class | 2 |
| Supply | Centralised power supply systems |
| Monitoring | Central power supply (ML) |
| Bridging time | CPS |
| Battery | / |
| Operating mode | single luminaire switching |
| Input voltage AC | 230 V |

| | |
|---|---|
| Input frequency | 50 / 60 Hz |
| Input voltage DC | 216 V |
| Power max. | 2,7 W |
| Power maintained | 2,7 W |
| Power non-maintained | 0,9 W |
| Ambient temperature maintained mode | -20 °C to 40 °C |
| Ambient temperature non-maintained mode | -20 °C to 40 °C |
| Depth | 212 mm |
| Width | 31 mm |
| Height | 141 mm |
| Weight | 0.25 |
| Weight incl. packaging | 0.35 |
| Connection cross-section | 2,5 mm² |
| Switching input | No |
| Emergency light blocking | No |
| Battery connection | No |
| Dimming function | Yes |
| Customs tariff number | 94056180 |
| GTIN | 4260766558511 |

## TECHNICAL DRAWING

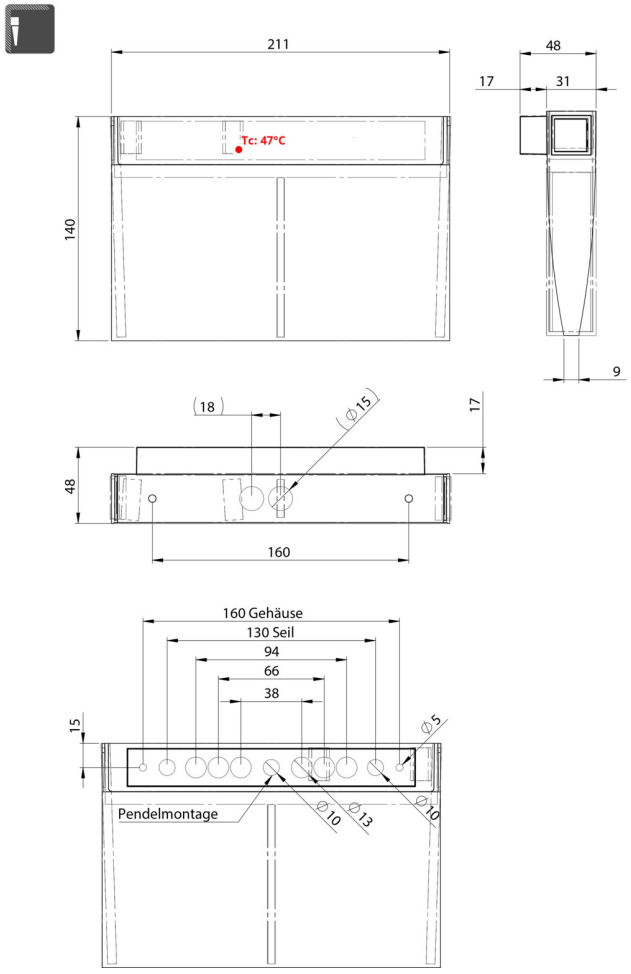

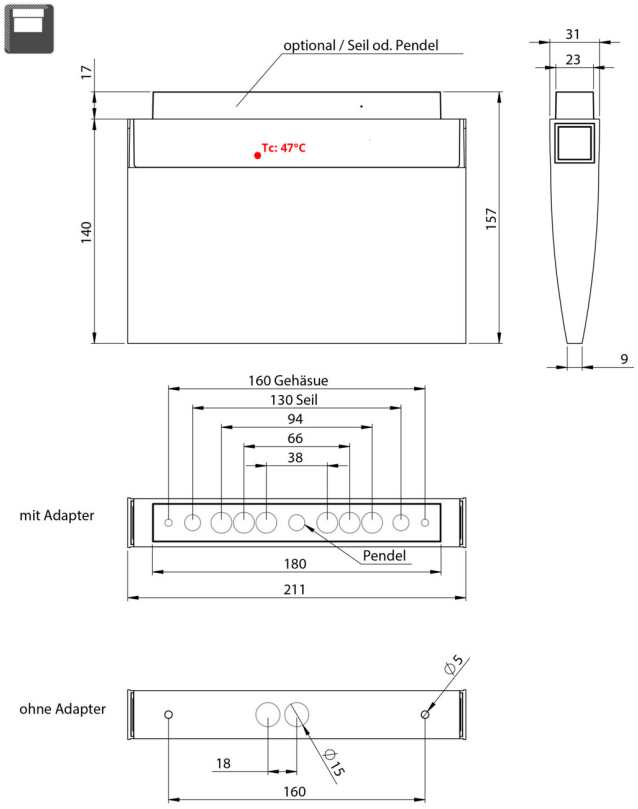
As of: 18.11.2026 - Subject to technical changes and errors.