RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

Art.-Nr: KXU413WL
Exit sign Self-contained Universal, Wireless Professional (WL), 3 h, 30 m, IP40, Polycarbonate, White, Set of pictograms, Universal mounting



Innovative plastic emergency exit sign luminaire for universal mounting, in a conically tapering housing producing an appealing look. Suited to inscription on one or two sides.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard. Universal mounting includes fitting on the wall and ceiling as well as the option of fitting in the ceiling in conjunction with the mounting frame available.

CE

5 JAHRE 5 YEARS GARANTIE WARRANTY


More information
www.rp-group.com/en/item/KXU413WL

TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Universal
Recognition distance	30 m
Pictograph	Set
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	Waste disposal, CE, 5 Years waranty
Insulation class	2
Supply	Self-contained
Monitoring	Wireless Professional (WL)
Bridging time	3 h
Battery	LiFePO4 3,2 V/1,6 Ah
Operating mode	Non-maintained / maintained

Input voltage AC	230 V
Input frequency	50 Hz
Power max.	5,3 W
Power maintained	4,3 W
Power non-maintained	0,7 W
Ambient temperature maintained mode	-5 °C to 35 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	48 mm
Width	332 mm
Height	242 mm
Weight	0.9
Weight incl. packaging	1.01
Connection cross-section	2.5 mm²
Switching input	Yes
Emergency light blocking	Yes
Battery connection	Connector
Dimming function	Yes
Luminous flux mains	305 lm
Luminous flux emergency	180 lm
Customs tariff number	94056120
GTIN	4262483026168

TECHNICAL DRAWING

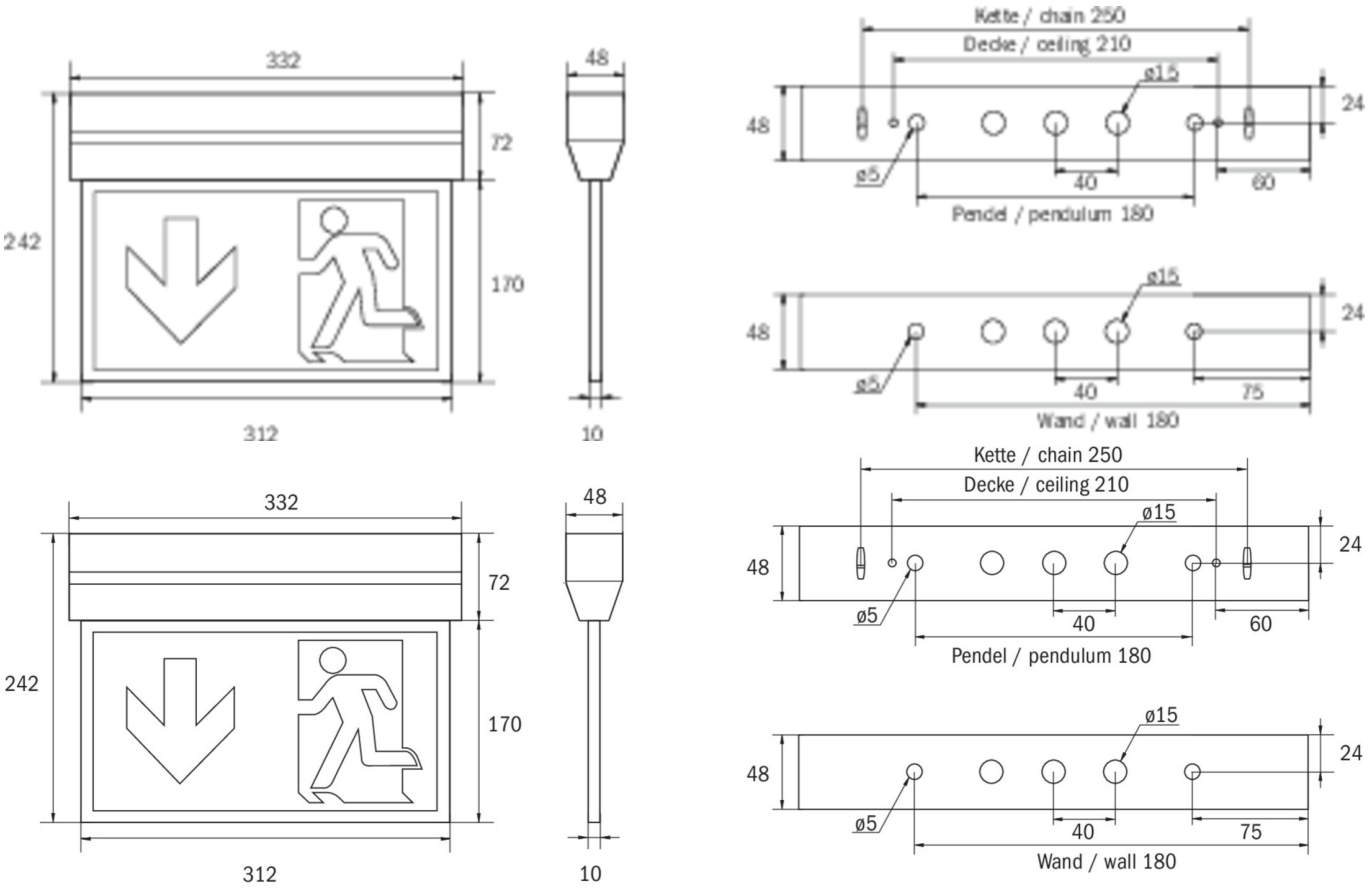

ACCESSORY LIST

KXE-EB - Installation frame for KX emergency lights: Elegant recessed wall mounting

AWX001 - AWX wall bracket for emergency lights - 90° flag mounting

DSA - Wire suspension

2PW-EB - Pendant

2DW-EB - Pre-assembled designer pendant pair with fixed canopy, 4-core, white

KXBE - Concrete installation box for ceiling formwork installation for emergency lighting

LFP3216-SET-2AKKU - Battery

As of: 13.11.2026 - Subject to technical changes and errors.