



**Art.-Nr: KXU413WL**  
**Exit sign Self-contained**  
**Universal, 3 h, 30 m, IP40, Polycarbonate, White, Set of**  
**pictograms, Universal mounting**

Innovative plastic emergency exit sign luminaire for universal mounting, in a conically tapering housing producing an appealing look. Suited to inscription on one or two sides.



Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard. Universal mounting includes fitting on the wall and ceiling as well as the option of fitting in the ceiling in conjunction with the mounting frame available.



More information

[www.rp-group.com/en/item/KXU413WL](http://www.rp-group.com/en/item/KXU413WL)



## TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Universal
Recognition distance	30 m
Pictograph	Set
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	WEEE, CE, 5 years warranty
Insulation class	2
Supply	Self-contained
Monitoring	Wireless Professional (WL)
Bridging time	3 h
Battery	LiFePO4 3,2 V/1,6 Ah
Operating mode	Non-maintained / maintained



Input voltage AC	230 V
Input frequency	50 Hz
Power max.	5,3 W
Power maintained	4,3 W
Power non-maintained	0,7 W
Ambient temperature maintained mode	-5 °C to 35 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	48 mm
Width	332 mm
Height	242 mm
Weight	0.9
Weight incl. packaging	1.01
Connection cross-section	2.5 mm <sup>2</sup>
Switching input	Yes
Emergency light blocking	Yes
Battery connection	Connector
Dimming function	Yes
Luminous flux mains	305 lm
Luminous flux emergency	180 lm
Customs tariff number	94056120
GTIN	4262483026168



## TECHNICAL DRAWING

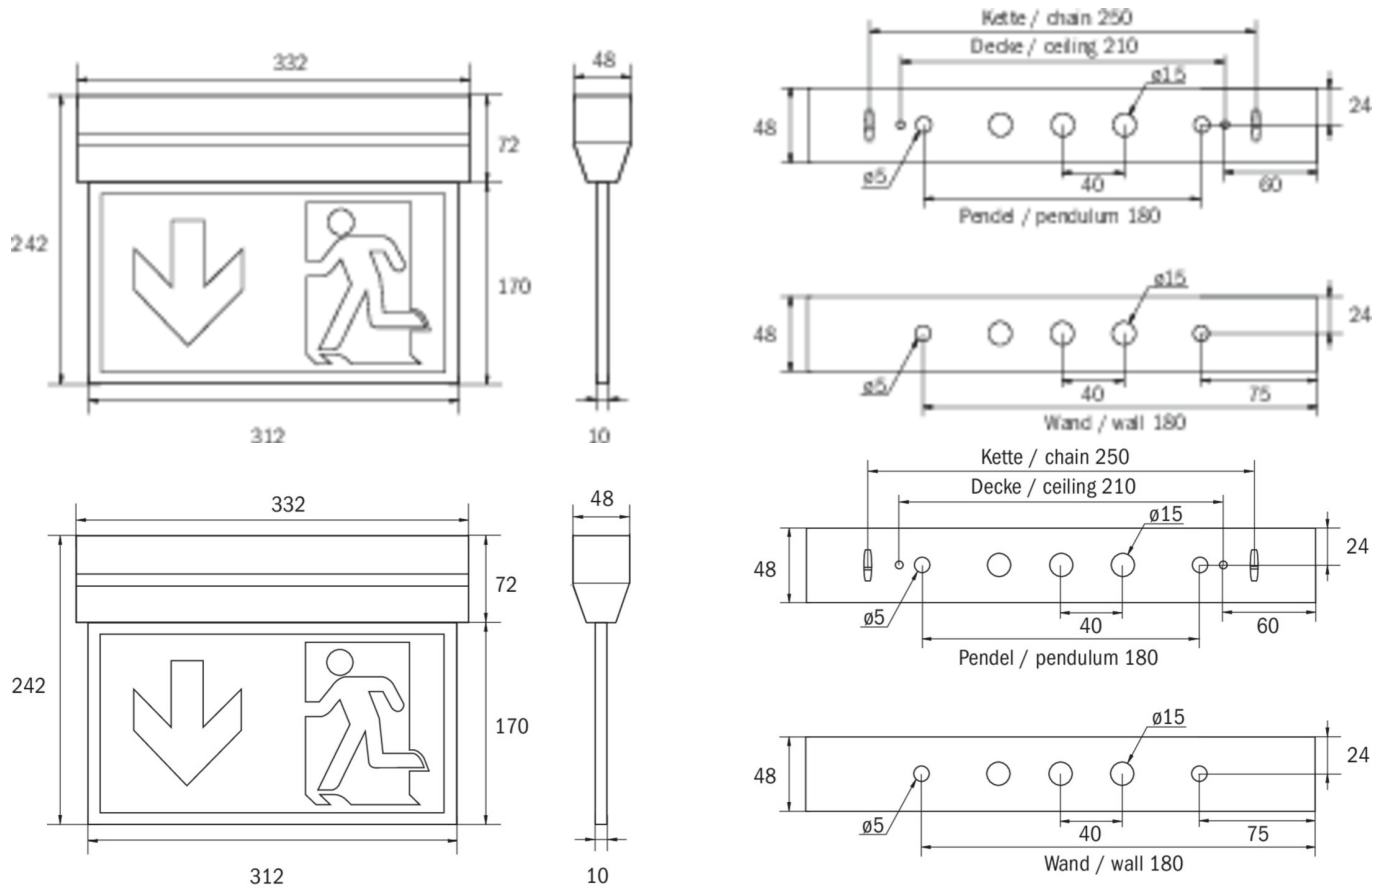

## ACCESSORY LIST

- KXE-EB - Installation frame for KX emergency lights: Elegant recessed wall mounting
- AWX001 - AWX wall bracket for emergency lights - 90° flag mounting
- DSA - Wire suspension
- 2PW-EB - Pendant
- 2DW-EB - Pre-assembled designer pendant pair with fixed canopy, 4-core, white
- KXBE - Concrete installation box for ceiling formwork installation for emergency lighting
- LFP3216-SET-2AKKU - Battery

As of: 05.07.2026 - Subject to technical changes and errors.