Art.-Nr: WHXD418WL-TT
Exit sign Self-contained
Surface mounting, Wireless Professional (WL), 8 h, 30 m, IP65, Polycarbonate, White, printed pictograms, low-temperature batteries



Modern emergency exit sign cube luminaire for identifying escape and emergency routes with easy-to-mount bayonet catch. It can be mounted straight onto the ceiling or suspended using the appropriate accessories.

The cube shape means that this plastic luminaire is easily recognisable from four sides. Ideal for use where routes intersect, e.g. in large stores with aisles.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. Planning certainty is provided by printed pictograms, determined on the basis of logic. The pictograms used correspond to DIN ISO 7010 (arrow to the right, left and down). The designation "TT" stands for low-temperature batteries. These special lithium iron phosphate batteries are designed to function reliably even at low temperatures. They offer stable performance and a long lifespan, even under demanding conditions.


More information
www.rp-group.com/en/item/WHXD418WL-TT


TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Surface mounting
Recognition distance	30 m
Pictograph	Set
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	4
Certification	Waste disposal, CE, 5 Years waranty, D-sign
Insulation class	2
Supply	Self-contained
Monitoring	Wireless Professional (WL)
Bridging time	8 h

Battery	LiFePO4 3,2 V/3,3 Ah
Operating mode	Non-maintained / maintained
Input voltage AC	230 V
Input frequency	50 Hz
Power max.	7,5 W
Power maintained	5,7 W
Power non-maintained	0,8 W
Ambient temperature maintained mode	-15 °C to 40 °C
Ambient temperature non-maintained mode	-15 °C to 40 °C
Depth	300 mm
Width	300 mm
Height	179.5 mm
Weight	1.71
Weight incl. packaging	1.94
Connection cross-section	2.5 mm²
Switching input	Yes
Emergency light blocking	Yes
Battery connection	Connector
Dimming function	Yes
Luminous flux mains	250 lm
Luminous flux emergency	245 lm
Customs tariff number	94056120
GTIN	4260766559693

TECHNICAL DRAWING

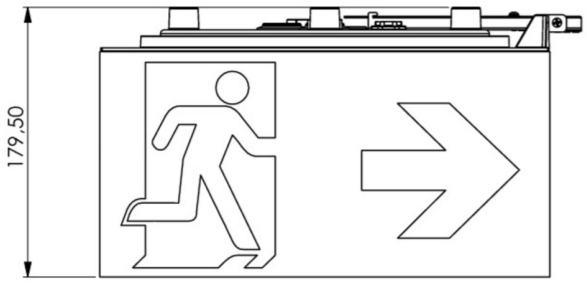

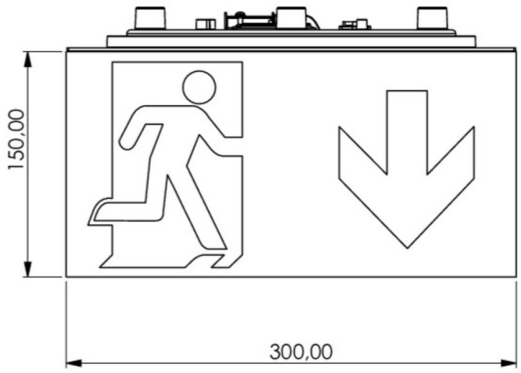

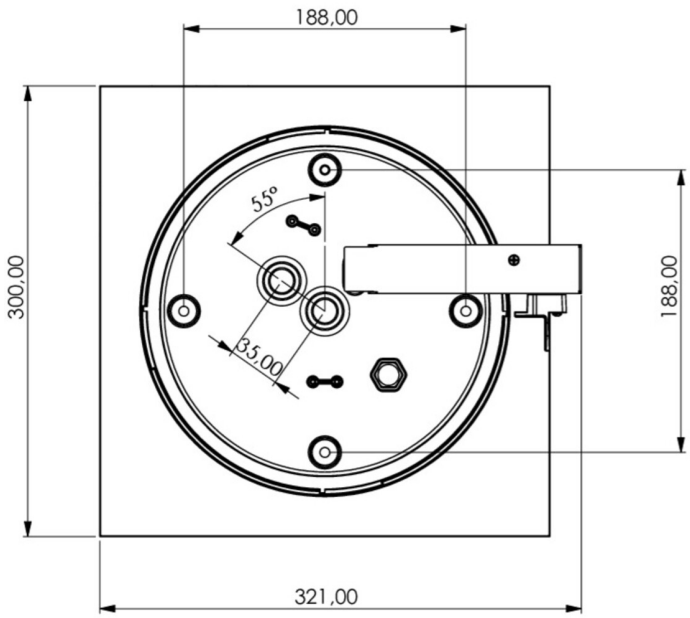

ACCESSORY LIST

WKO - Set of chain eyelets for cube mounting (4 pieces)

DSA-Y4M - Wire suspension

DSA-Y4M-APA - Wire suspension

As of: 13.11.2026 - Subject to technical changes and errors.