## Art.-Nr: KMB411WB
## Emergency light Self-contained Universal, Wireless Basic (WB), 1 h, IP54, Polycarbonate, White, Universal mounting



Compact safety luminaire for universal mounting. The narrow rectangular plastic housing is discreetly reduced to the essentials. Illumination of the escape and emergency routes is assisted by the optics integrated in the surround.

Wireless control and monitoring for small installations of up to 50 luminaires with Wireless Basic. Universal mounting includes fitting on the wall and ceiling as well as the option of fitting in the ceiling in conjunction with the mounting frame available.


More information
www.rp-group.com/en/item/KMB411WB

## TECHNICAL DATA

| | |
|---|---|
| Luminaire type | Emergency light |
| Mounting | Universal |
| Pictograph | No |
| Illuminant | LED |
| Housing material | Polycarbonate |
| Housing color | White |
| Protection type (IP) | IP54 |
| Impact resistance (IK) | ≥ 3 |
| Certification | Waste disposal, CE, 5 Years waranty |
| Insulation class | 2 |
| Supply | Self-contained |
| Monitoring | Wireless Basic (WB) |
| Bridging time | 1 h |
| Battery | LiFePO4 3,2 V/1,6 Ah |
| Operating mode | Non-maintained / maintained |
| Input voltage AC | 230 V |
| Input frequency | 50 / 60 Hz |
| Input voltage DC | - V |
| Power max. | 5,3 W |

| | |
|---|---|
| Power maintained | 3,9 W |
| Power non-maintained | 1,5 W |
| Ambient temperature maintained mode | -10 °C to 40 °C |
| Ambient temperature non-maintained mode | -5 °C to 40 °C |
| Depth | 250 mm |
| Width | 34 mm |
| Height | 50 mm |
| Weight | 0.55 |
| Weight incl. packaging | 0.62 |
| Connection cross-section | 2.5 mm² |
| Switching input | Yes |
| Emergency light blocking | No |
| Battery connection | Connector |
| Dimming function | No |
| Luminous flux mains | 190 lm |
| Luminous flux emergency | 190 lm |
| Customs tariff number | 94056180 |
| GTIN | 4260766559945 |

## TECHNICAL DRAWING

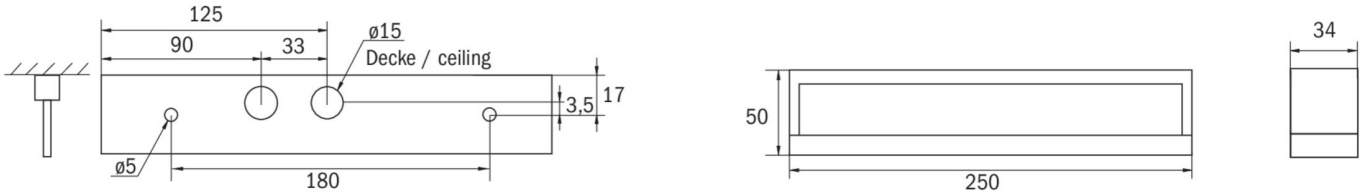


## ACCESSORY LIST

KME-EB - Mounting frame

BALL1 - Wire mesh guard

KMBE - Concrete-mounted box

BALLPLX-KMB - Ball impact-resistant protective cover (PMMA) transparent for lights - KMB

KMBFH - Customisable positioning for optimal emergency exit lighting – 249 x 40 mm

LFPN3216.01 - Battery

As of: 13.11.2026 - Subject to technical changes and errors.