RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

# Art.-Nr: ASMU418WB
# Exit sign Self-contained Universal, Wireless Basic (WB), 8 h, 22 m, IP40, Aluminum, Anodised aluminium, Set of pictograms



Multi-functional aluminium emergency exit sign luminaire for universal mounting. As a result of the clever structure, the recesses for cable entry and fastening are integrated, both for ceiling and wall mounting. Visually appealing side parts cover the lock mechanism so that the luminaire conveys a harmonious and fully closed impression.

Wireless control and monitoring for small installations of up to 50 luminaires with Wireless Basic. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.

CE

5 JAHRE 5 YEARS GARANTIE WARRANTY


More information
www.rp-group.com/en/item/ASMU418WB


## TECHNICAL DATA

| | |
|---|---|
| Luminaire type | Exit sign |
| Mounting | Universal |
| Recognition distance | 22 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | Aluminum |
| Housing color | Anodised aluminium |
| Protection type (IP) | IP40 |
| Impact resistance (IK) | 3 |
| Certification | Waste disposal, CE, 5 Years waranty |
| Insulation class | 1 |
| Supply | Self-contained |
| Monitoring | Wireless Basic (WB) |
| Bridging time | 8 h |
| Battery | LiFePO4 3,2 V/3,3 Ah |
| Operating mode | Non-maintained / maintained |
| Input voltage AC | 230 V |

| | |
|---|---|
| Input frequency | 50 / 60 Hz |
| Input voltage DC | - V |
| Power max. | 5,3 W |
| Power maintained | 3,9 W |
| Power non-maintained | 1,5 W |
| Ambient temperature maintained mode | -5 °C to 40 °C |
| Ambient temperature non-maintained mode | -5 °C to 40 °C |
| Depth | 54 mm |
| Width | 277 mm |
| Height | 184 mm |
| Weight | 0.89 |
| Weight incl. packaging | 1.06 |
| Connection cross-section | 2.5 mm² |
| Switching input | Yes |
| Emergency light blocking | No |
| Battery connection | Connector |
| Dimming function | No |
| Luminous flux mains | 190 lm |
| Luminous flux emergency | 85 lm |
| Customs tariff number | 94056180 |
| GTIN | 4260766559907 |

## TECHNICAL DRAWING

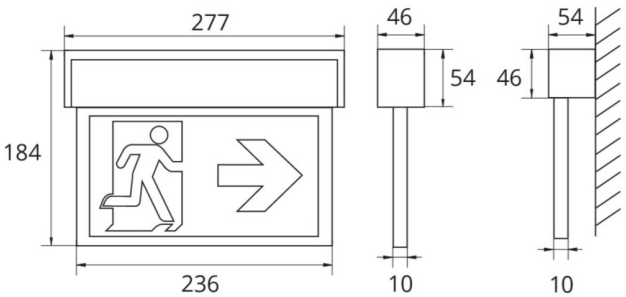
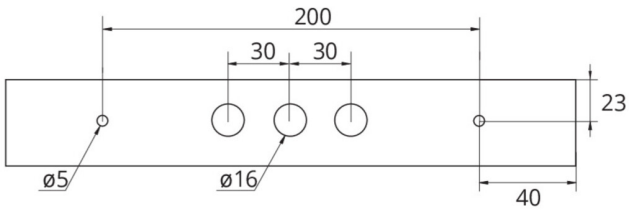
## ACCESSORY LIST

DSA - Wire suspension

2PS-EB - Pendant

BALLPLX-KMU.01 - Ball impact-resistant protective cover (PMMA) transparent for lights - KMU, KSU und ASMU

As of: 11.11.2026 - Subject to technical changes and errors.