RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

# Art.-Nr: KMMU413WB
# Exit sign Self-contained Universal, Wireless Basic (WB), 3 h, 24 m, IP43, Polycarbonate, White, Set of pictograms, Universal mounting



Slim convex emergency exit sign luminaire with clear, closed surround, which tapers downwards in a continuous and symmetrical manner. Suited to inscription on one or two sides. The pictograms are on the inside and are inserted without the use of solvents.

Thanks to the snap-in mechanism between the upper and lower part, the luminaire has a harmonious look and appears closed all the way round. The luminaire is connected to the mains in the ceiling section. When closed, the luminaire is powered via contact plugs. This greatly simplifies mounting and makes convenient connection possible despite the small size of the luminaire.

Wireless control and monitoring for small installations of up to 50 luminaires with Wireless Basic. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard. Universal mounting includes fitting on the wall and ceiling as well as the option of fitting in the ceiling in conjunction with the mounting frame available.

CE

5 JAHRE 5 YEARS GARANTIE WARRANTY


More information
www.rp-group.com/en/item/KMMU413WB

## TECHNICAL DATA

| | |
|---|---|
| Luminaire type | Exit sign |
| Mounting | Universal |
| Recognition distance | 24 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | Polycarbonate |
| Housing color | White |
| Protection type (IP) | IP43 |
| Impact resistance (IK) | 3 |
| Certification | Waste disposal, CE, 5 Years waranty |
| Insulation class | 2 |
| Supply | Self-contained |
| Monitoring | Wireless Basic (WB) |

| | |
|---|---|
| Bridging time | 3 h |
| Battery | LiFePO4 3,2 V/1,6 Ah |
| Operating mode | Non-maintained / maintained |
| Input voltage AC | 230 V |
| Input frequency | 50 / 60 Hz |
| Input voltage DC | - V |
| Power max. | 5,3 W |
| Power maintained | 3,9 W |
| Power non-maintained | 1,5 W |
| Ambient temperature maintained mode | -5 °C to 40 °C |
| Ambient temperature non-maintained mode | -5 °C to 40 °C |
| Depth | 35 mm |
| Width | 251 mm |
| Height | 173 mm |
| Weight | 0.67 |
| Weight incl. packaging | 0.77 |
| Connection cross-section | 2.5 mm² |
| Switching input | Yes |
| Emergency light blocking | No |
| Battery connection | Connector |
| Dimming function | No |
| Luminous flux mains | 190 lm |
| Luminous flux emergency | 190 lm |
| Customs tariff number | 94056120 |
| GTIN | 4260766559822 |

## TECHNICAL DRAWING

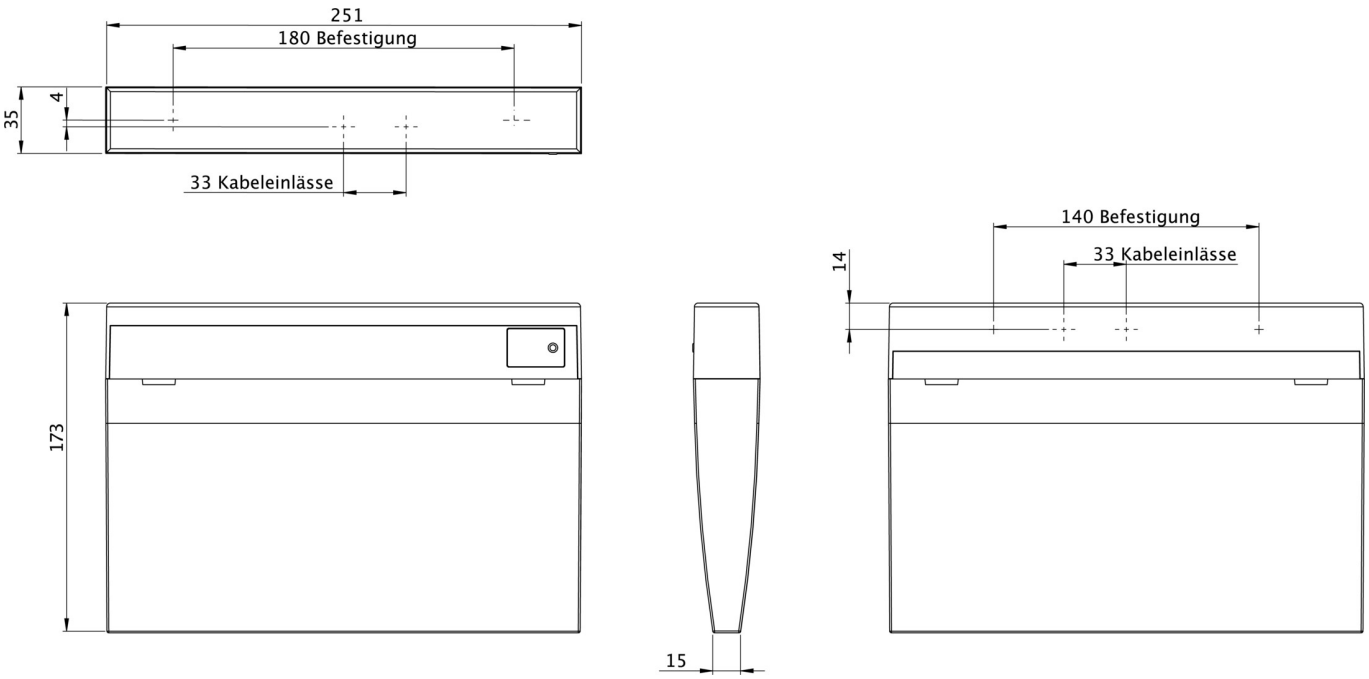


## ACCESSORY LIST

DSA - Wire suspension

KME-EB - Mounting frame

KMBE - Concrete-mounted box

AWKSU - Wall bracket

2PW-EB - Pendant

BALLPLX-KMU.01 - Ball impact-resistant protective cover (PMMA) transparent for lights - KMU, KSU und ASMU

As of: 01.11.2026 - Subject to technical changes and errors.