RP GROUP
SOLUTIONS IN SAFETY + LIGHTING

## Art.-Nr: KSC411WB-SW
## Exit sign, Emergency light Self-contained Universal, Wireless Basic (WB), 1 h, 22 m, IP54, Polycarbonate, Black, Set of pictograms, Universal mounting




Innovative plastic emergency exit sign and safety luminaire for universal mounting. Suited to inscription on one or two sides, as well as illumination of firefighting and first aid stations, with the 5 lux rating required as a minimum according to EN 1838.

Thanks to the snap-in mechanism between the upper and lower part, the luminaire has a harmonious look and appears closed all the way round. The luminaire is connected to the mains in the ceiling section. When closed, the luminaire is powered via contact plugs. This greatly simplifies mounting and makes convenient connection possible despite the small size of the luminaire.

Wireless control and monitoring for small installations of up to 50 luminaires with Wireless Basic. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard. Universal mounting includes fitting on the wall and ceiling as well as the option of fitting in the ceiling in conjunction with the mounting frame available.

CE


More information
www.rp-group.com/en/item/KSC411WB-SW

## TECHNICAL DATA

| | |
|---|---|
| Luminaire type | Exit sign, Emergency light |
| Mounting | Universal |
| Recognition distance | 22 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | Polycarbonate |
| Housing color | Black |
| Protection type (IP) | IP54 |
| Impact resistance (IK) | ≥ 3 |
| Certification | Waste disposal, CE, 5 Years waranty |
| Insulation class | 2 |
| Supply | Self-contained |
| Monitoring | Wireless Basic (WB) |

| | |
|---|---|
| Bridging time | 1 h |
| Battery | LiFePO4 3,2 V/1,6 Ah |
| Operating mode | Non-maintained / maintained |
| Input voltage AC | 230 V |
| Input frequency | 50 / 60 Hz |
| Input voltage DC | - V |
| Power max. | 5,3 W |
| Power maintained | 3,9 W |
| Power non-maintained | 1,5 W |
| Ambient temperature maintained mode | -10 °C to 40 °C |
| Ambient temperature non-maintained mode | -10 °C to 40 °C |
| Depth | 34 mm |
| Width | 250 mm |
| Height | 174 mm |
| Weight | 0.67 |
| Weight incl. packaging | 0.75 |
| Connection cross-section | 2.5 mm² |
| Switching input | Yes |
| Emergency light blocking | No |
| Battery connection | Connector |
| Dimming function | No |
| Luminous flux mains | 190 lm |
| Luminous flux emergency | 190 lm |
| EOF | 1 |
| Customs tariff number | 94056120 |
| GTIN | 4262483020173 |

## TECHNICAL DRAWING

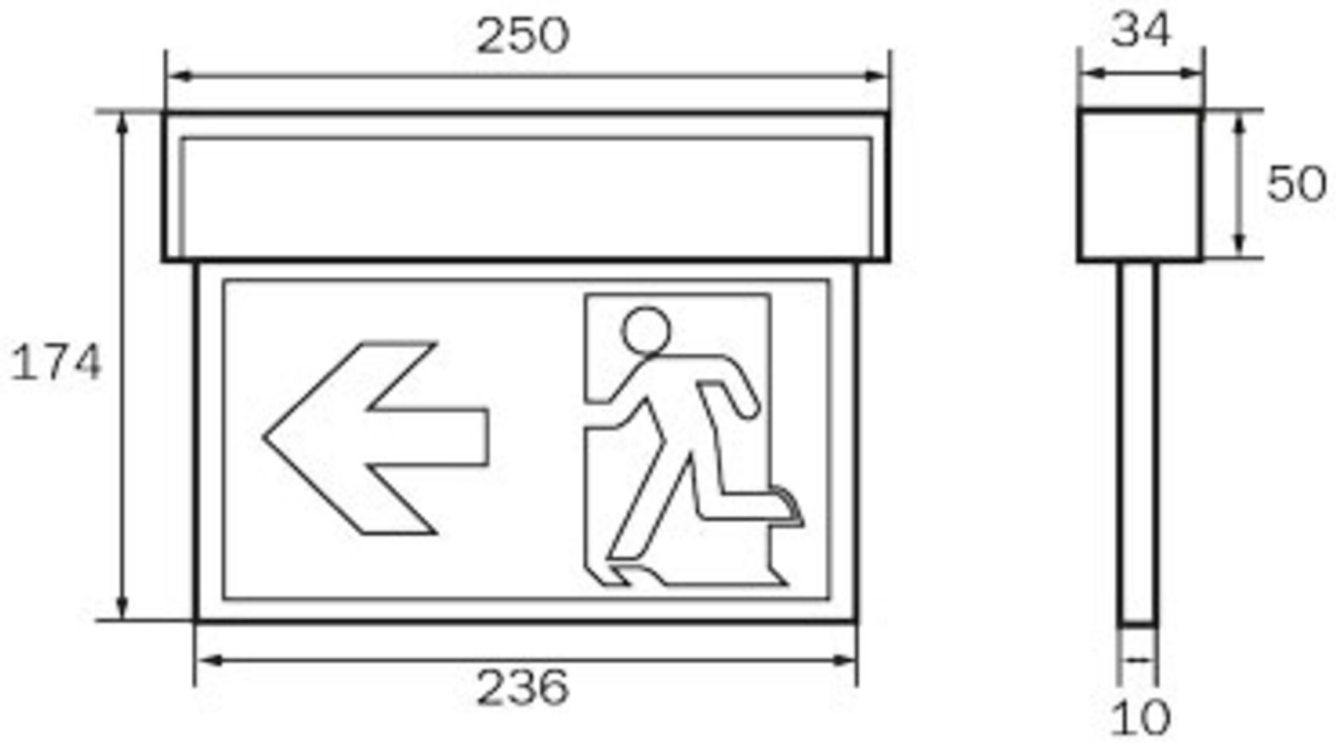


## ACCESSORY LIST

DSA - Wire suspension

2PSW-EB - Pre-assembled pendant set for escape sign luminaires

KS4FIRE - Comprehensive pictogram set for firefighting and alarm equipment (8 pieces)

KS4HELP - Essential pictogram set for safety and emergency signage

BALLPLX-KMU.01 - Ball impact-resistant protective cover (PMMA) transparent for lights - KMU, KSU und ASMU

KMBE - Concrete-mounted box

AWKSU - Wall bracket

As of: 11.11.2026 - Subject to technical changes and errors.