



Art.-Nr: PFD529CC
Exit sign Centralised power supply systems
Surface mounting, CPS, 24 m, IP65, Polycarbonate, White,
Set of pictograms

Trapezoid, plastic emergency exit sign luminaire for fitting on the ceiling for inscription on one or two sides with self-adhesive pictogram.

Control and monitoring via central 24 V low-power system. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left and down) is supplied as standard.



More information
www.rp-group.com/en/item/PFD529CC




TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Surface mounting
Recognition distance	24 m
Pictograph	Set
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	WEEE, CE
Insulation class	1
Supply	Centralised power supply systems
Monitoring	CoreCompact 24 (CC)
Bridging time	CPS
Battery	/
Operating mode	Non-maintained / maintained
Input voltage AC	24 V
Power max.	5,1 W
Power maintained	5,1 W
Power non-maintained	0,4 W
Ambient temperature maintained mode	-20 °C to 40 °C



Ambient temperature non-maintained mode	-20 °C to 40 °C
Depth	152 mm
Width	370 mm
Height	195 mm
Weight	0.85
Weight incl. packaging	0.98
Connection cross-section	2.5 mm ²
Switching input	No
Emergency light blocking	No
Battery connection	No
Customs tariff number	94056120
GTIN	4260682157515

TECHNICAL DRAWING

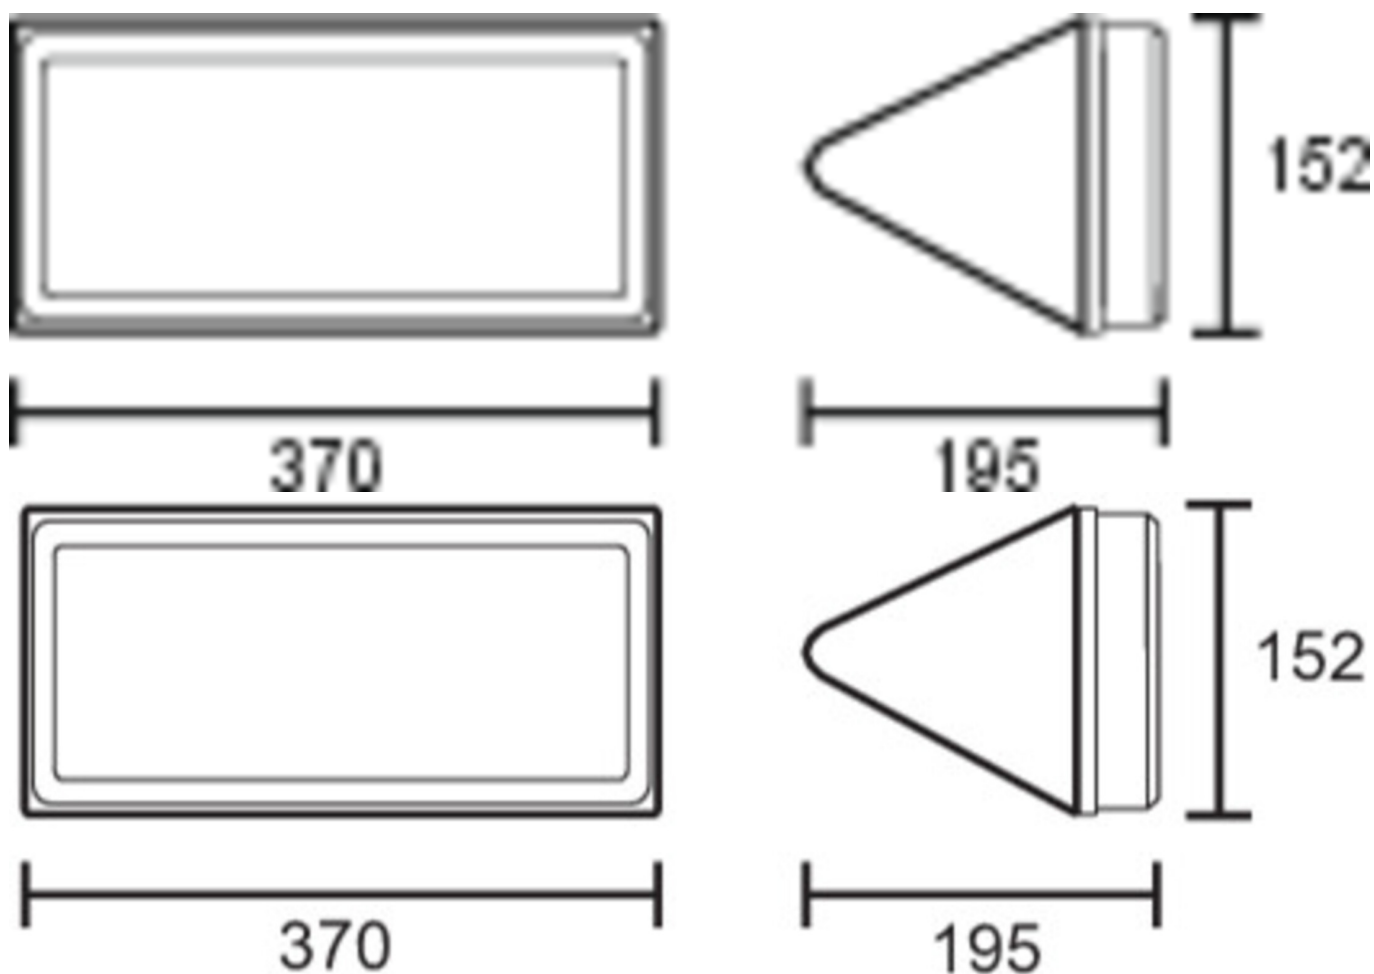



ACCESSORY LIST

- 2PW-EB - Pendant
- 2DW-EB - Pre-assembled designer pendant pair with fixed canopy, 4-core, white
- DSA - Wire suspension
- PFER - High-quality metal mounting frame for PF series emergency lights - 410 x 190 mm