



**Art.-Nr: AMR408SC**  
**Exit sign Self-contained**  
**Recessed wall mounting, 8 h, 22 m, IP40, Zinc die-cast,**  
**White, Set of pictograms**

Modern zinc die-cast emergency exit sign luminaire for recessed mounting in the wall and for identifying emergency and escape routes.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information

[www.rp-group.com/en/item/AMR408SC](http://www.rp-group.com/en/item/AMR408SC)



## TECHNICAL DATA


|                        |                             |
|------------------------|-----------------------------|
| Luminaire type         | Exit sign                   |
| Mounting               | Recessed wall mounting      |
| Recognition distance   | 22 m                        |
| Pictograph             | Set                         |
| Illuminant             | LED                         |
| Housing material       | Zinc die-cast               |
| Housing color          | White                       |
| Protection type (IP)   | IP40                        |
| Impact resistance (IK) | ≥ 3                         |
| Certification          | WEEE, CE, 5 years warranty  |
| Insulation class       | 2                           |
| Supply                 | Self-contained              |
| Monitoring             | SelfControl (SC)            |
| Bridging time          | 8 h                         |
| Battery                | LiFePO4 3,2 V/1,2 Ah        |
| Operating mode         | Non-maintained / maintained |
| Input voltage AC       | 180 V - 230 V               |



|                                         |                     |
|-----------------------------------------|---------------------|
| Input frequency                         | 50 Hz               |
| Power max.                              | 2,6 W               |
| Power maintained                        | 1,7 W               |
| Power non-maintained                    | 0,9 W               |
| Ambient temperature maintained mode     | -5 °C to 40 °C      |
| Ambient temperature non-maintained mode | -5 °C to 40 °C      |
| Depth                                   | 79 mm               |
| Width                                   | 236 mm              |
| Height                                  | 151 mm              |
| Installation length                     | 176 mm              |
| Installation width                      | 68 mm               |
| Installation height                     | 40 mm               |
| Weight                                  | 1.06                |
| Weight incl. packaging                  | 1.42                |
| Connection cross-section                | 2,5 mm <sup>2</sup> |
| Switching input                         | Yes                 |
| Emergency light blocking                | No                  |
| Battery connection                      | Connector           |
| Dimming function                        | No                  |
| Customs tariff number                   | 94056180            |
| GTIN                                    | 4262483022009       |



## TECHNICAL DRAWING

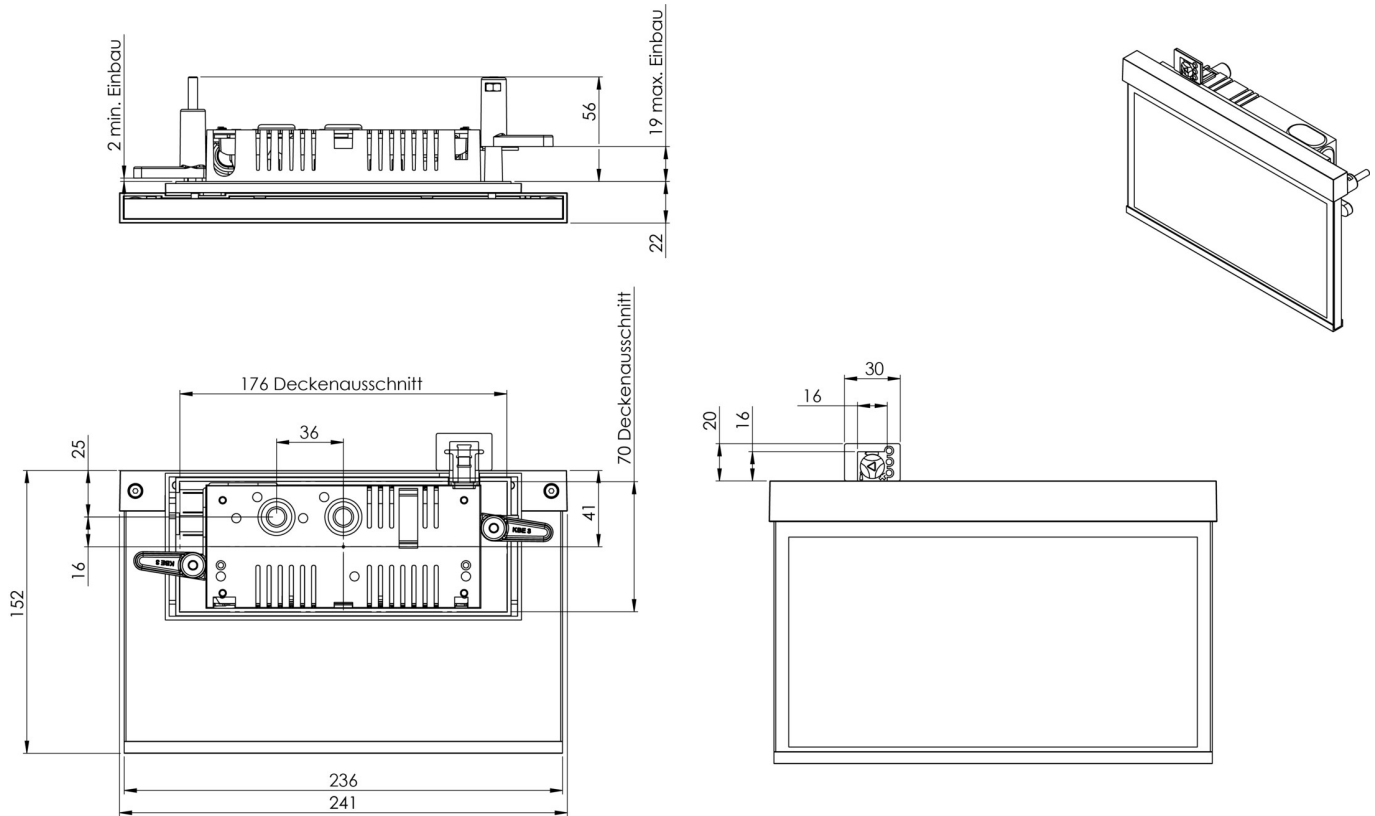

## ACCESSORY LIST

BALLPLX-AM - Ball impact-resistant protective cover (PMMA) for lights - IK10 | Transparent

AM-XBE - Flush-mounted box

As of: 02.09.2026 - Subject to technical changes and errors.