



Art.-Nr: KEU428SC
Emergency light Self-contained
Universal, 8 h, IP40, Polycarbonate, White, Flexiklick

Compact plastic safety luminaire for universal mounting for illuminating escape and emergency routes.

Universal mounting includes fitting on the wall and ceiling as well as the option of fitting in the ceiling in conjunction with the mounting frame available.

Automatic monitoring of safety luminaire with SelfControl. The luminaire is fitted with the innovative flexible plug-in system for rapid use of the right lens. The corridor lens is supplied with every luminaire. A round lens, spotlight lens and beam lens are available as options.



More information

www.rp-group.com/en/item/KEU428SC




TECHNICAL DATA

Luminaire type	Emergency light
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	WEEE, CE, 5 years warranty
Insulation class	2
Supply	Self-contained
Monitoring	SelfControl (SC)
Bridging time	8 h
Battery	LiFePO4 3,2 V/3,3 Ah
Operating mode	Non-maintained / maintained
Input voltage AC	180 V - 250 V
Input frequency	50 Hz
Power max.	6,7 W
Power maintained	5,2 W



Power non-maintained	0,8 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	332 mm
Width	48 mm
Height	72 mm
Weight	0.47
Weight incl. packaging	0.51
Connection cross-section	2,5 mm ²
Switching input	Yes
Emergency light blocking	No
Battery connection	Connector
Dimming function	No
Luminous flux mains	210 lm
Luminous flux emergency	210 lm
Customs tariff number	94056120
GTIN	4262483022740

TECHNICAL DRAWING

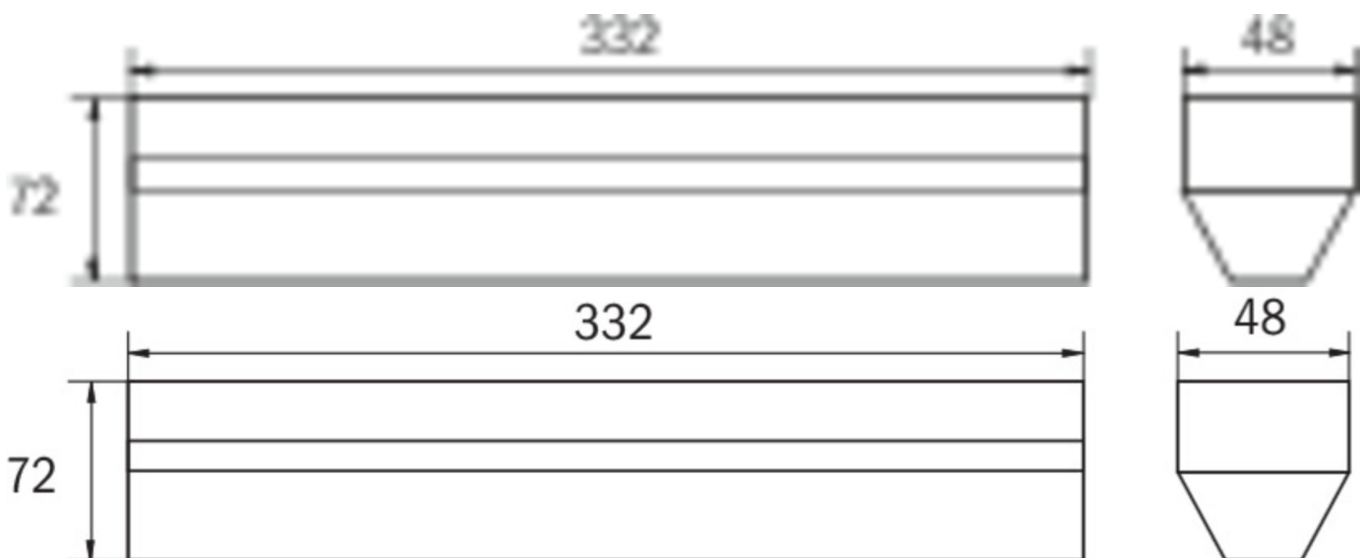



ACCESSORY LIST

DSA - Wire suspension

KEE-EB - Installation frame for KE emergency lights - For discreet ceiling integration

2PW-EB - Pendant

2DW-EB - Pre-assembled designer pendant pair with fixed canopy, 4-core, white

KXBE - Concrete installation box for ceiling formwork installation for emergency lighting

LFP3233-SET-2AKKU - Battery

As of: 06.07.2026 - Subject to technical changes and errors.