




**Art.-Nr: MMD408SC-AZ**  
**Exit sign Self-contained**  
**Surface mounting, 8 h, 21 m, IP40, Zinc die-cast, Anthracite,**  
**Set of pictograms**

Slim, high-quality, zinc die-cast emergency exit sign luminaire with a modern design for ceiling mounting. Suited to inscription on one or two sides.

Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.

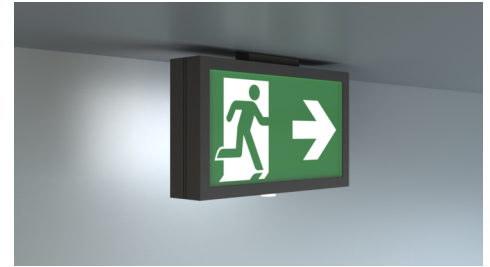

More information

[www.rp-group.com/en/item/MMD408SC-AZ](http://www.rp-group.com/en/item/MMD408SC-AZ)



## TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Surface mounting
Recognition distance	21 m
Pictograph	Set
Illuminant	LED
Housing material	Zinc die-cast
Housing color	Anthracite
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	WEEE, CE, 5 years warranty
Insulation class	1
Supply	Self-contained
Monitoring	SelfControl (SC)
Bridging time	8 h
Battery	LiFePO4 3,2 V/1,2 Ah
Operating mode	Non-maintained / maintained
Input voltage AC	180 V - 230 V
Input frequency	50 Hz
Power max.	2,6 W
Power maintained	1,7 W



Power non-maintained	0,9 W
Ambient temperature maintained mode	-5 °C to 40 °C
Ambient temperature non-maintained mode	-5 °C to 40 °C
Depth	46 mm
Width	236 mm
Height	155 mm
Weight	0.11
Weight incl. packaging	0.23
Connection cross-section	2,5 mm <sup>2</sup>
Switching input	Yes
Emergency light blocking	No
Battery connection	Connector
Dimming function	No
Customs tariff number	94056180
GTIN	4262483022986

## ACCESSORY LIST

LFPN3212-SET-2AKKU - Battery

As of: 04.07.2026 - Subject to technical changes and errors.