



Art.-Nr: PMW408SC-TT
Exit sign Self-contained
Wall mounting, 8 h, 20 m, IP65, Polycarbonate, White, Set of
pictograms, low-temperature batteries

Polycarbonate LED emergency exit sign luminaire with convex shaped cover for wall mounting.

To help with mounting, levelling screws are integrated to compensate for uneven surfaces.

The set of pictograms is inserted on the inside and secured without the use of solvents.

Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (2x man in the door and 2 straight arrows) are supplied as standard. The designation "TT" stands for **low-temperature batteries**. These special **lithium iron phosphate batteries** are designed to function reliably even at low temperatures. They offer stable performance and a long lifespan, even under demanding conditions.



More information

www.rp-group.com/en/item/PMW408SC-TT



TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Wall mounting
Recognition distance	20 m
Pictograph	Set
Illuminant	LED
Housing material	Polycarbonate
Housing color	White
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	WEEE, CE, 5 years warranty, HACCP, D-Sign
Insulation class	2
Supply	Self-contained
Monitoring	SelfControl (SC)
Bridging time	8 h



Battery	LiFePO4 3,2 V/3,3 Ah
Operating mode	Non-maintained / maintained
Input voltage AC	180 V - 250 V
Input frequency	50 Hz
Power max.	5,3 W
Power maintained	4 W
Power non-maintained	2 W
Ambient temperature maintained mode	-15 °C to 40 °C
Ambient temperature non-maintained mode	-15 °C to 40 °C
Depth	65 mm
Width	236 mm
Height	136 mm
Weight	0.76
Weight incl. packaging	0.89
Connection cross-section	2,5 mm ²
Switching input	Yes
Emergency light blocking	No
Battery connection	Connector
Dimming function	No
Customs tariff number	94056120
GTIN	4262483023150



TECHNICAL DRAWING

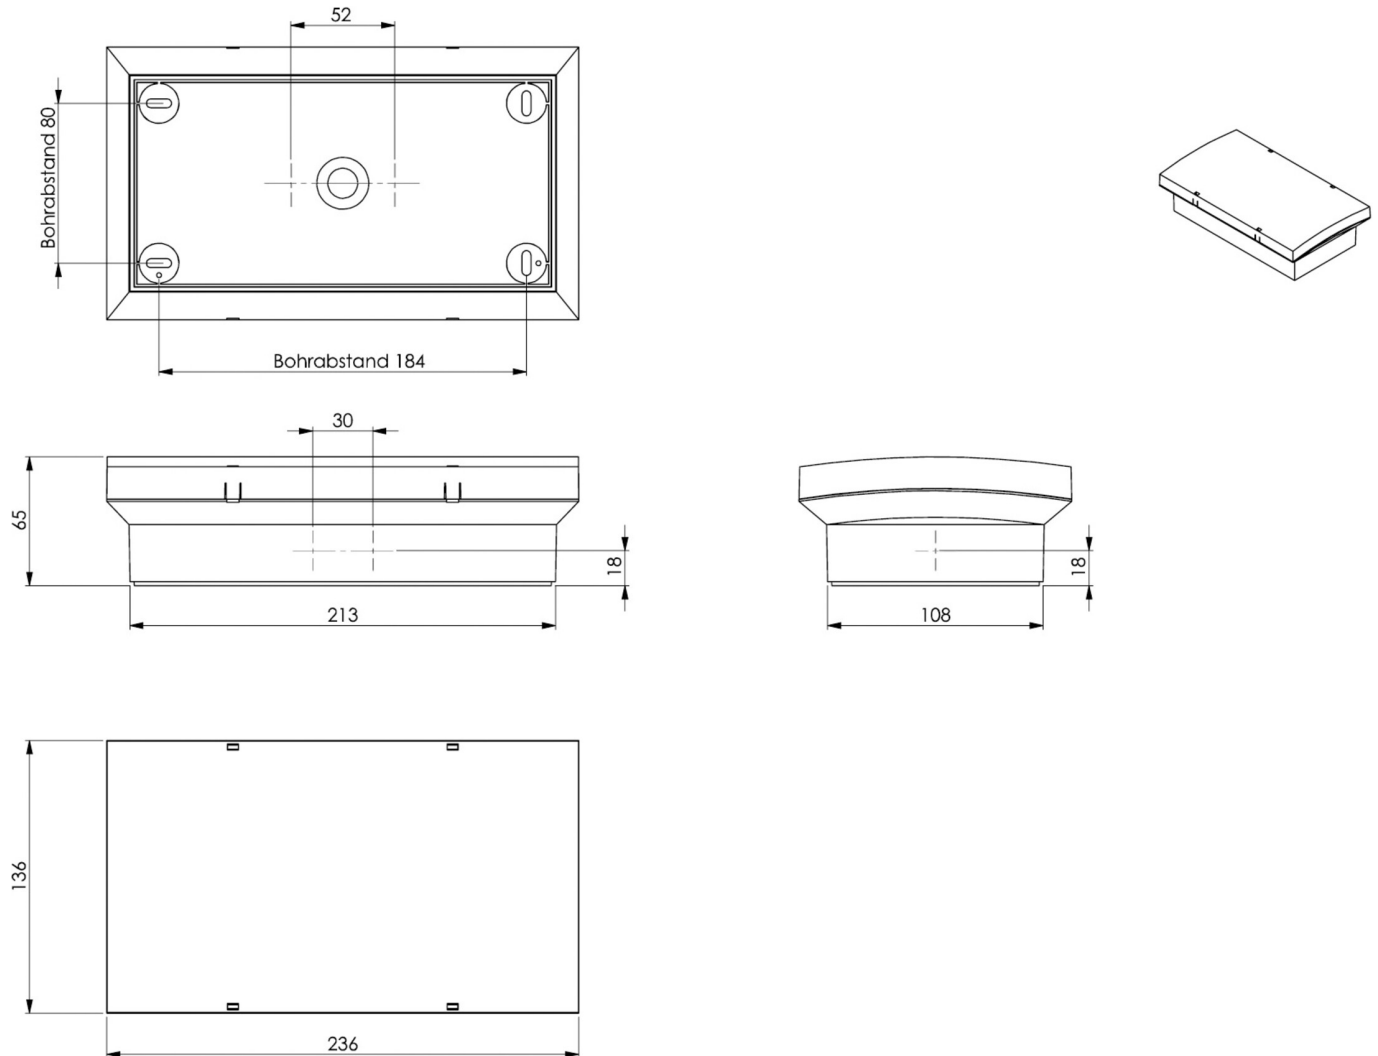

ACCESSORY LIST

PME - Professional module housing for sophisticated electrical engineering
LFPN3233.01-TT - Battery

As of: 24.08.2026 - Subject to technical changes and errors.